

Image Coming Soon

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Chyzel

WS-W98518

PRODUCT DESCRIPTION


Enhance your façade with the Chyzel outdoor wall light, a polished black rectangle framing a clear column of linear rippled glass. Integrated, color temperature selectable LEDs provide textured" illumination that radiates outward, while soft up and down lighting emerges from the top and bottom of the column. Chyzel is offered in 18 and 25-inch sizes and is finished in bold black. "

FEATURES

- Driver concealed within the canopy
- Up, down, and ambient illumination
- Clear ribbed glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Color Temp	4000K,3500K,3000K,2700K
CRI	90
Construction	Extruded aluminum frame with extruded ribbed glass and PC diffuser
Mounting	Can be mounted on wall in all orientations

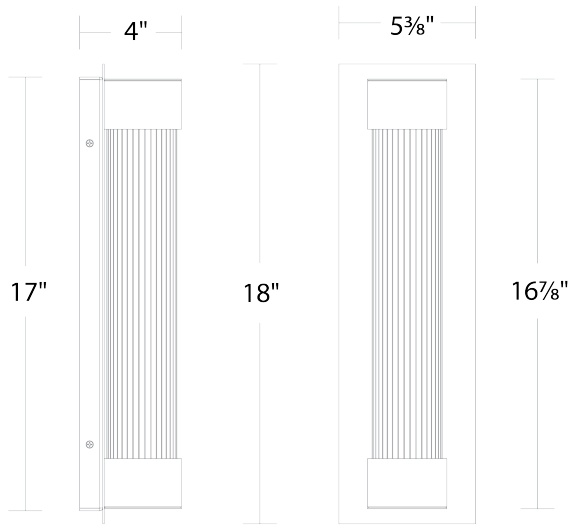

WS-W98518

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W98518 18"	2700K	BK Black	10.8W	702	482
	3000K	BK Black	10.8W	702	494
	3500K	BK Black	10.8W	702	547
	4000K	BK Black	10.8W	702	540

Example: **WS-W98518-40-BK**

For custom requests please contact customs@modernforms.com



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Chyzel

WS-W98526

PRODUCT DESCRIPTION


Enhance your façade with the Chyzel outdoor wall light, a polished black rectangle framing a clear column of linear rippled glass. Integrated, color temperature selectable LEDs provide textured" illumination that radiates outward, while soft up and down lighting emerges from the top and bottom of the column. Chyzel is offered in 18 and 25-inch sizes and is finished in bold black. "

FEATURES

- Driver concealed within the canopy
- Up, down, and ambient illumination
- Clear ribbed glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Color Temp	4000K, 3500K, 3000K, 2700K
CRI	90
Construction	Extruded aluminum frame with extruded ribbed glass and PC diffuser
Mounting	Can be mounted on wall in all orientations

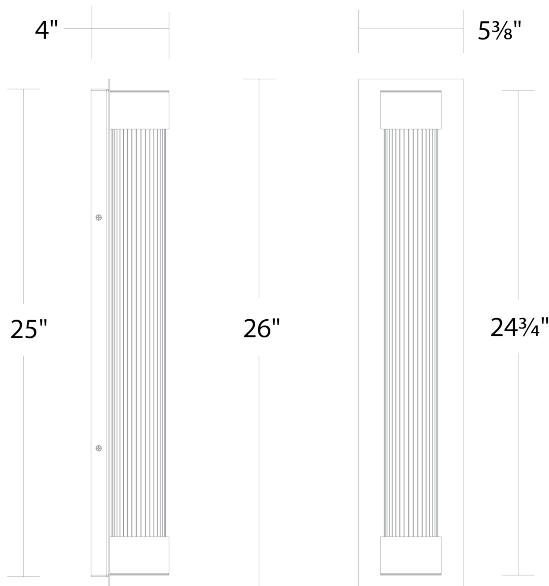

WS-W98526

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W98526 26"	2700K	BK Black	14.6W	1231	933
	3000K	BK Black	14.6W	1231	1004
	3500K	BK Black	14.6W	1231	1047
	4000K	BK Black	14.6W	1231	1023

Example: **WS-W98526-40-BK**

For custom requests please contact customs@modernforms.com