

Sensor-switched LED indoor light

RS 200 SC

with motion detector & Bluetooth
EAN 4007841 078782
Article number 078782



LED

long life LED
25.000 h



indoor light

3000 K

3000K warm-white



high frequency
sensor 360°



mounting height
max. 4 m



max. Ø 8 m



2 - 2000 lux



IP54



5 sec - 60 min (via
App)



soft light start

Function description

The RS 200 is the first Connect LED indoor luminaire in our indoor range. for ceilings and walls. This means that it can be conveniently set up, networked and operated via Bluetooth, networked and operated via Bluetooth. Without cables. Without stress. The luminaire comes in a high-quality, anthracite-coloured aluminium housing and, in addition to the 360° high-frequency sensor and an intelligent soft light start. This automatically creates an all-round beautiful room atmosphere, which is rounded off by an ambient light on the wall.

Technical specifications

With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Smartphone, Tablet, App, Connect Bluetooth Mesh
Version	with motion detector & Bluetooth
PU1, EAN	4007841078782
Application, place	Indoors
Application, room	stairwell, Indoors, function room / ancillary room, corridor / aisle, recreation room
Colour	Anthracite
Installation site	ceiling
Installation	Ceiling, Wall
Impact resistance	IK10
IP-rating	IP54
Protection class	I

Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Transmitter power	< 1 mW
Luminous flux total product	1165 lm
Total product efficiency	68 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
Functions	Motions sensor, DIM function, Light sensor, Orientation light
Twilight setting	2 – 2000 lx
Time setting	5 s – 30 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light

<https://www.steinell.de>

Subject to technical modifications

09.2022 Page 1 from 3

Sensor-switched LED indoor light

RS 200 SC

with motion detector & Bluetooth
EAN 4007841 078782
Article number 078782



Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	4,00 m
HF-system	5,8 GHz
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Electronic scalability	Yes

Basic light level function time	1-60 min
Main light adjustable	50 - 100 %
Interconnection	Yes
Type of interconnection	Master/master
Interconnection via	Bluetooth Mesh Connect
Basic light level function in per cent	10 – 100 %

Sensor-switched LED indoor light

RS 200 SC


with motion detector & Bluetooth

EAN 4007841 078782

Article number 078782




Detection Zone

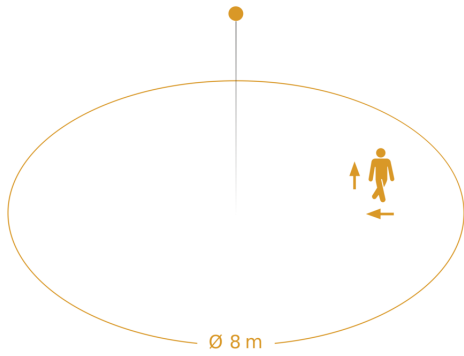

Mögliche Montagehöhe: -
Orange: radial und tangential

Dimension Drawing

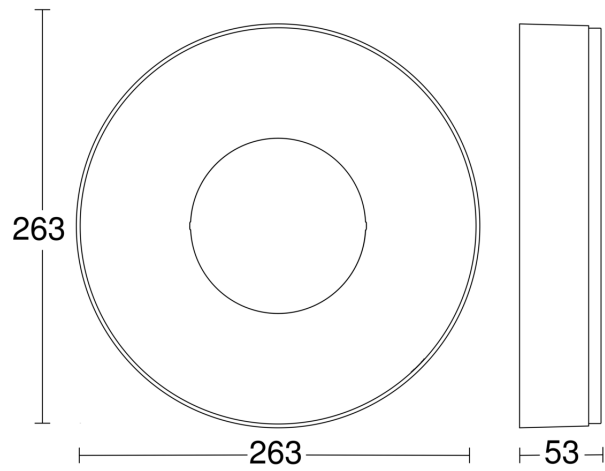

Slave/wireless master interconnection circuit diagram

