


1 Remove the bottom plate

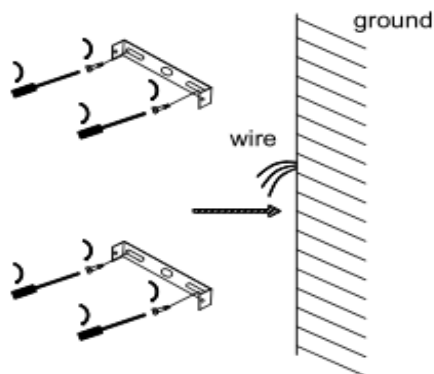


2 Fix the bottom plate to the wall


Power cable
(1).the yellow
representative
ground wire

(2).the brown
representative
(L) fire wire

(3).the blue
representative
(N) zero wire

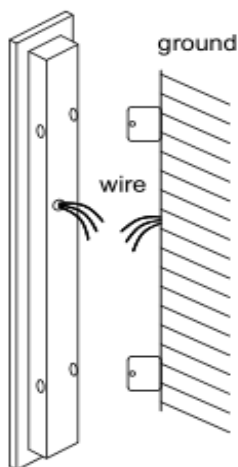

3 Connect the power cord

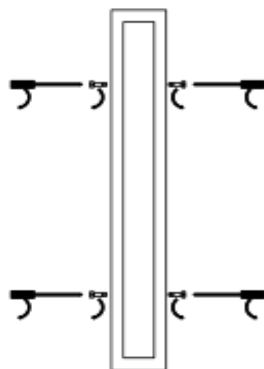

4 Fix the lamp body on the bottom plate

Before installing the light, please make sure the power is off

1. Remove the small screws on both sides of the lamp, and separate the bottom plate and the lamp body
2. Install and reset the bottom plate on the wall

3. Connect the fire line, zero line and ground wire of the lamp body to the wire in the existing wall box, and must be use the wiring cap or connect tape when the wire is connected.
4. Install the lamp body on the bottom plate, and then install the lamp with screws