

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Quill

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59403R 16" - 3 Lights	2 700K/3000K/3500K/4000K 90	24 W	1558	AB Aged Brass BK Black CH Chrome

Example: **PD-59403R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




FINISHES:



Aged Brass Black Chrome

LINE DRAWING:

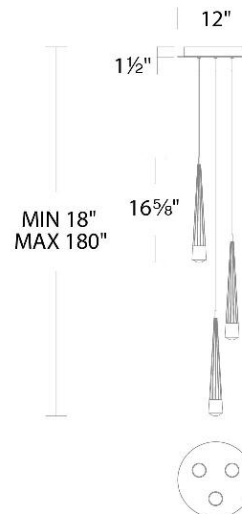

PD-59403R

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Quill

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59405R 16" - 5 Lights	2 700K/3000K/3500K/4000K 90	40 W	2597	AB Aged Brass BK Black CH Chrome

Example: **PD-59405R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




FINISHES:



Aged Brass Black Chrome

LINE DRAWING:

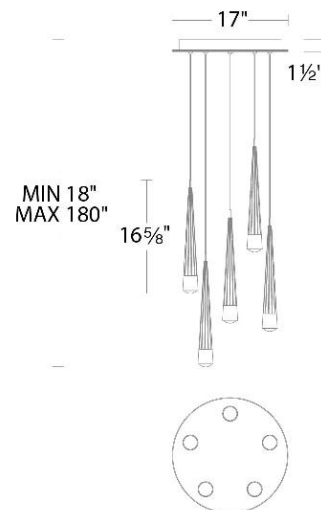

PD-59405R

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Quill

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59409R 16" - 9 Lights	2 700K/3000K/3500K/4000K 90	72 W	4674	AB Aged Brass BK Black CH Chrome

Example: **PD-59409R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body



FINISHES:




Aged Brass

Black

Chrome

LINE DRAWING:

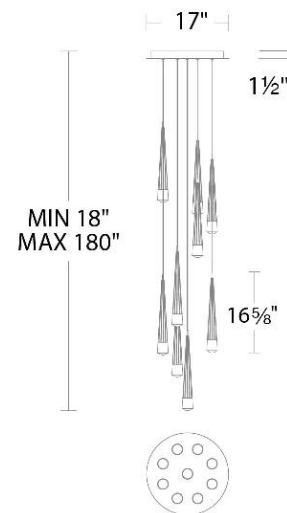

PD-59409R

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Quill

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59415R 16" - 15 Lights	2 700K/3000K/3500K/4000K 90	120 W	7790	AB Aged Brass BK Black CH Chrome

Example: **PD-59415R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




FINISHES:



Aged Brass Black Chrome

LINE DRAWING:

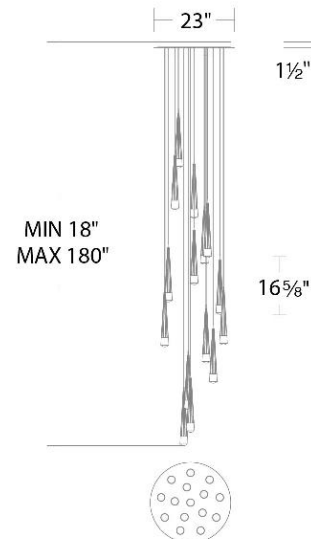

PD-59415R

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Quill

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59421R 16" - 21 Lights	2 700K/3000K/3500K/4000K 90	168 W	10905	AB Aged Brass BK Black CH Chrome

Example: **PD-59421R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 21 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




FINISHES:



Aged Brass Black Chrome

LINE DRAWING:

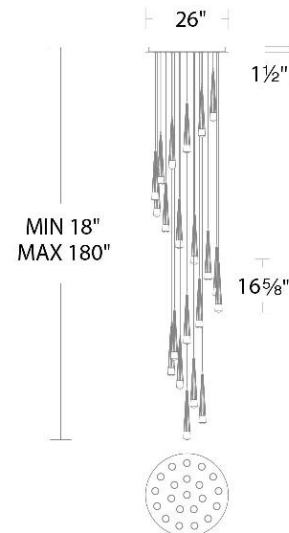

PD-59421R