

Instructions


⚠ WARNING

- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Feed the wire from the hub cover through the poles (S), tube (P), joint (O), and canopy.
2. Connect the poles to each other, screwing them into place.
3. Connect the hub cover and tube to the pole assembly, screwing them into place.
4. Connect the tube to the joint, screwing it into place.
5. Make electrical connections using the wire nuts (A).
6. Being careful that no wiring is left exposed, place the canopy against the mounting bracket and secure it by replacing the canopy nuts onto the canopy bolts.
7. Prepare the wiring and a junction box (not included) in your ceiling for the desired location of your new lamp.
8. Unscrew the canopy nuts (N) from the canopy bolts (M).
9. Take the mounting bracket (B) off the canopy (C).
10. Connect the mounting bracket to your junction box using the mounting bolts (L). If necessary, use the plastic anchors (J) and mounting screws (K) for more suitable and secure fixation.
11. Complete the above installation process, twist in the E26 bulb, and turn on the power switch

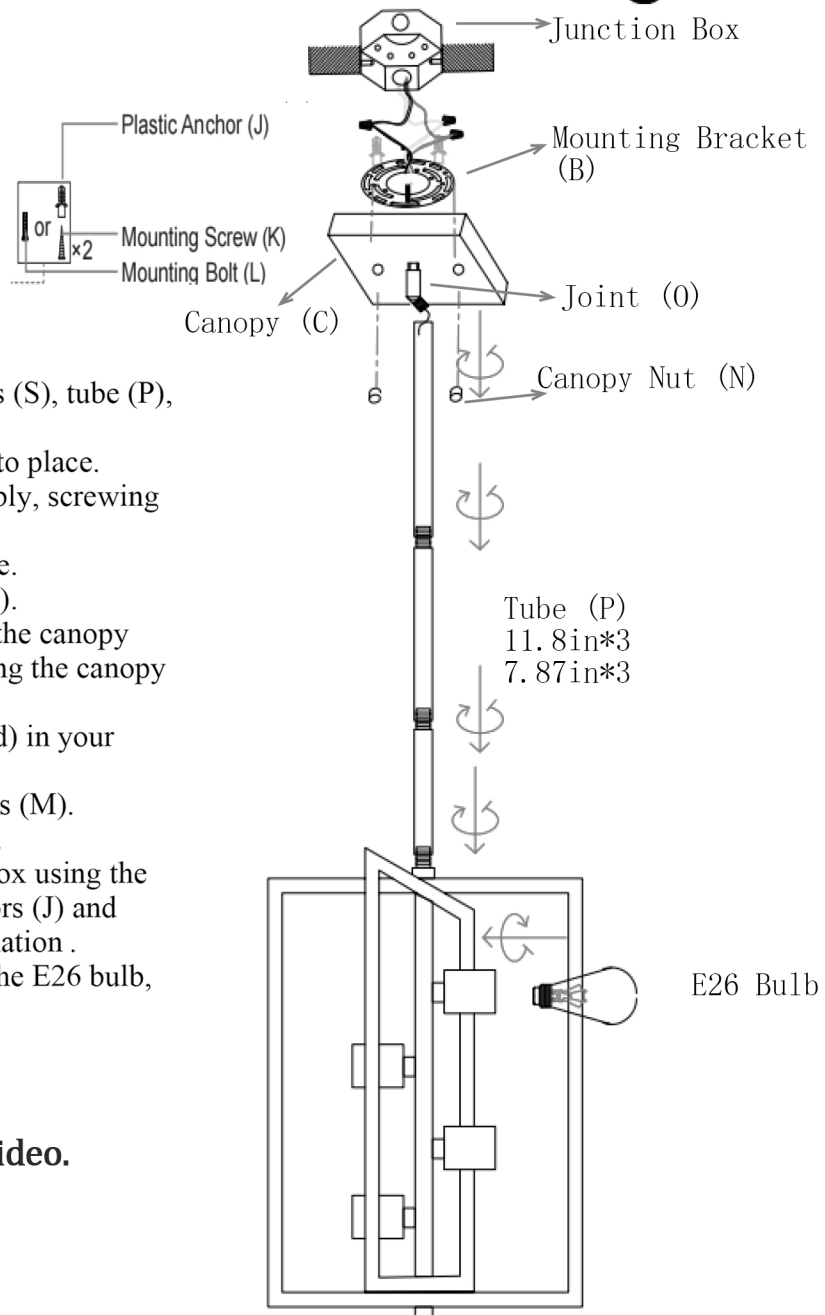

Just Scan the Below Code for Installation Video.



274B

d1		x 3
d2		x 2

4 x E26 Socket
Max.60W Bulbs
(not included)