


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

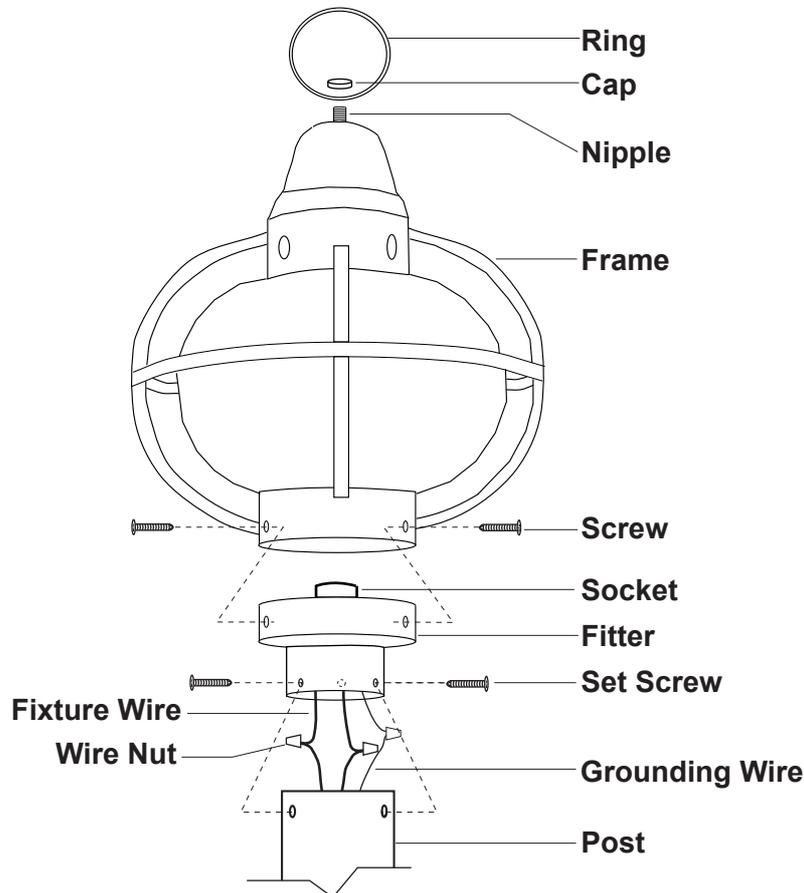

1. Unscrew the screws to remove the frame away from the fitter.
2. Pull out the wires and grounding wire from the post. Make wire connections using the wire nuts:
 - The black wire from the fixture to the black wire from the post.
 - The white wire from the fixture to the white wire from the post.
 - The grounding wire from the fixture to the grounding wire from the post.Carefully put the wires back into the post.
3. Place the fitter on the top of the post, and then secure it with set screws.
CAUTION: With silicone caulking compound, caulk completely around where the fitter meets with the post surface to prevent water from seeping into the outlet box.
4. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
5. Restore the frame back to the fitter, then secure it with screws.
6. Attach the ring onto the top of the frame by inserting the nipple, then secure it with the cap.
7. Turn on the power at the main fuse or circuit breaker box.