



















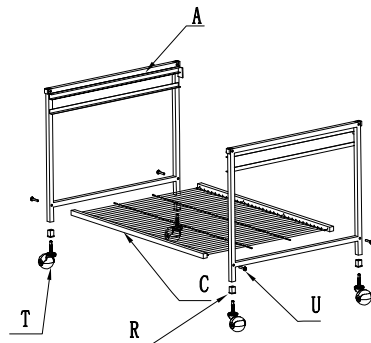



Assembly Instructions

		 C (Wire Stand Grill): 1 pc			 G (Top Stand): 1 pc		 J (Side Frame): 2 pcs	 K (Front and Back Seed-Guard): 2 pcs	 M (Swing set): 1 pc	 N (Toy Hook): 1 pc	 O (Metal Tray): 1 pc
A (Left and Right Leg Stand): 2 pcs	B (Bottom Bar): 2 pcs	D (Wire Sliding Grill): 1 pc	E (Long Ladder): 2 pcs	F (Short Ladder): 2 pcs	H (Top perch): 1 pc	I (Top Bar): 2 pcs		L (Left and Right Seed-Guard): 2 pcs			


 P (Stainless Steel Cup): 2 pcs	 R (Plastic Insert): 4 pcs	 U (1 1/4" Screw): 14 pcs
 Q (Sunk Screw): 2 pcs	 S (5/16" Hex Head screw): 22 pcs	 V (Nut): 8 pcs
	 T (Rolling Caster): 4 pcs	 W (Allen Wrench): 1 pc




- Step 1:**
- (1) Assemble part A and C, secure with 1-1/4" screws;
 - (2) Put 4 Plastic Inserts and 4 Rolling Casters into each of the 4 legs as shown.

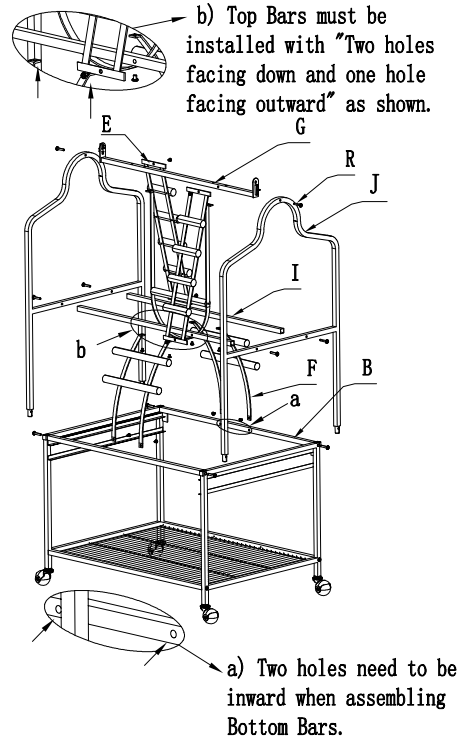

- Step 2:**
- (1) Insert part J into holes provided in A, and connect with part B, G and I, then secure with 1-1/4" screws. Note the (a) and (b) above.
 - (2) Assemble part E, F and M, and secure with 5/16" screws.

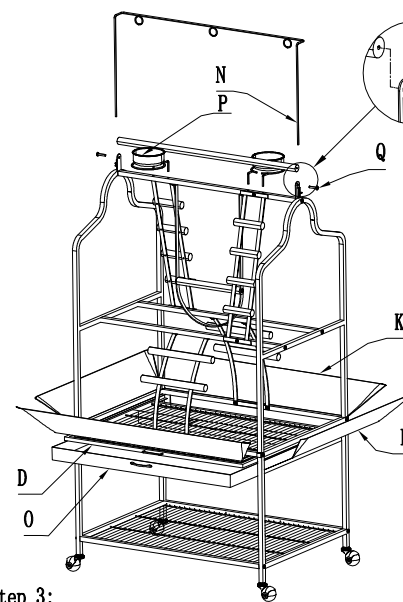

- Step 3:**
- (1) Assemble 4 seed-guards, and secure with S and V as shown.
 - (2) Insert part N, and secure with the butterfly screws provided in part G.
 - (3) Insert 2 Cup Holders, 2 Cups into position as shown.
 - (4) Assemble Top Perch with Sunk Screw as shown. Note: if you want to replace the Top Perch from part G sometime, then just release the sunk screws for replacement.
 - (5) Slide in the Wire Grill and Metal Tray as shown.

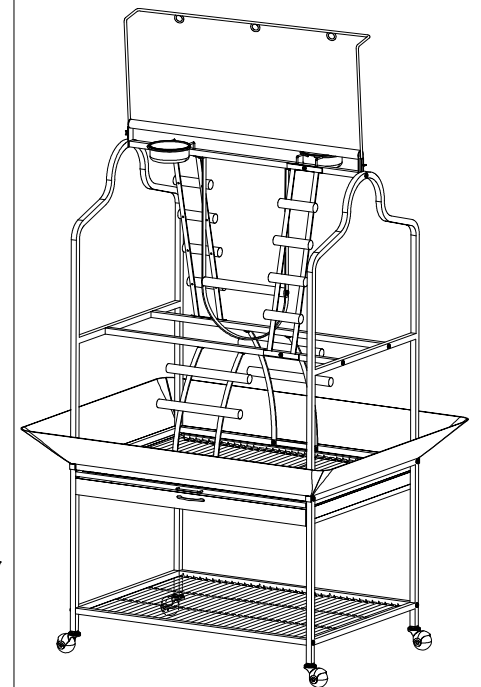

- Step 4:**
- Assembly finished.

Now, your new stand is ready for use.