








ASSEMBLY INSTRUCTION





Rocking Chair

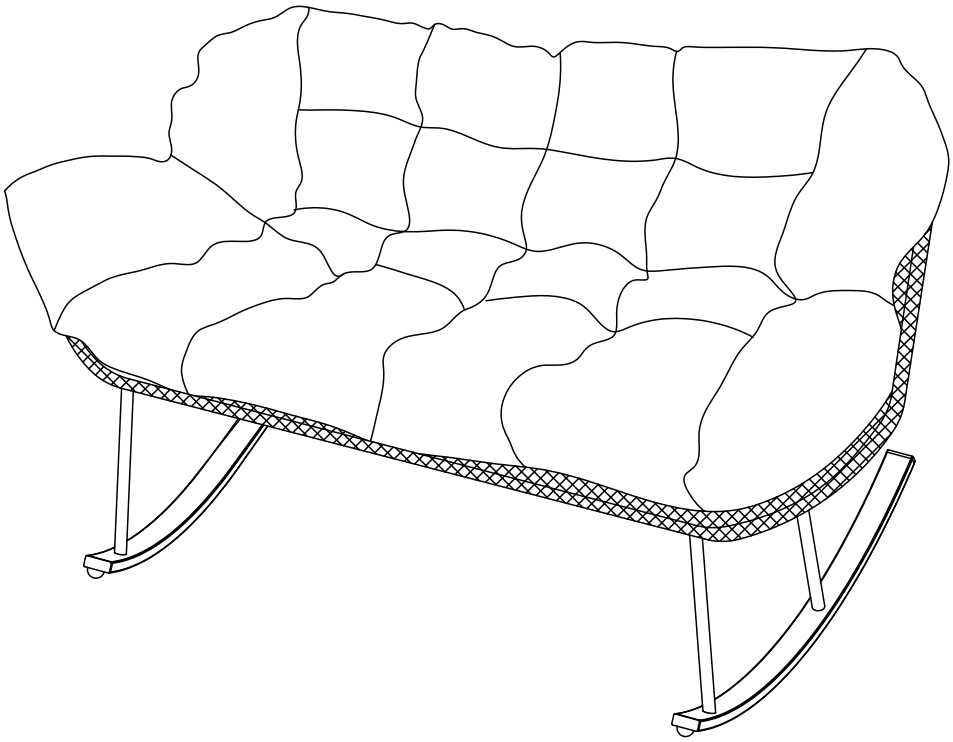

Parts List

LABEL		DESCRIPTION	QTY
A		Chair Base	1
B		Chair Back	1
C		Chair Left Armrest	1
D		Chair Right Armrest	1
E		Right Leg	1
F		Left Leg	1
G		Leg Support Rod	1
H		Cushion	1

Hardware List


LABEL		DESCRIPTION	QTY
#1		Bolts M6 x 15 mm	+1 Spare 12
#2		Bolts M6 x 35 mm	+1 Spare 3
#3		Bolts M6 x 50 mm	+1 Spare 4
#4		Flat Washer M6	+2 Spare 23
#5		Nut M6*10 mm	+1 Spare 4
#6		Allen Wrench M6	1
#7		Wrench 10*10	1

ATTENTION:

DO NOT tighten screws completely until assembly is completed;


1

#2 ×3PCS	#4 ×3PCS	70%
 M6 ×35mm	 M6	#6

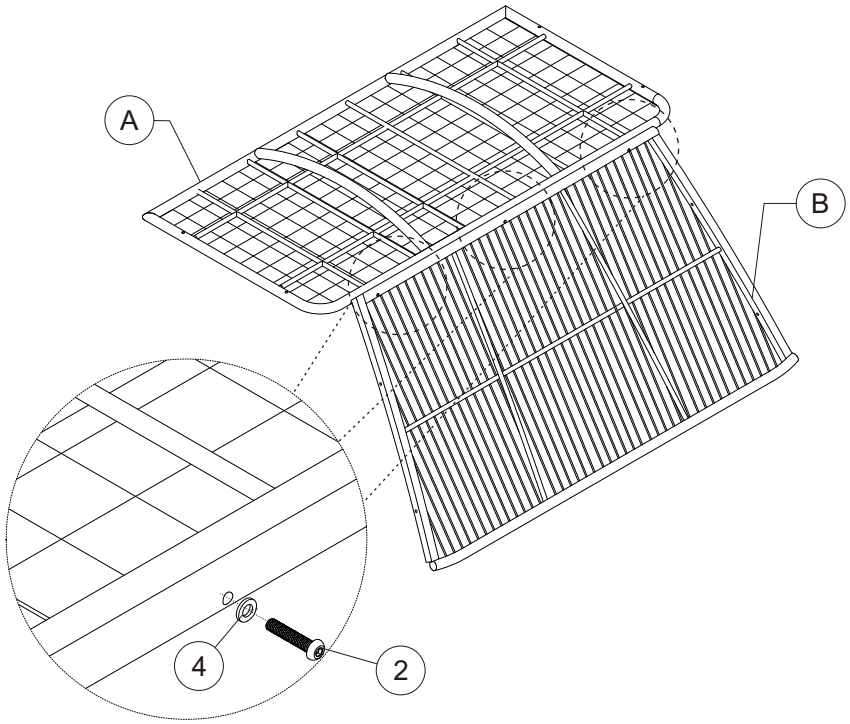


2

#3 ×2PCS	#4 ×4PCS	#5 ×2PCS	70%
 M6X50mm	 M6		#6&7

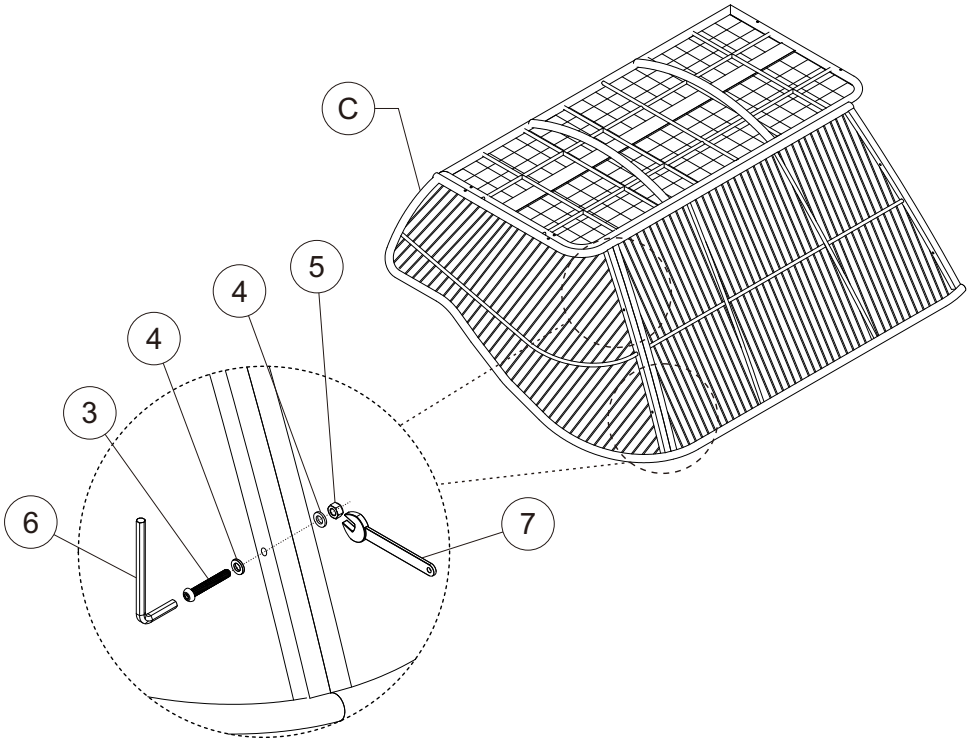


3

#3 ×2PCS	#4 ×4PCS	#5 ×2PCS	70%
M6X50mm	M6		#6&7

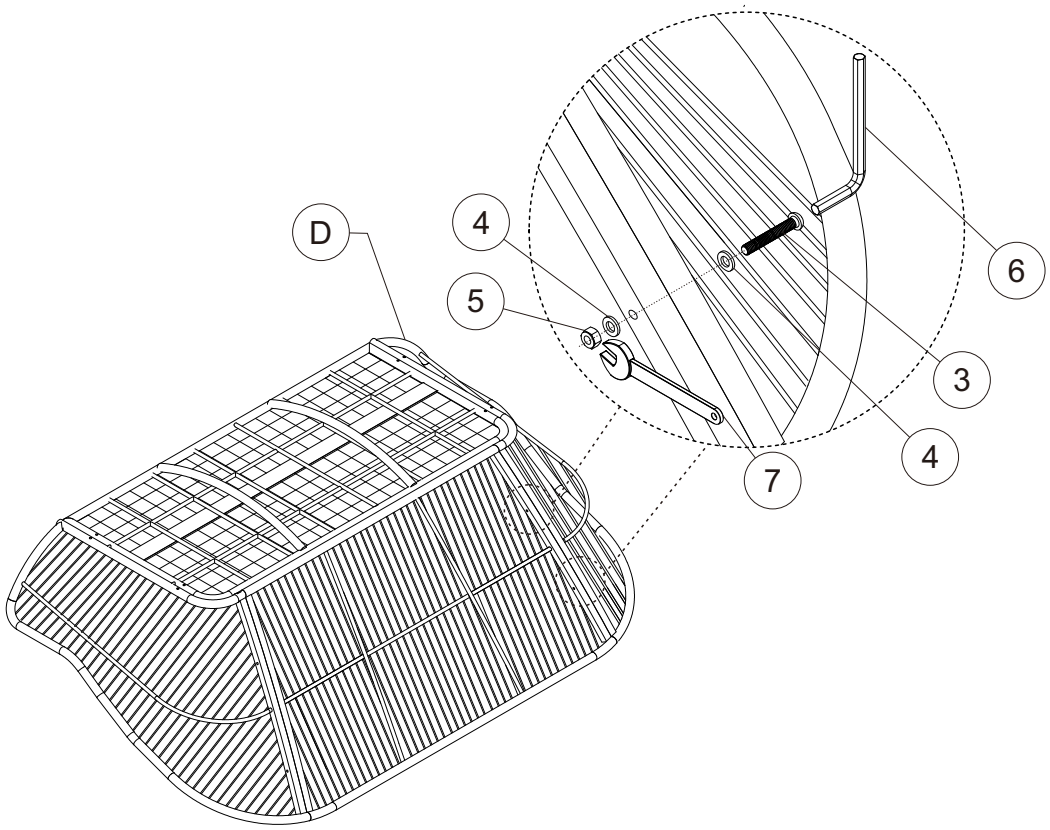

4


#1×8PCS	#4 ×8PCS	70%
M6*15mm	M6	#6

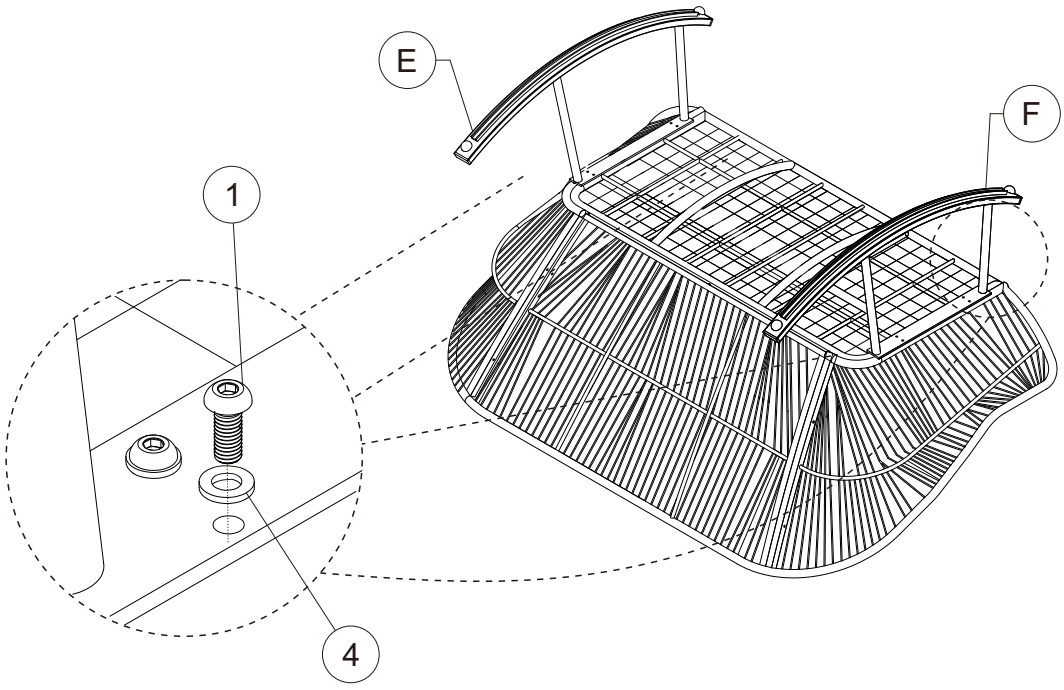



Note: Please make sure the rocker legs are installed in the correct direction. The longer end should face the backrest side, and the shorter end should face the front of the chair.

5


#1×4PCS	#4 ×4PCS
	
M6*15mm	M6






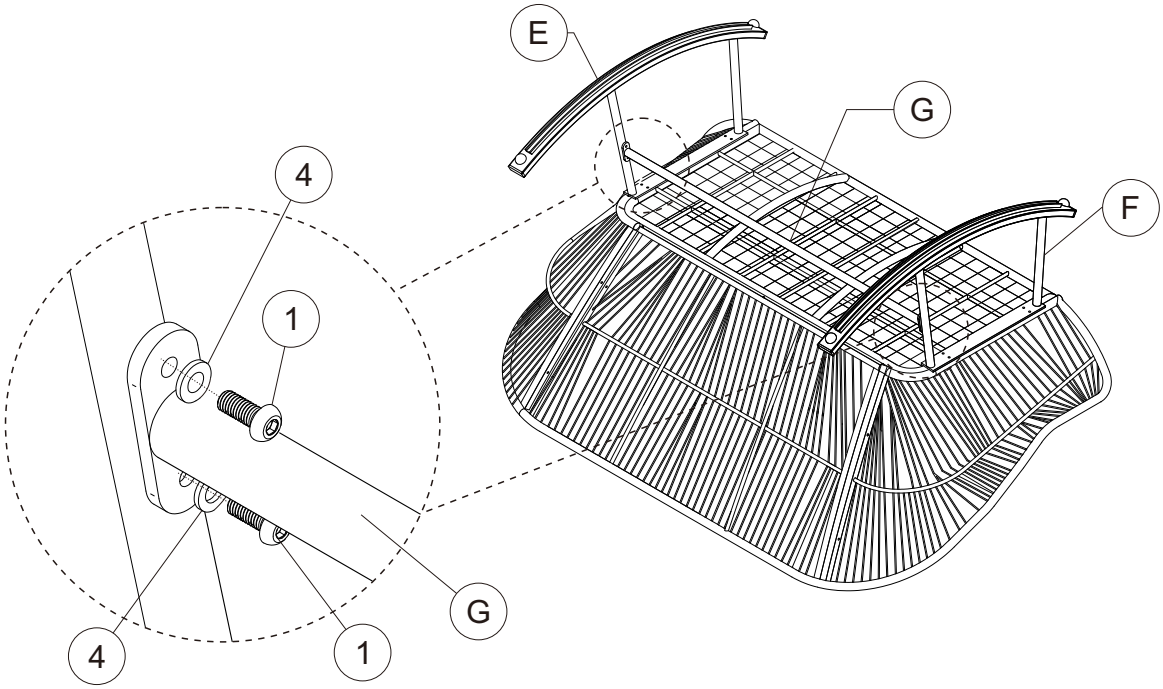

6






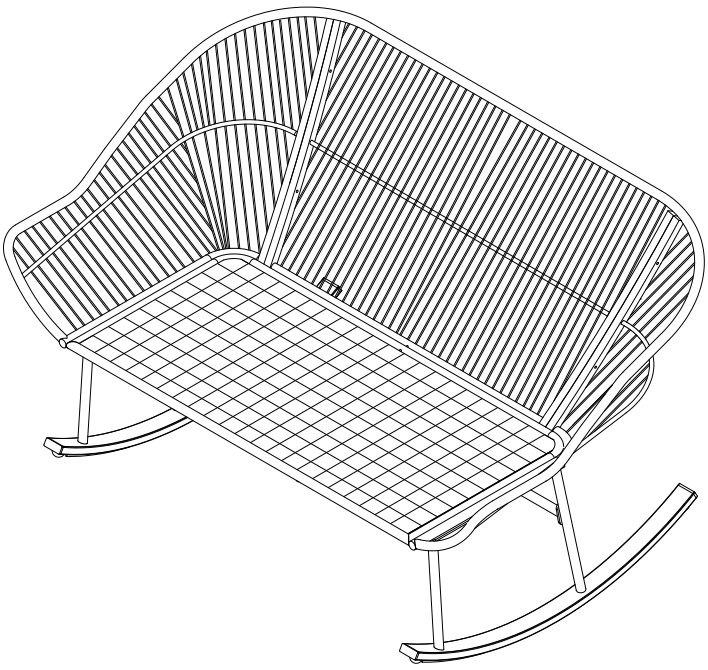

After assembly, fully tighten all screws.

7

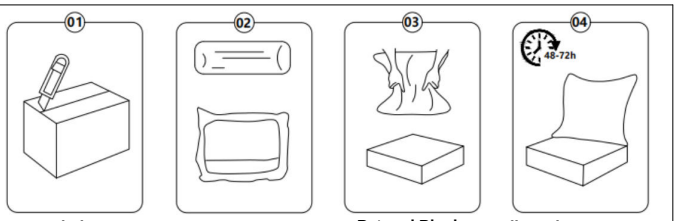


Unpack the Box
Carefully remove the cushion bag from the box.

Open the Vacuum Bag
Release the cushion from the vacuum bag.

Pat and Pinch
Gently pat and pinch the cushion to restore shape.

Allow Time to Restore
It takes about 48-72 hours to regain fullness.

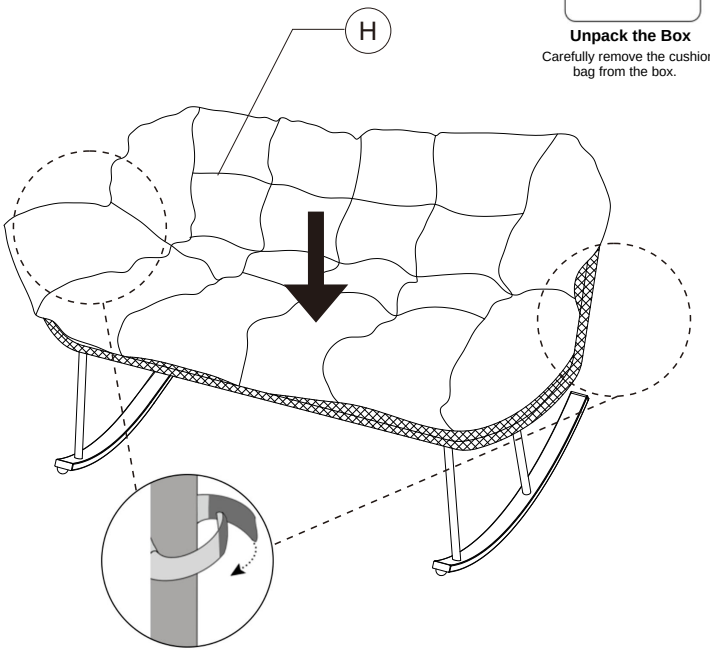

Fluff the cushion by patting it, then attach it to the chair using the hook-and-loop fasteners.
Note: The hook-and-loop fasteners must be secured to the metal frame.
Do not attach them to the wicker.

8

