

FEATURES & SPECIFICATIONS

INTENDED USE — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (2-3/8") also makes it an excellent choice for renovation projects.

CONSTRUCTION — BLT enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability.

LED boards and drivers are accessible from the plenum.

OPTICS — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces — rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with linear prisms or a smooth frosted finish.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000).

Non-Configurable BLT: Generic 0-10 volt dimming driver. Dims to 10%

Configurable BLT: available in High Efficiency (HE) versions for applications where a lower wattage (over the standard product) is required. The High Efficiency versions deliver >130 LPW and can be specified via the Lumen Package designations in the Ordering Information below.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Optional integrated nLight® controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. It can be accomplished with integrated nLight AIR wireless or through standard Cat-5 cabling. nLight offers unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission, while nLight AIR is commissioned easily through an intuitive mobile app.

Lumen Management: Unique lumen management system (option N80) provides on board intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

Driver disconnect provided where required to comply with US and Canadian codes.

SENSOR — Integrated sensor (individual control): Sensor Switch MSD7ADCX ((Passive infrared (PIR)) or MSDPDT7ADCX ((PIR/Microphonics Dual Tech (PDT)) integrated occupancy sensor/automatic dimming photocell allows the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 4 for the nLight sensor options.

Integrated Smart Sensor (nLight Air Wireless Platform): The rES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is both a digital PIR occupancy sensor/automatic dimming photocell. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY, which allows for simple sensor adjustment. See page 4 for more details on the Integrated Smart Sensor.

INSTALLATION — The BLT's low profile design of only 2-3/8" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

BLT Series LED

2BLT

2' x 4'
LED



eldoLED




Specifications

Length: 47-3/4 (121.2)

Width: 23-3/4 (60.3)


Depth: 2-3/8 (6.0)

Depth with Air supply/return: 2-3/4 (6.9)



All dimensions are inches (centimeters) unless otherwise specified.

Multiple Diffuser Options

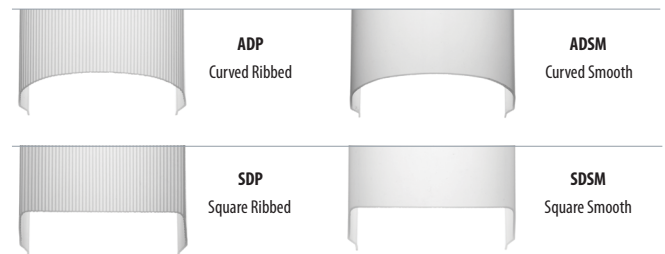

CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

2BLT Volumetric Recessed Lighting 2'x4'



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2BLT4 40L ADP EZ1 LP840

2BLT4							
Series	Air function	Lumens ²		Diffuser	Voltage	Driver	Color temperature
2BLT4 2x4 BLT	(blank) Static A Air supply/return ¹	Standard efficiency (>100 LPW)	High efficiency^{3,4} (>130 LPW)	ADP Curved, linear prisms ADSM Curved, smooth SDP Square, linear prisms SDSM Square, smooth Includes trim rings to match sensed version ADPT Curved, linear prisms ADSMT Curved, smooth SDPT Square, linear prisms SDSMT Square, smooth	(blank) MVOLT 120 120V 277 277V 347 347V ⁵	EZ1 eldoLED dims to 1% (0-10 volt dimming) SLD Step-level dimming ⁶ LE1 Lutron Ecosystem driver dims to 1% ^{6,7}	LP830 82CRI, 3000 K LP835 82CRI, 3500 K LP840 82CRI, 4000 K LP850 82CRI, 5000 K LP930 90CRI, 3000K LP935 90CRI, 3500K LP940 90CRI, 4000K LP950 90CRI, 5000K
		30L 3000	40LHE 4000				
		40L 4000	48LHE 4800				
		48L 4800	60LHE 6000				
		60L 6000	72LHE 7200				
		72L 7200	85LHE 8500				

Controls		Occupancy control ¹⁰		Options	
(blank) No nLight®		(blank) No sensor control		EL7L 700 lumen battery pack ¹³	
N80 nLight® with 80% lumen management		nLight Wired Networking	Individual Control	EL14L 1400 lumen battery pack ¹³	
N80EMG nLight® with 80% lumen management For use with generator supply EM power ⁸		NES7 nLight™ nES 7 PIR integral occupancy sensor ¹¹	MSD7ADCX PIR integral occupancy sensor with automatic dimming control photocell ^{6,12}	EL14LSD 1400 lumen battery pack with self-diagnostic testing feature ^{13,14}	
N100 nLight® without lumen management		NESPD7 nLight™ nES PDT 7 dual technology integral occupancy control ¹¹	MSDPDT7ADCX PDT integral occupancy sensor with automatic dimming control photocell ^{6,12}	CP Chicago plenum ¹⁵	
N100EMG nLight® without lumen management For use with generator supply EM power ⁸		NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell ¹¹	nLight Wireless Zone	BGTD Bodine Generator Transfer Device ¹⁶	
NLTAIR nLight AIR enabled ⁹		NESPD7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell ¹¹	RES7Z nLight AIR PIR integral occupancy sensor with automatic dimming photocell for zone control	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit	
		nLight Wireless Networking		PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit	
		RES7N nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities		PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray ¹⁷	
				PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires ¹⁷	
				GLR Fast-blowing fuse ¹⁸	
				GMF Slow-blowing fuse ¹⁸	
				NPLT Narrow pallet	
				RRL_ RELOC®-ready luminaire ¹⁹	
				LATC Earthquake clip	
				DWAM Anti-Microbial paint	
				JP16 Job packaging	
				IP5X Gasketed diffuser compartment to meet IP5X rating ²⁰	

Accessories next page

Notes

- Air supply/return option only available with ADPT, ADSMT, SDPT, and SDSMT diffuser options.
- Approximate lumen output.
- All versions may not achieve 130+ LPW. Refer to photometry on www.acuitybrands.com.
- Air supply/return option, 90 CRI, and versions with integral sensor trim rings may not achieve 130 LPW.
- Not available with SLD EL7L, or EL14L options.
- Not available with N80, N80EMG, N100, N100EMG, NLTAIR, or occupancy control.

- Not available with controls, occupancy controls, or PWS options. Consult factory for Hi-Lume dimming.
- nLight EMG option requires a connection to existing nLight network. Power is provided from a separate N80 or N100 enabled fixture.
- Must order with RES7N or RES7Z sensor. Only available with EZ1 driver. Not available with 72L, 72LHE, or 85LHE options.
- Must specify diffuser with trim rings. See sensor options on page 4.
- Requires N80, N80EMG, N100, or N100EMG.
- Only available with EZ1 driver option. 0-10v dimming wires not accessible via access plate.
- When using pre-wire option, use PWS1846 or PWS1846 PWSLV.

- For more information, please see the [PSSD2 specification sheet](#).
- Not available with N80, N80EMG, N100, or N100EMG.
- Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options.
- Not available with nLight wired/wireless network or individual controls.
- Must specify voltage, 120 or 277, with GLR and GFM fusing.
- For ordering logic consult [RRL_2013](#).
- Not available with air supply/return or Wired Networking (NES_) and Individual Control (MSD_) sensors.

2BLT Volumetric Recessed Lighting 2'x4'

Non-Configurable BLT								
Stock/MTO	Catalog Description *	UPC	Lumens	Wattage	LPW	Color Temperature	Voltage	Pallet Qty
Stock	2BLT4 40L ADP LP835	00190887470789	3945	34	116	3500K/82 CRI	120-277	26
	2BLT4 40L ADP LP840	00190887470765	4032	34	118	4000K/82CRI	120-277	26
	2BLT4 46L ADP LP835	00190887468656	4520	38.34	118	3500K/82 CRI	120-277	26
	2BLT4 46L ADP LP840	00190887468649	4620	38.34	120	4000K/82CRI	120-277	26
	2BLT4 40L ADP EL 14L LP835	00190887470925	3945	34	116	3500K/82 CRI	120-277	26
	2BLT4 40L ADP EL 14L LP840	00190887470918	4032	34	118	4000K/82 CRI	120-277	26
	2BLT4 46L ADP EL 14L LP835	00190887468670	4520	38.34	118	3500K/82 CRI	120-277	26
	2BLT4 46L ADP EL 14L LP840	00190887468663	4620	38.34	120	4000K/82 CRI	120-277	26
MTO	2BLT4 40L ADP 347 LP835		3945	34	116	3500K/82 CRI	347	26
	2BLT4 40L ADP 347 LP840		4032	34	118	4000K/82CRI	347	26
	2BLT4 46L ADP 347 LP835		4520	38.34	118	3500K/82 CRI	347	26
	2BLT4 46L ADP 347 LP840		4620	38.34	120	4000K/82CRI	347	26

*Generic 0-10V Dimming to 10%.

Accessories: Order as separate catalog number.	
DGA24	Drywall grid adapter for 2x4 recessed fixture

nLight® Wired Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight .			
WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODM [color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODM DX [color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD GFX [color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CAT5 10FT J1
		30' cable	CAT5 30FT J1

nLight® AIR Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair .	
Wall switches	Model number
On/Off single pole	rPODB [color]
On/Off two pole	rPODB 2P [color]
On/Off & raise/lower single pole	rPODB DX [color]
On/Off & raise/lower two pole	rPODB 2P DX [color]
On/Off & raise/lower single pole	rPODBZ DX WH ¹

Notes

1 Can only be ordered with the RES7Z zone control sensor version.

Replacement Parts: Order as separate catalog number.		
*249P2N	2DBLT48 ADP LENS ASSEMBLY	4 ft. replacement lens
*249P2T	2DBLT48 SDP LENS ASSEMBLY	4 ft. replacement lens
*249P30	2DBLT48 ADSM LENS ASSEMBLY	4 ft. replacement lens
*249P33	2DBLT48 SDSM LENS ASSEMBLY	4 ft. replacement lens
*237LT2	2DBLT48 ADPT LENS ASSEMBLY	4 ft. replacement lens
*237LT4	2DBLT48 SDPT LENS ASSEMBLY	4 ft. replacement lens
*237LT6	2DBLT48 ADSMT LENS ASSEMBLY	4 ft. replacement lens
*237LT8	2DBLT48 SDSMT LENS ASSEMBLY	4 ft. replacement lens
*237LTA	2DBLT48 ADPT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M52	2DBLT48 SDPT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M5A	2DBLT48 ADSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens
*237M5L	2DBLT48 SDSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens


2BLT Volumetric Recessed Lighting 2'x4'

Option	Automatic Dimming Photocell	Sensor Options		nLight Wired Networking	nLight AIR Networking	nLight AIR Zone
		Occupancy Sensing				
		PIR	PDT			
MSD7ADCX	X	X				
MSDPDT7ADCX	X		X			
NES7		X		X		
NES7ADCX	X	X		X		
NESPD7			X	X		
NESPD7ADCX	X		X	X		
RES7N	X	X			X	
RES7Z	X	X				X

Integrated Sensor with Individual Control

The MSD7ADCX PIR occupancy sensor/automatic dimming photocell is ideal for areas without obstructions and where daylight harvesting may be desired. Suggested applications include, but not limited to, hallways, corridors, storage rooms, and breakrooms or other areas where people are typically moving.


The MSDPDT7ADCX PIR/Microphonics Dual Tech occupancy sensor/automatic dimming photocell is ideal for areas with obstructions and where daylight harvesting is desired. Suggested applications include, but not limited to, open offices, private offices, classrooms, public restrooms, and conference rooms.

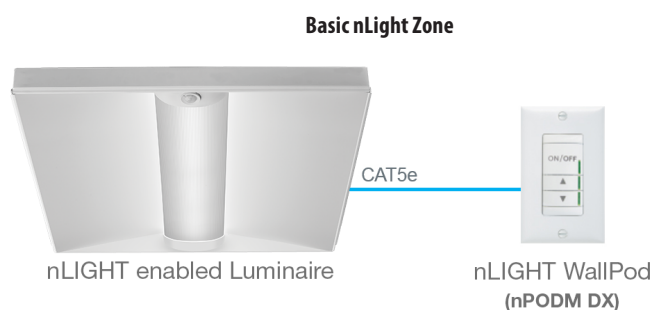


nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.

For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPD7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

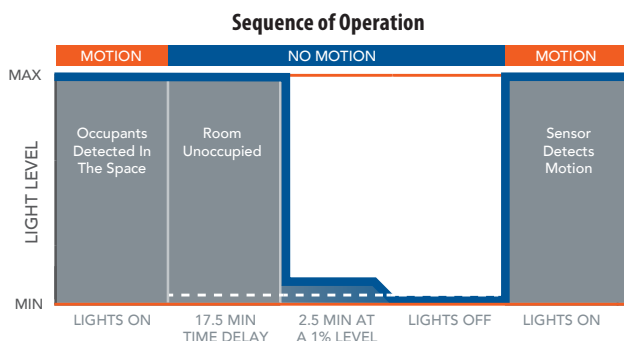



*The presetting on the automatic dimming photocell is 5fc.

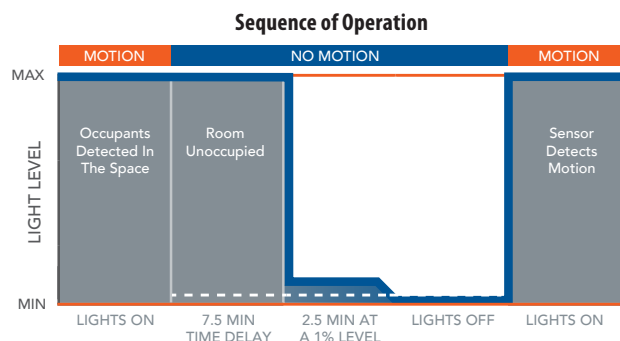

*The presetting on the automatic dimming photocell is 5fc.

Sensor Coverage Pattern Mini 360° Lens


- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and
- 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

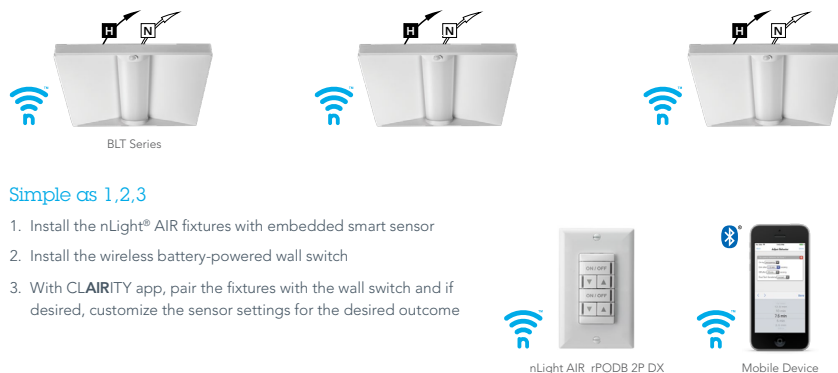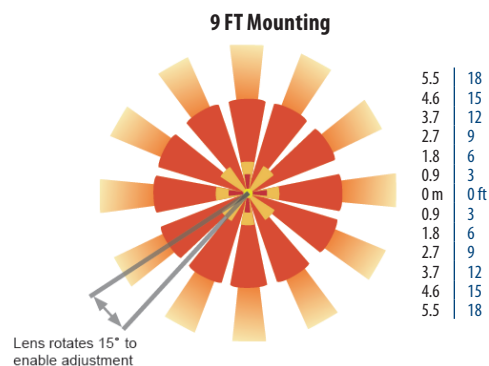


2BLT Volumetric Recessed Lighting 2'x4'

PHOTOMETRICS

2BLT4 40L ADP LP835, 3945 delivered lumens, test no. LTL28918P37, tested in accordance to IESNA LM-79


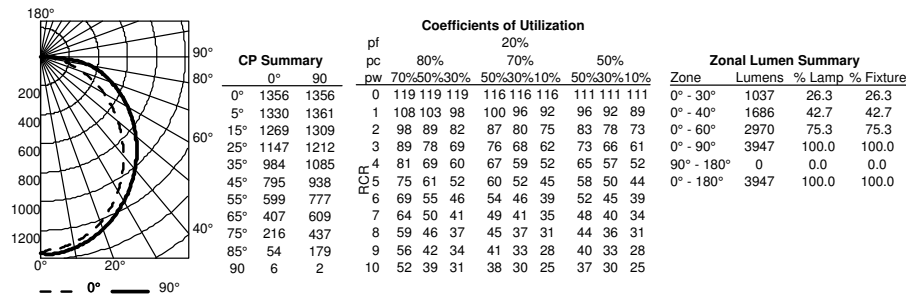


2BLT4 48L ADP LP835, 5121 delivered lumens, test no. LTL28918P41, tested in accordance to IESNA LM-79

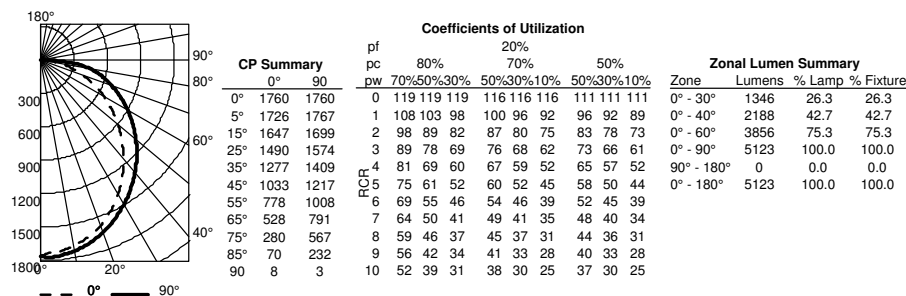

Constant Lumen Management


Enabled by the embedded nLight control, the BLT actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.



Performance Data			
Lumen Package	Lumens	Input Watts	LPW
30L ADP LP830	3286	30	110
30L ADP LP835	3371	30	113
30L ADP LP840	3445	30	115
30L ADP LP850	3614	30	121
40L ADP LP830	3846	34	113
40L ADP LP835	3945	34	116
40L ADP LP840	4032	34	118
40L ADP LP850	4230	34	124
48L ADP LP830	4993	45	111
48L ADP LP835	5121	45	114
48L ADP LP840	5234	45	116
48L ADP LP850	5492	45	122
60L ADP LP830	6014	53	114
60L ADP LP835	6169	53	117
60L ADP LP840	6305	53	119
60L ADP LP850	6615	53	125
72L ADP LP830	7388	67	110
72L ADP LP835	7579	67	113
72L ADP LP840	7746	67	115
72L ADP LP850	8127	67	121
AIR 30L ADP LP830	3075	30	103
AIR 30L ADP LP835	3138	30	105
AIR 30L ADP LP840	3223	30	108
AIR 30L ADP LP850	3250	30	108
AIR 40L ADP LP830	3599	34	105
AIR 40L ADP LP835	3673	34	108
AIR 40L ADP LP840	3772	34	110
AIR 40L ADP LP850	3804	34	111
AIR 48L ADP LP830	4672	45	104
AIR 48L ADP LP835	4897	45	109
AIR 48L ADP LP840	4897	45	109
AIR 48L ADP LP850	4939	45	110
AIR 60L ADP LP830	5628	53	106
AIR 60L ADP LP835	5743	53	108
AIR 60L ADP LP840	5899	53	111
AIR 60L ADP LP850	5949	53	112
AIR 72L ADP LP830	6914	67	103
AIR 72L ADP LP835	7055	67	105
AIR 72L ADP LP840	7247	67	108
AIR 72L ADP LP850	7309	67	109

HE Performance Data			
Lumen Package	Lumens	Input Watts	LPW
48LHE ADP LP830	4655	36	127
48LHE ADP LP835	4775	36	130
48LHE ADP LP840	4880	36	133
48LHE ADP LP850	5121	36	139
60LHE ADP LP830	5473	42	129
60LHE ADP LP835	5614	42	132
60LHE ADP LP840	5738	42	135
60LHE ADP LP850	6020	42	142
72LHE ADP LP830	6805	52	130
72LHE ADP LP835	6981	52	133
72LHE ADP LP840	7135	52	136
72LHE ADP LP850	7486	52	143
85LHE ADP LP830	8189	64	127
85LHE ADP LP835	8400	64	131
85LHE ADP LP840	8585	64	134
85LHE ADP LP850	9008	64	140

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1' and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*



*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 24-3/4" x 48-3/4" (Tolerance is +1/8", -0").