


ME by Starck One-Piece toilet Duravit Rimless® # 217301..01 / 217301..85 / 217301..01 / 217301..85

|< 14 1/8" Inch >|



One-Piece toilet Duravit Rimless®	Dimension	Weight	Order number
rimless, syphonic, 12" rough-in, suitable for SensoWash Starck vertical outlet, cUPC® listed*	ζ,		
Colors			
00 White 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness)			
Variant			
ullet 1.32/0.92 gpf, with dual flush piston valve, top flush, ADA height	14 1/8" x 28 3/4" Inch	141 lb	21730101
♦ 1.28 gpf, with single flush piston valve, top flush	14 1/8" x 28 3/4" Inch	141 lb	21730185
ullet 1.32/0.92 gpf, with dual flush piston valve, top flush, ADA height	14 1/8" x 28 3/4" Inch	141 lb	21730101
♦ 1.28 gpf, with single flush piston valve, top flush	14 1/8" x 28 3/4" Inch	141 lb	21730185
Infobox			
For suitable SensoWash® shower-toilet seats, please see matr ASME A112.19.2/CSA B45.1	rix on page xxx, * Complies	s with following standards:	
Sanitary ceramics with the special WonderGliss surface finish vitime to come. When ordering WonderGliss please add a "1" as eleventh digit		active-looking for a long	
Mounting set for One-Piece and Two-Piece toilets, outlet 3/8" - male thread, wall connection 1/2" - female thread, 1/2", North American version		1.1 lb	001417

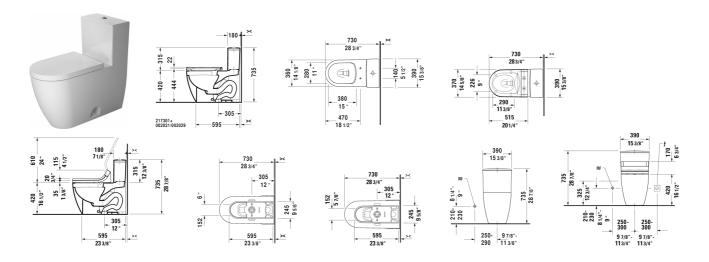

ME by Starck One-Piece toilet Duravit Rimless® # 217301..01 / 217301..85 / 217301..01 / 217301..85

|< 14 1/8" Inch >|

Suitable products	
SensoWash® Starck shower-toilet seat for Starck 2, Starck 3 and Darling New* Rear-, Lady- and Comfortwash, individual adjustment of water-, air- and seat surface temperature as well as nozzle position and jet strength, power actuated lid and seat, night light, 2 individually programmable user profiles, remote control included, self-cleaning wand, on / off-button, Quick release: easy seat unit removal and attachment, 14 5/8" x 20 1/4" Inch	610000
Toilet seat and cover elongated, hinges stainless steel, without slow close,	002021
Toilet seat and cover removable, elongated, hinges stainless steel, with slow close,	002029

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.