


### **IMPORTANT SAFETY INSTRUCTIONS**

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.  
**Note: Some types of fuses must be unscrewed to shut the power off.**
- If you are unclear as to how to proceed, please consult a licensed electrician.

**UNPACK THE FIXTURE:** Check the contents of the box. Box should contain all items on the parts diagram.

### **INSTALLATION INSTRUCTIONS**

1. Secure Mounting Plate (A) to existing junction box (not included) using Mounting Screws (B) provided. Use a leveling tool to ensure that Mounting Plate (A) is level.  
**Note: Mounting Plate (A) should be attached to the back of Fixture (D). Remove it.**
2. Using the pre-drilled holes on Mounting Plate (A), mark location to install Plastic Anchors (H). Remove Mounting Plate (A) and drill pilot holes on the marked spots and insert Plastic Anchors (H).  
**Note: Plastic Anchors (H) should sit flush with the wall.**
3. Re-secure Mounting Plate (A) to the junction box using Mounting Screws (B) and Anchor Screws (G) provided. Ensure Mounting Plate (A) is positioned with the brackets on the top and bottom.
4. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

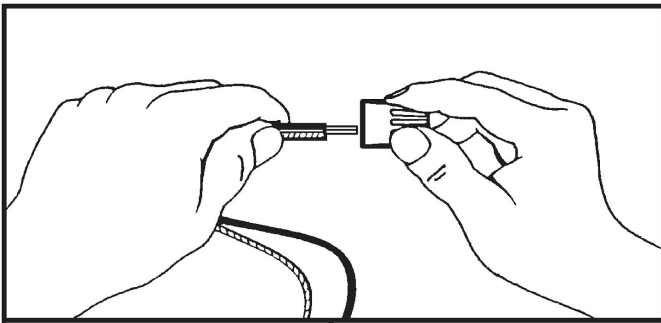

Connect to BLACK house wire	Connect to WHITE house wire
BLACK 	WHITE 
PARALLEL WIRE (ROUND & SMOOTH) 	PARALLEL WIRE (RIBBED / RIDGED) 
WHITE OR GREY WITH TRACER 	WHITE OR GREY WITHOUT TRACER 
BROWN, GOLD OR BLACK WITHOUT TRACER 	BROWN, GOLD OR BLACK WITH TRACER 

- A.** Connect the ground wire (bare copper or green) from your fixture to the:
- 1) ground wire in the junction box, or
  - 2) ground screw in the junction box
- B.** Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C.** Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

5. Place all wires and Wire Connectors (C) back into the junction box.
6. Place Fixture (D) against the wall, ensuring holes on the top and bottom of Fixture (D) align with the holes on Mounting Plate (A). Secure Fixture (D) to Mounting Plate (A) with Backplate Screws (E).
7. Place Decorative Cover (I) over Sockets (F) and secure with Socket Rings (J).  
**Note: Socket Rings (J) should already be attached to Sockets (F). Remove them before installing Decorative Cover (I).**
8. Install bulbs (not included) into Sockets (F).

Enjoy your new fixture!

**HELPFUL TOOLS:** Safety Goggles, Screwdriver,

Ladder

