



**LBL-251 LBL-252
LBL-253A LBL-253B
LBL-254**

**USER MANUAL
SURFACE DOWNLIGHT**

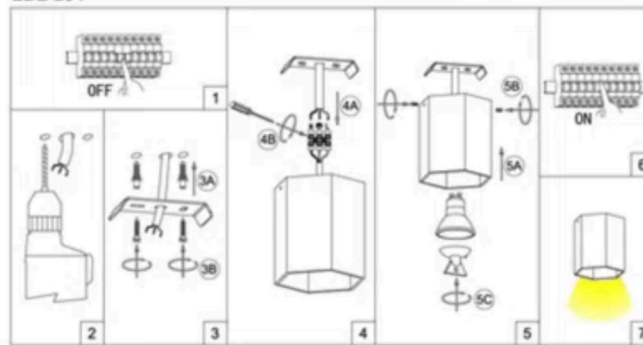

- 1 SWITCH OFF MAIN
- 2 MAKE HOLE PATTERN
- 3 INSTALL THE BASE PLATE
- 4 CONNECT LAMP TO THE MAIN
- 5 DRIVE IN THE SCREWS UNTILL TIGHT
- 6 SWITCH ON THE MAIN AND LIGHT ON

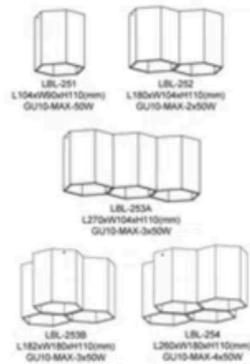

Lamp: GU10 MAX-50W
Input: 220V-240V AC
Frequency: 50/60Hz
Watt: 50W/100W/150W/200W
Life span: 2,000hrs
Operating temp: -20°C~+40°C
Indoor use only
IP20
Dimmable: NO

Cautions: a. Installed by qualified electrician
b. Use only power-supply supplied
by manufacturer for products guarantee