



Archer®

5' Bath Whirlpool with Heater

K-1122-XHG

Features

- 118 Bubblemassage™ airjets.
- Blower motor with 300 W heater, 24" grounding-type plug-in cord, and electronic user control.
- Pump with air switch, in-line heater, and 24" grounding-type plug-in cord.
- Eight color-matched KOHLER hydro-massage jets.
- Slotted overflow for maximum bathing depth.
- Low threshold height.
- Molded lumbar support and armrests for comfort.
- 60 " (1524 mm) x 32 " (813 mm) x 19 " (483 mm).

Material

- ExoCrylic™

Installation

- Drop-in installation.

Required Accessories

K-7271 Slotted Overflow Bath Drain

or

K-7272 Slotted Overflow Bath Drain



ADA

Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

UL 1795

ADA











ICC/ANSI A117.1

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

No change in measurements if connected with drain illustrated. (K-7272)

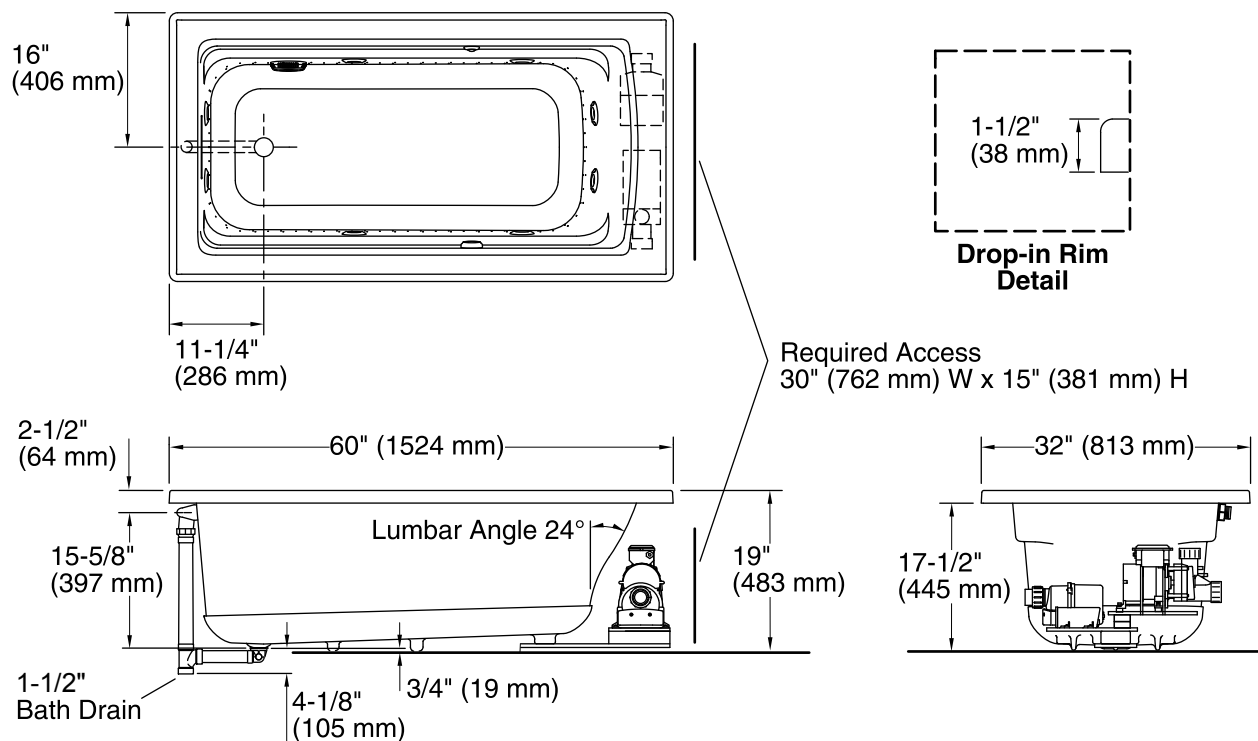

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump, Blower, 120 V, 15 A, 60 Hz
Heater:

Technical Information

All product dimensions are nominal.

Installation: Drop-in
Drain location: Reversible
Basin area, bottom: 45-1/8" x 19-11/16" (1146 mm x 500 mm)
Basin area, top: 52-3/4" x 25-5/16" (1340 mm x 643 mm)
Weight: 124 lbs (56.2 kg)
Minimum floor load: 47.5 lbs/ft² (231.9 kg/m²)
Water depth: 15" (381 mm)
Water capacity: 58 gal (219.6 L)
Electrical rating: Pump: 120 V, 7 A, 60 Hz
Blower: 120 V, 10 A, 60 Hz
Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Notes

Install this product according to the installation guide. Product is designed for drop-in installation only. Product is not suited for three-wall alcove installations with overhead shower.

Will comply with ADA when installed per Section 607 Bathtubs of the 2010 ADA Standards for Accessible Design.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.