


**Parsons bar stool with nail head-Black
bonded leather**

**Parsons bar stool with nail head-Red
bonded leather**

**Parsons bar stool with nail head-White
bonded leather**

Assembly Instructions

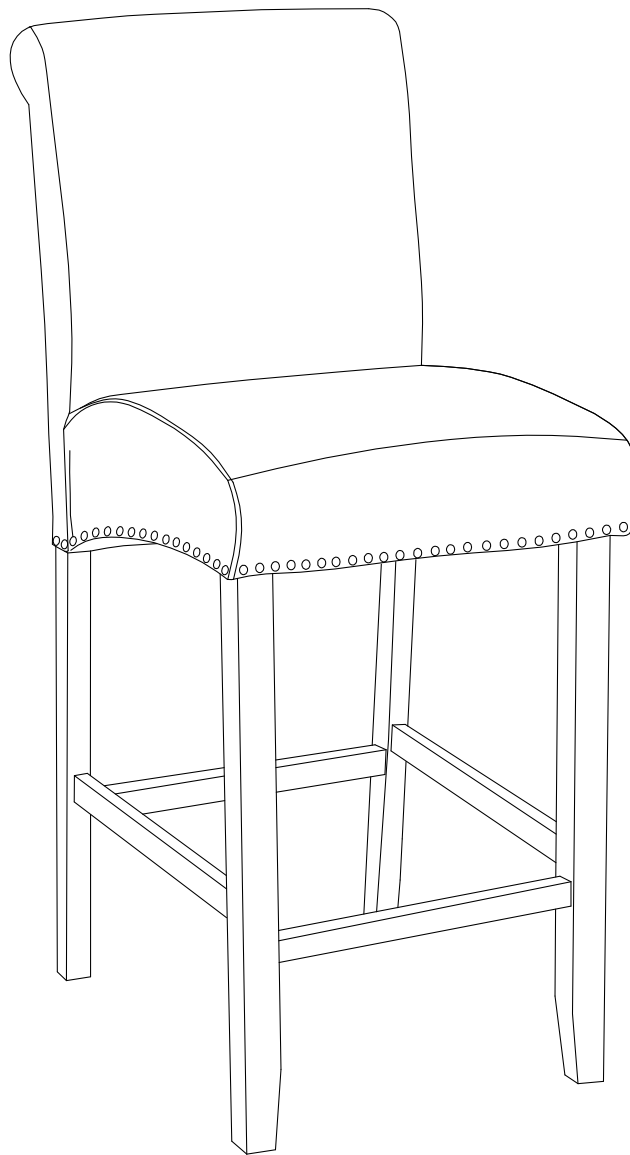


PARSONS BAR STOOL WITH NAIL HEADS

Parts List


Before beginning assembly, separate all parts and carefully study the parts diagrams below.
Review all parts and hardware before disposing of any packaging.
You may receive extra hardware with your unit.
Call Customer Service for missing hardware.

A **Quantity of 1**

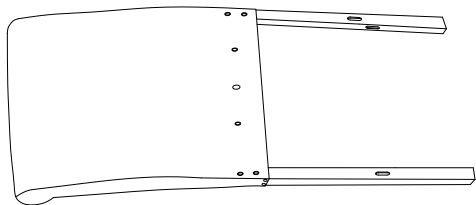


Back Panel

B **Quantity of 1**

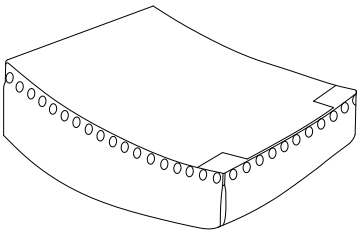


Seat

C **Quantity of 1**




Front Rail

D **Quantity of 1**

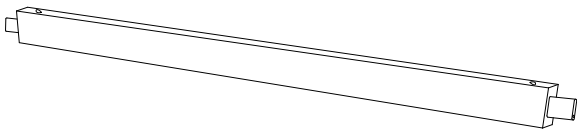


Right Facing Side Rail

E **Quantity Of 1**

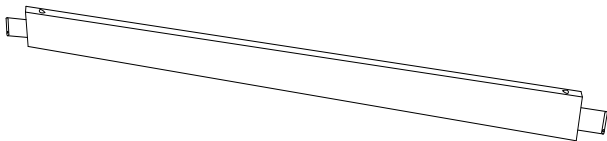


Left Facing Side Rail

F **Quantity Of 1**




Right Facing Leg

G **Quantity of 1**



Left Facing Leg


1



Quantity
of 6

Short Bolt Ø 5/16*2"L


2

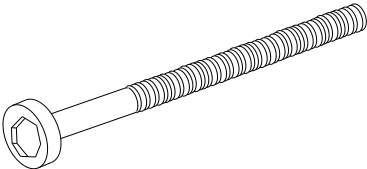

Quantity
of 4

Long Bolt Ø 5/16*3-3/4"L


3



Quantity
of 6

Screw M4*1-3/4"L


4



Quantity
of 10

Flat Washer

5



Quantity
of 10

Spring Washer

6



Quantity
of 1

Allen Wrench

Care and Cleaning Instructions:
Please see care and cleaning label attached to bottom of chair seat.

PARSONS BAR STOOL WITH NAIL HEADS

Assembly Instructions

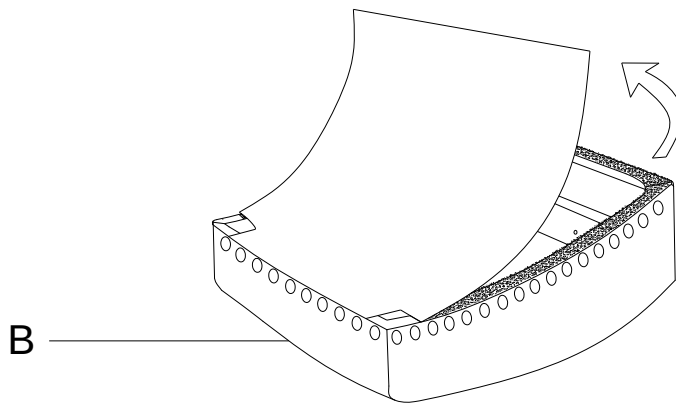


Figure 1

Unpack and lay parts on a clean, padded surface like carpet or a blanket. Check that you have all parts indicated on the front page.

Lift the Velcro strip from the bottom of the Seat (B).

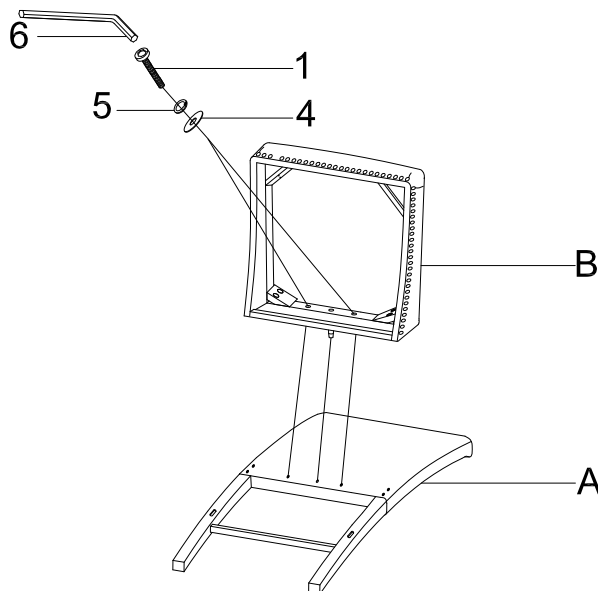


Figure 2

Attach Seat (B) to Back Panel (A) with a Short Bolt (1), Spring Washer (5) and Flat Washer (4).

Tighten them using Allen wrench (6) as shown in Figure 2.

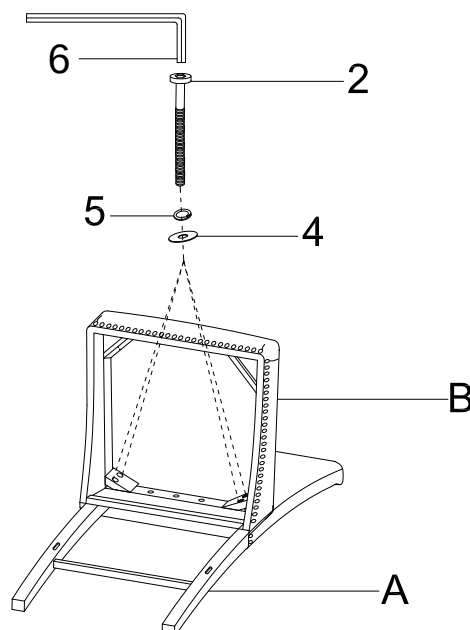


Figure 3

Insert a Long Bolt (2), Flat Washer (4) and Spring Washer (5) into the Seat (B) using the corner pre-hole.

Tighten the Long Bolt (2) using the Allen wrench (6) as shown in Figure 3.

PARSONS BAR STOOL WITH NAIL HEADS

Assembly Instructions

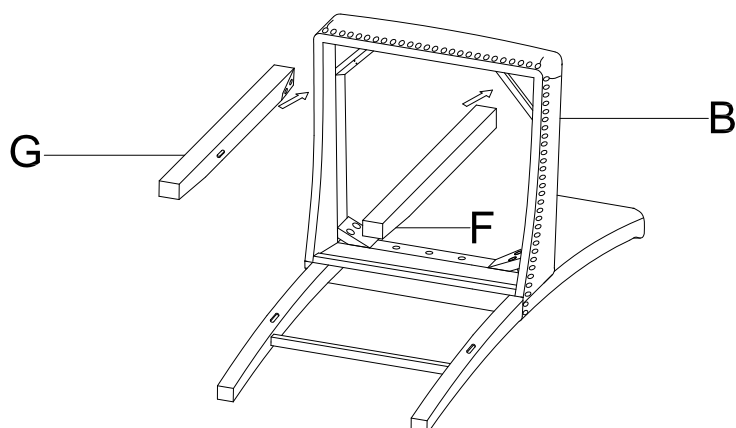


Figure 4

Attach the Right Facing Leg (F) and Left Facing Leg (G) to the Seat (B) as shown in Figure 4.

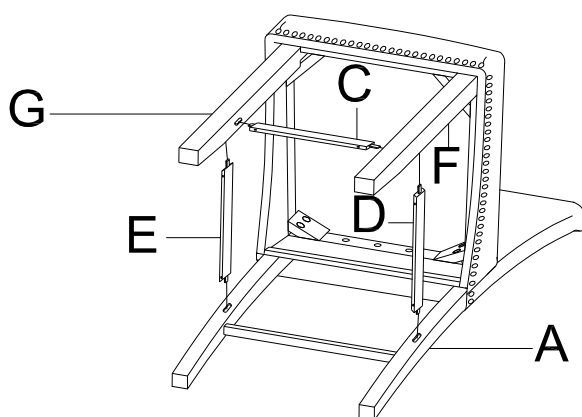


Figure 5

Insert the Front Rail (C), Right Facing Side Rail (D) and Left Facing Side Rail (E) into the holes on the Right Facing Leg (F), Left Facing Leg (G) and Back Panel (A) as shown in Figure 5.

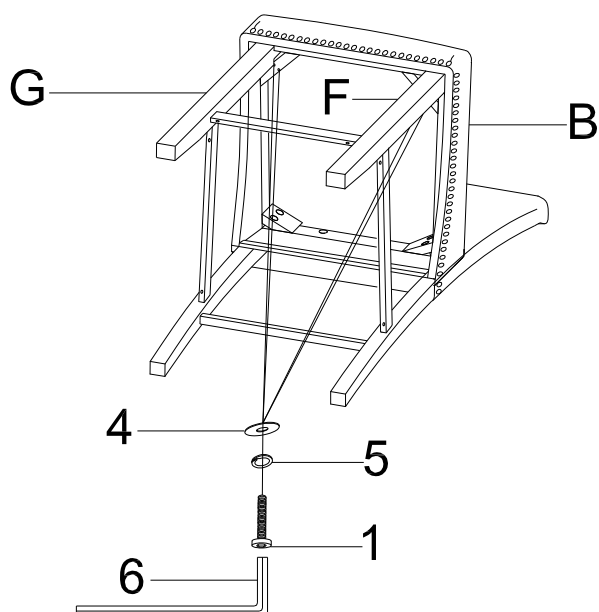


Figure 6

Use a Short Bolt (1) with a Flat Washer (4) and Spring Washer (5) to connect the Right Facing Leg (F) and Left Facing Leg (G) to the Seat (B).

Tighten the Short Bolt (1) using the Allen Wrench (6) as shown in Figure 6.

PARSONS BAR STOOL WITH NAIL HEADS

Assembly Instructions

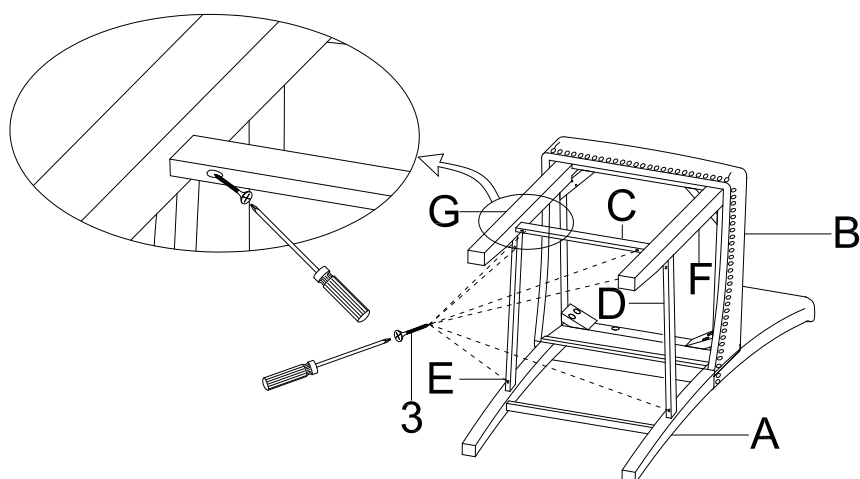


Figure 7

Use Screws (3) to connect the Front Rail (C), Right Facing Side Rail (D) and Left Facing Side Rail (E) to the Right Facing Leg (F), Left Facing Leg (G) and Back Panel (A).

Tighten Screws (3) using a screwdriver (not included).

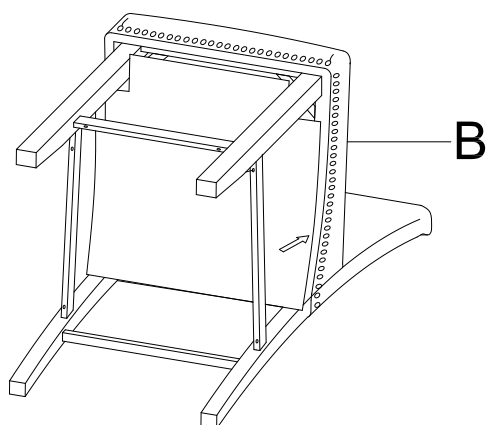


Figure 8

Close the Velcro strip along the bottom of the Seat (B).

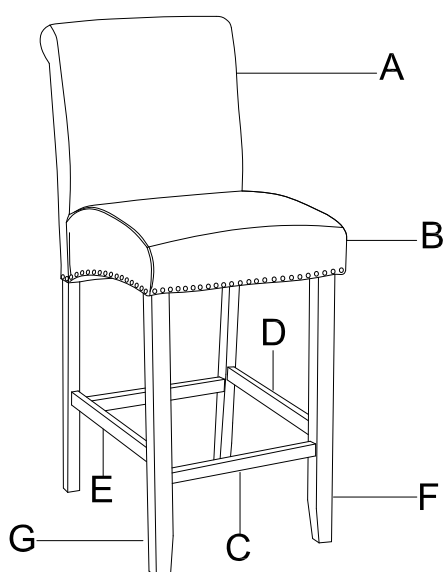


Figure 9

Recheck that all bolts are securely tightened.

Turn over the Barstool.

Now your Barstool is ready to use!