




Product Installation Instructions

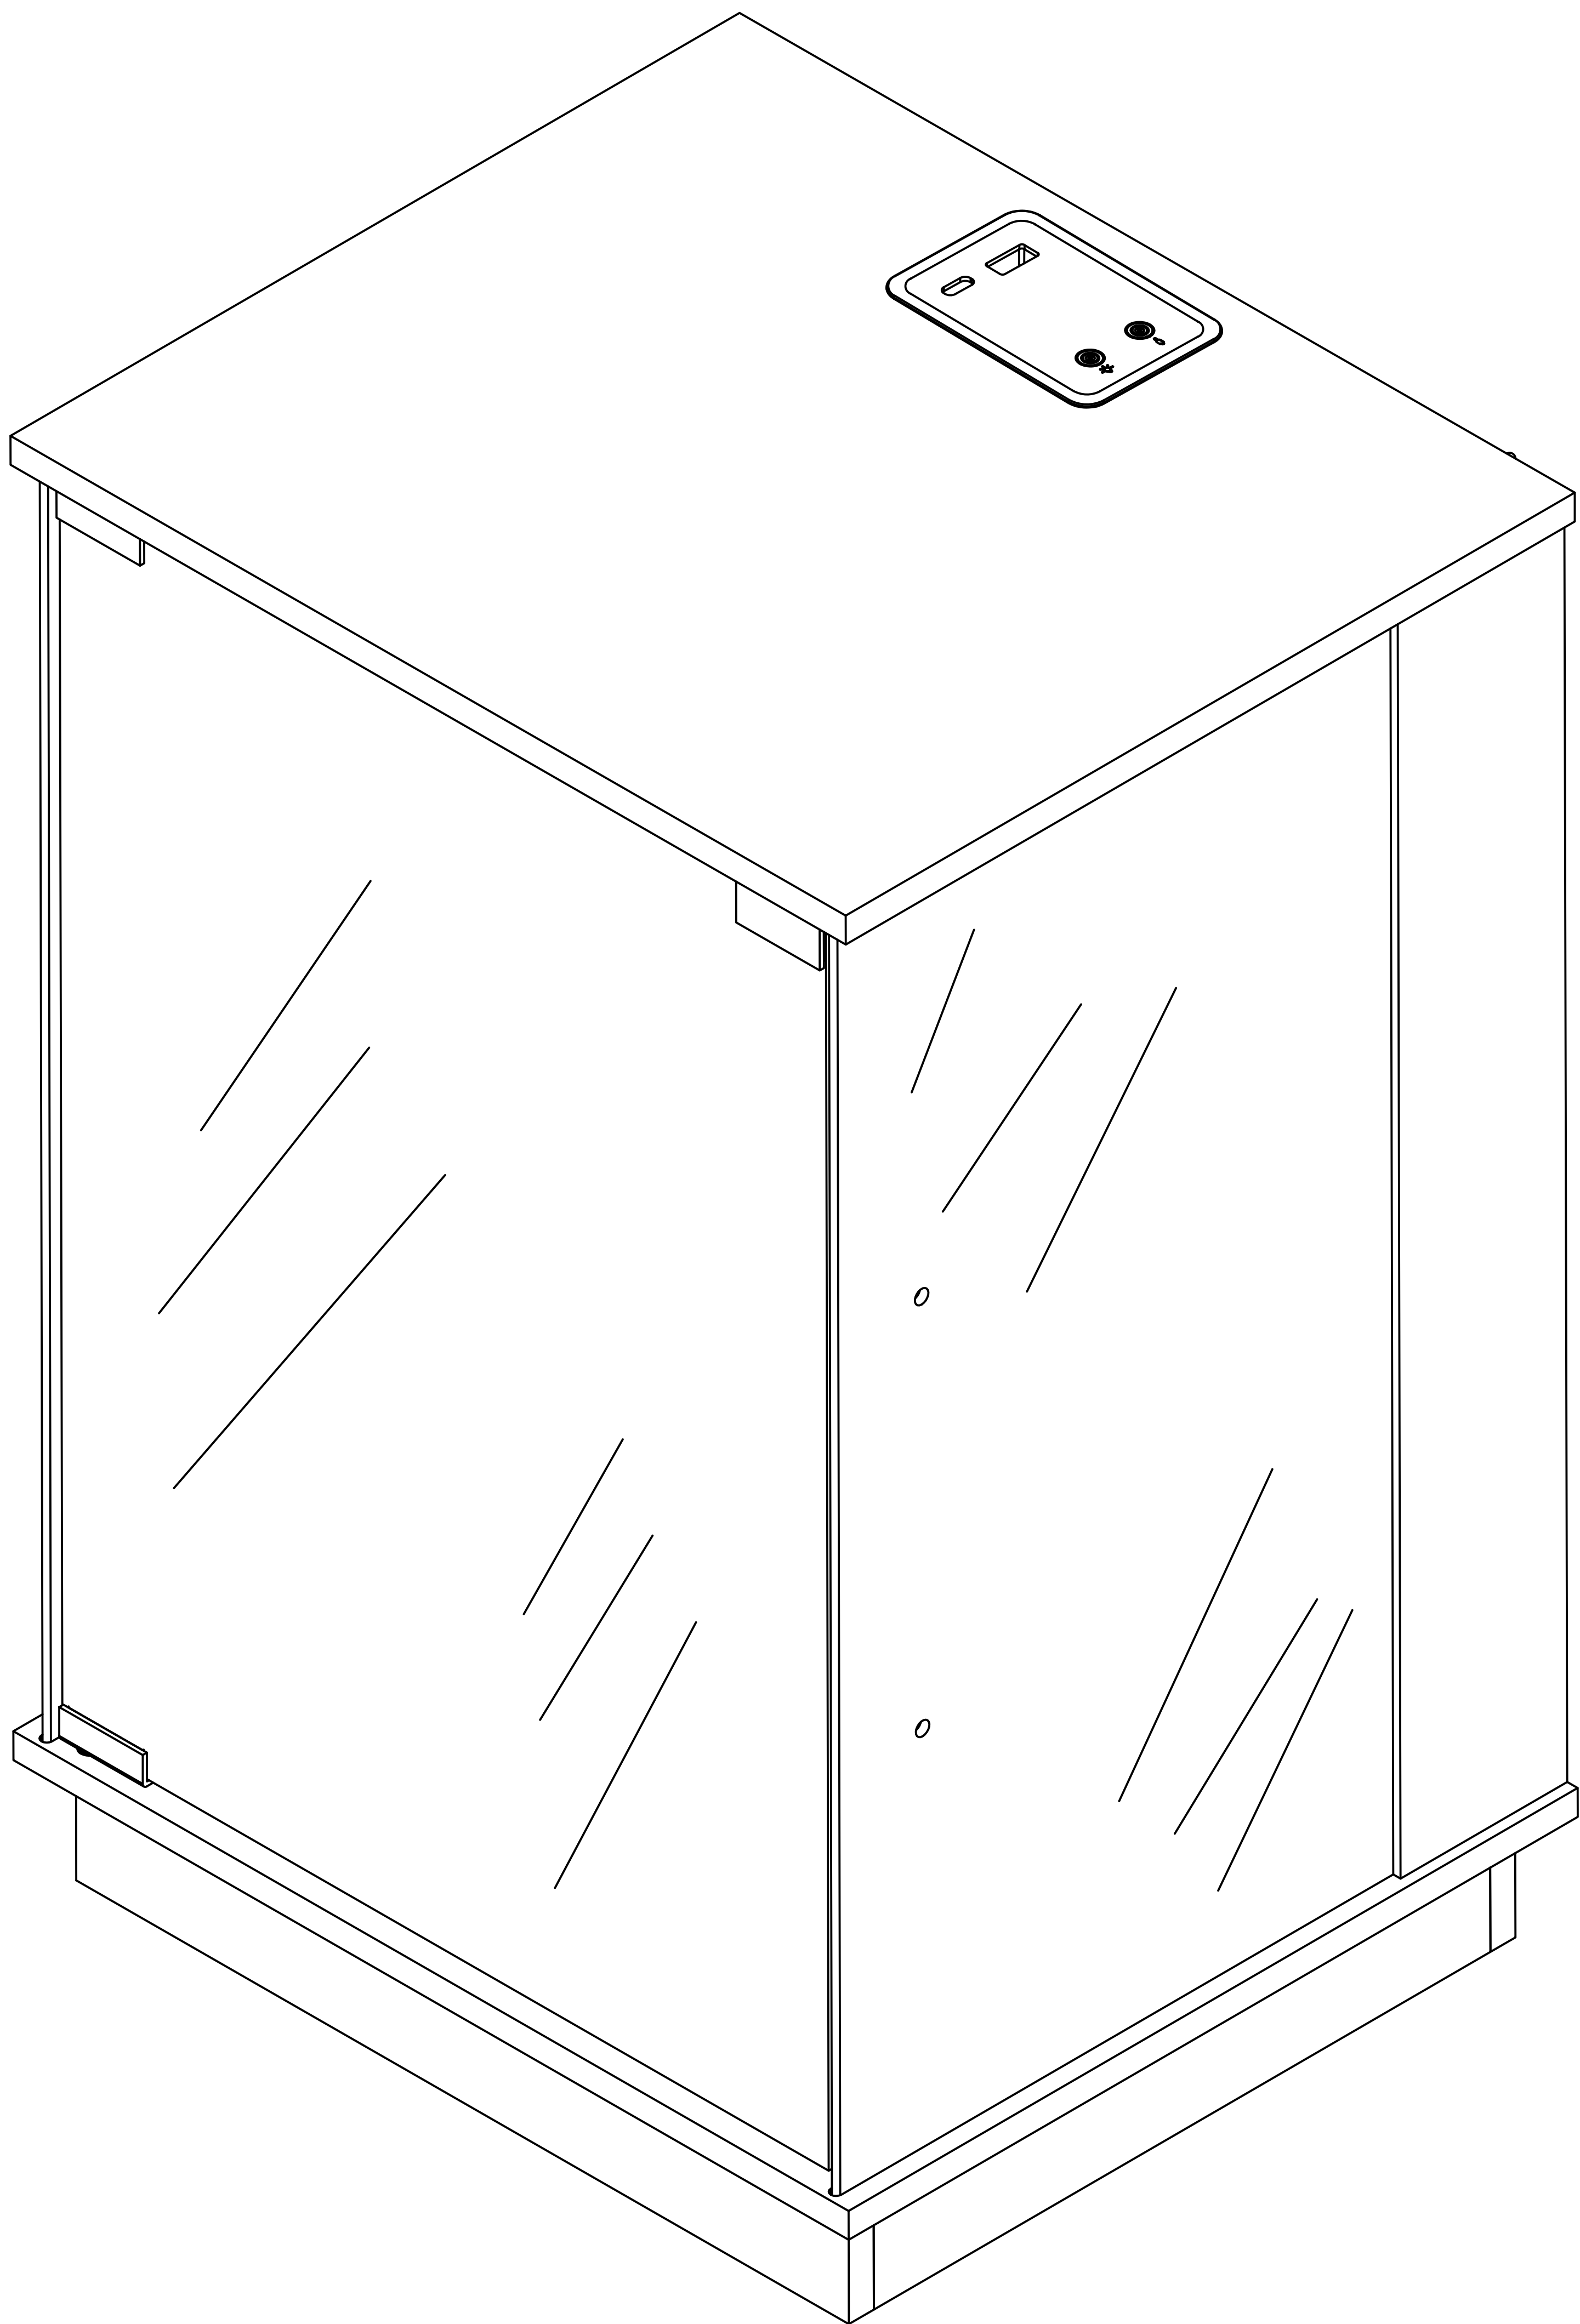


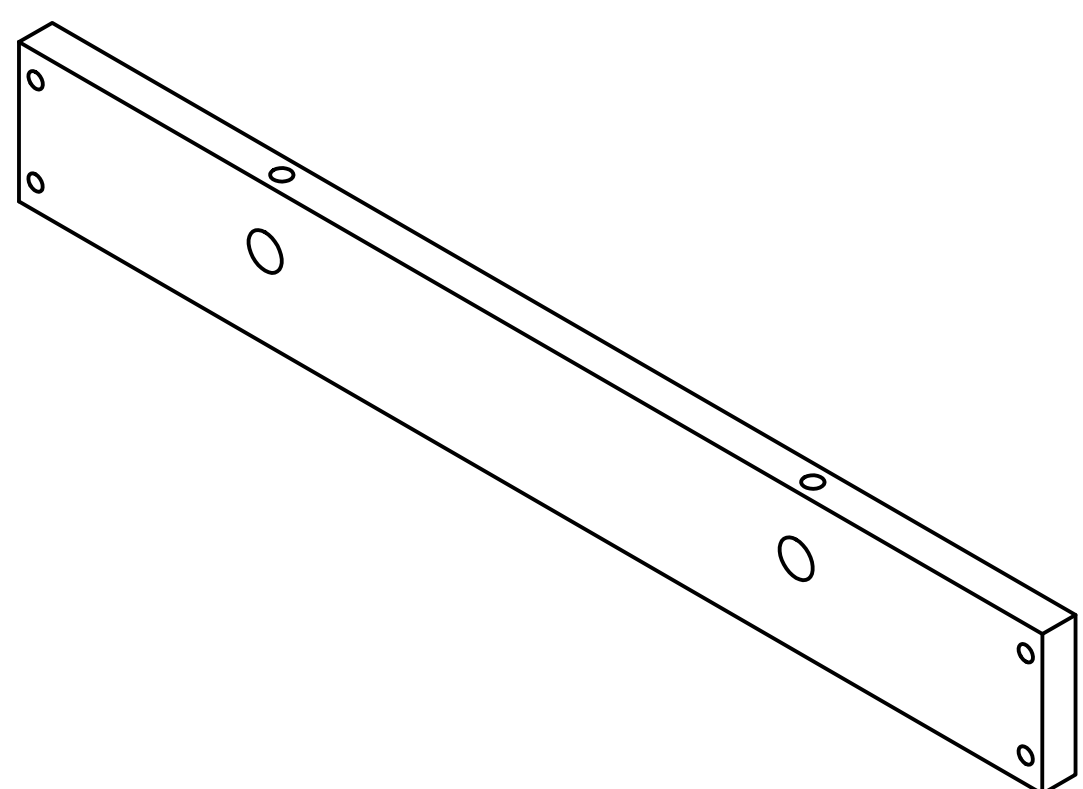


01x2

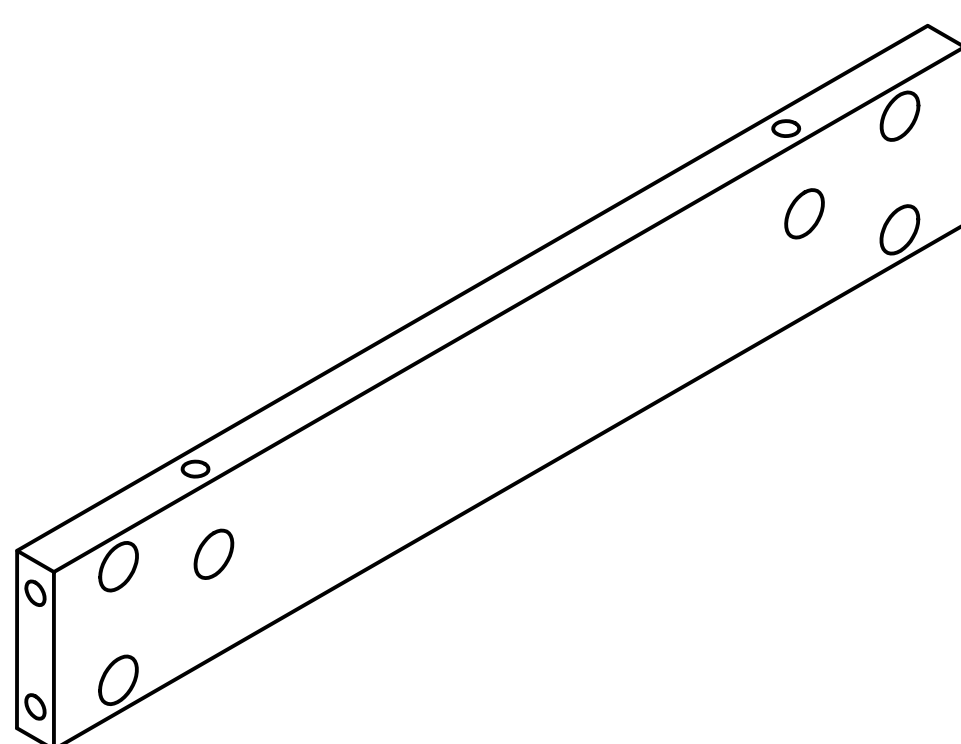


02x2

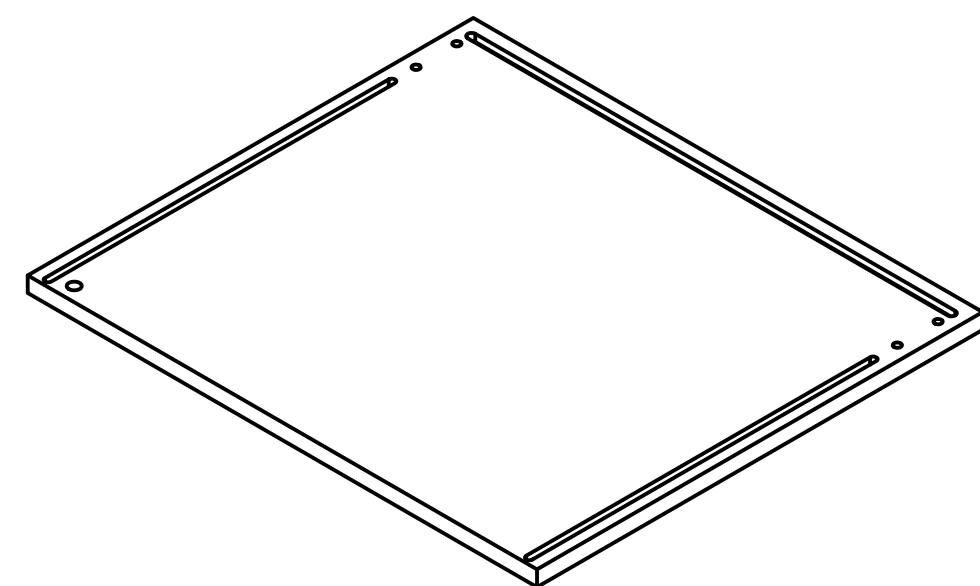


03x1

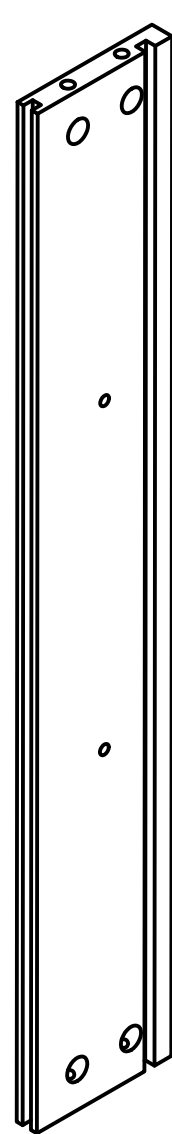


04x2

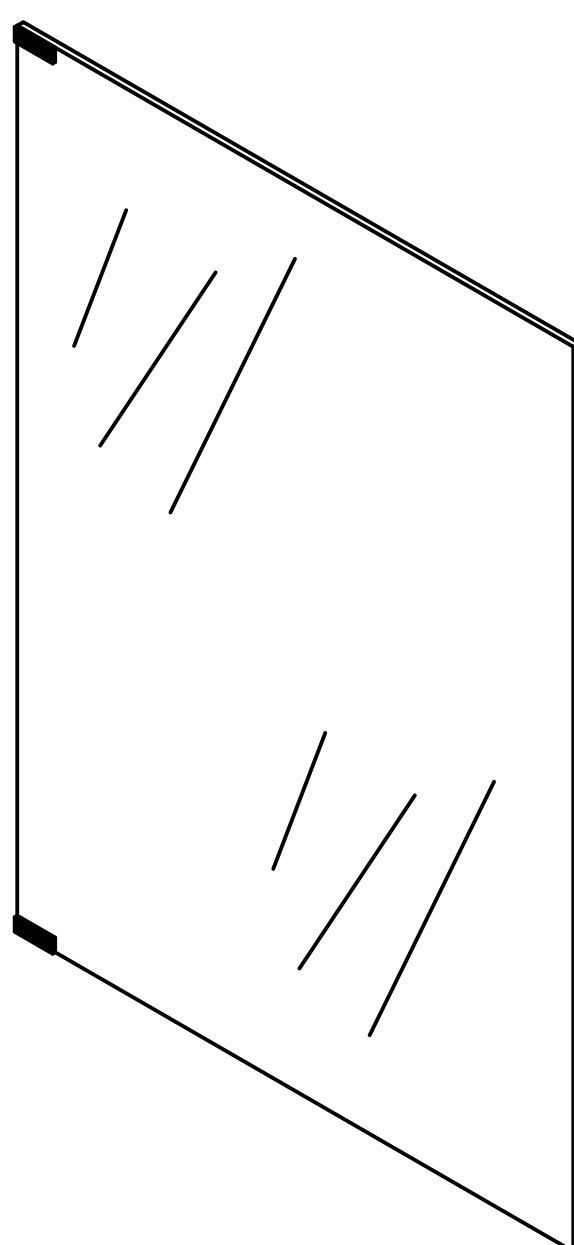


05x1

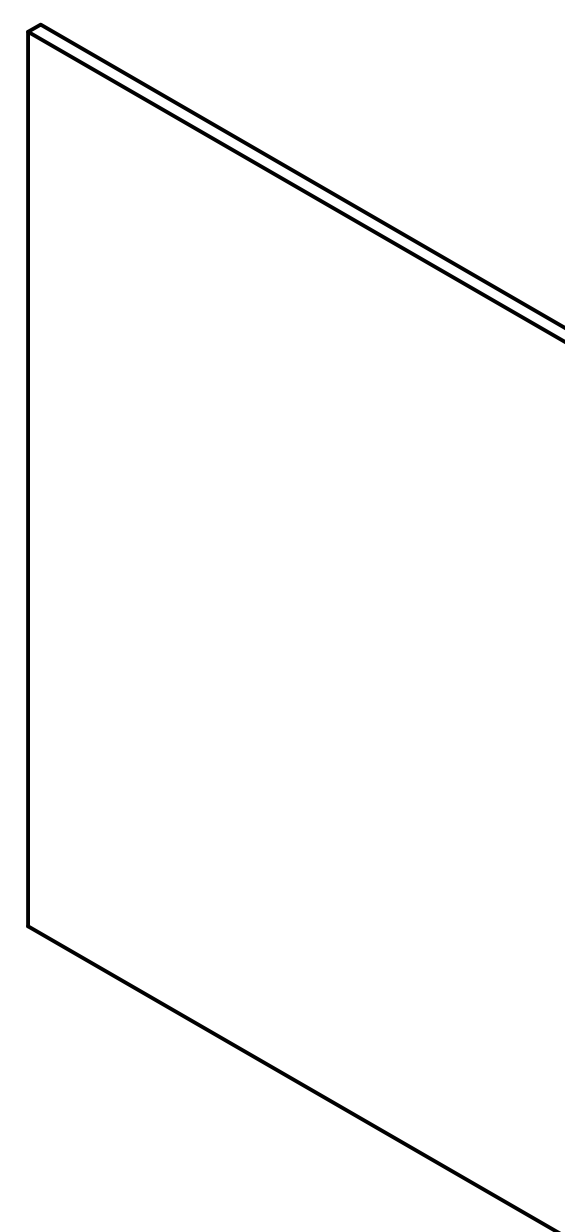


06x1

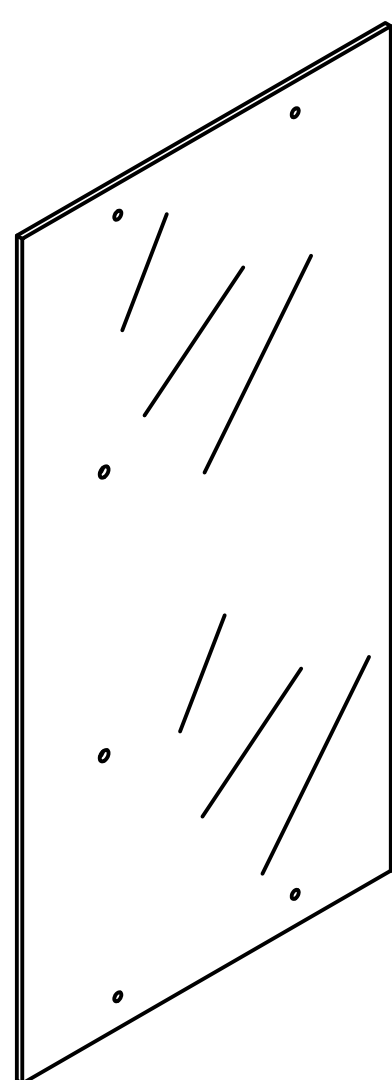


07x2









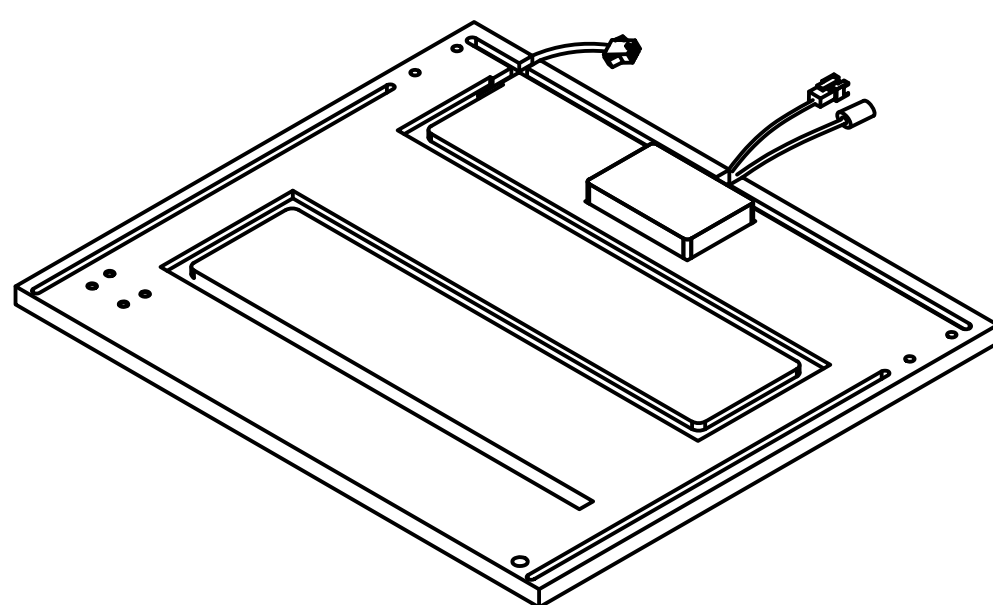



08x1

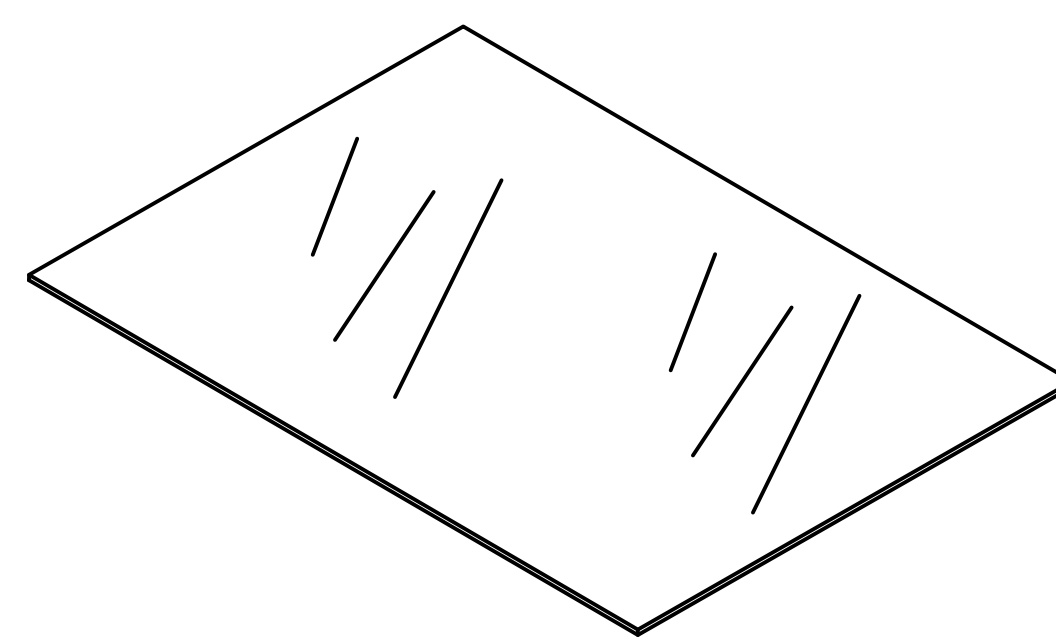


09x2

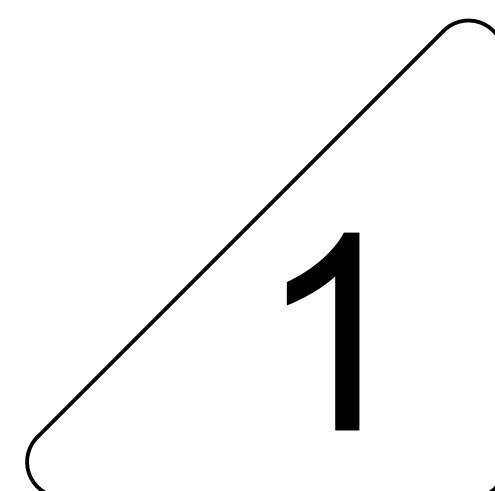

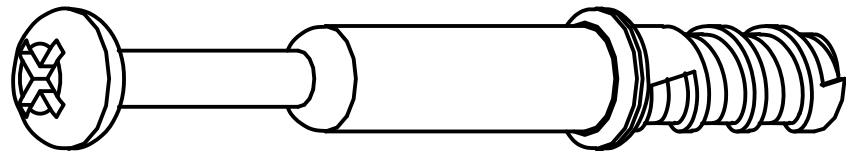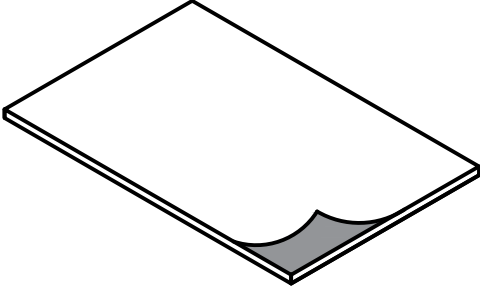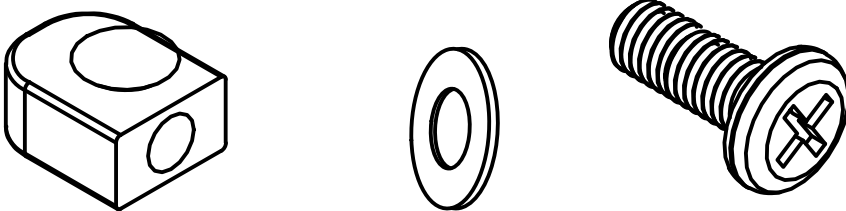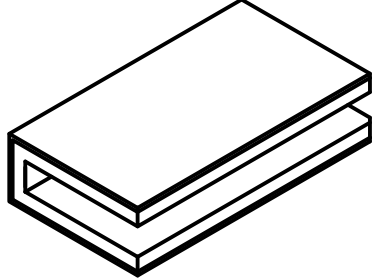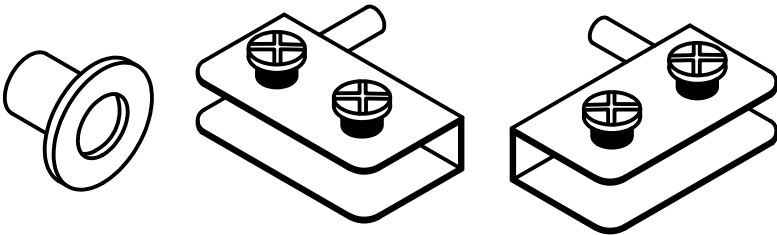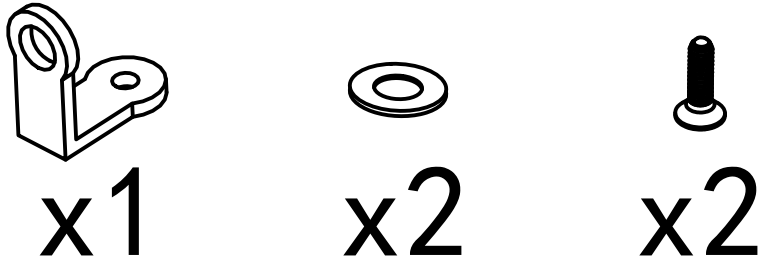A		Two In One Screw (6x28mm)	24pcs +4pcs
B		Two In One Nut (10x12mm)	24pcs +4pcs
C		Non-slip pads (50x10mm)	4pcs +2pcs
D		Laminated clamp	4pcs +1pcs
E		Laminate support nail (6x16mm)	4pcs +2pcs
F		Rebound device & Screw (3x16mm)	4pcs +2pcs 1pcs
		Iron sheet	1pcs
		Hinge	2pcs 1pcs 1pcs
G		Fixing clip & screw (3x16mm)	8pcs +2pcs
H		Corner Bracket, Screw (4x8mm)	8pcs +2pcs
I		AC/DC Adapter (12V==2. 0A)	1pcs

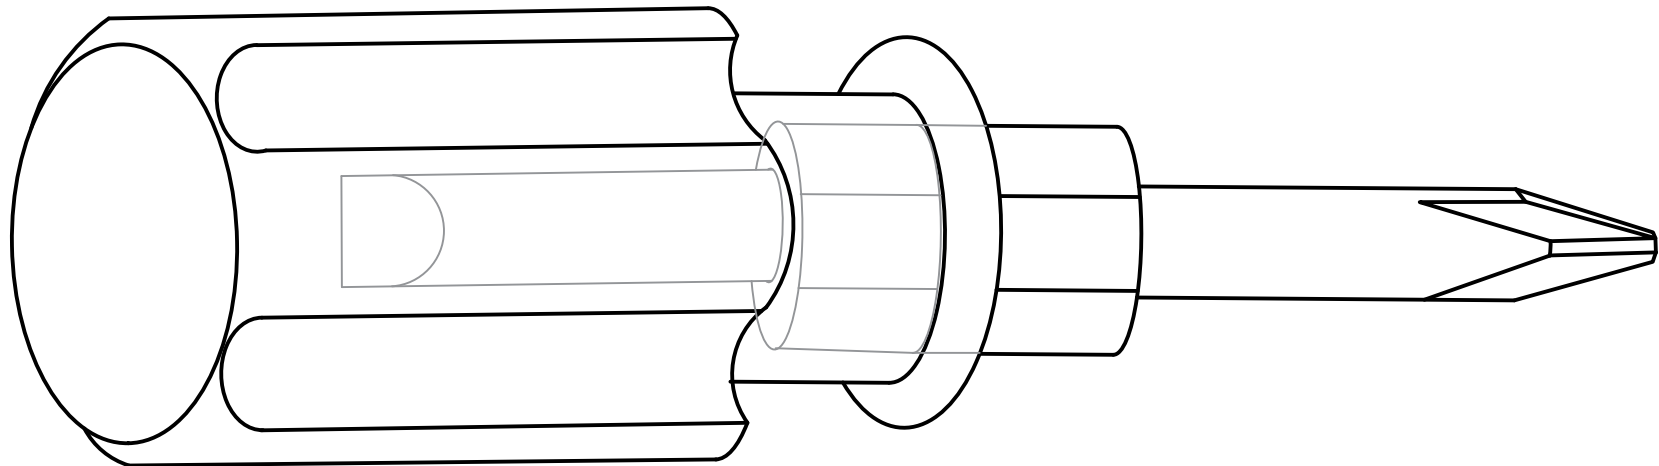


1pcs

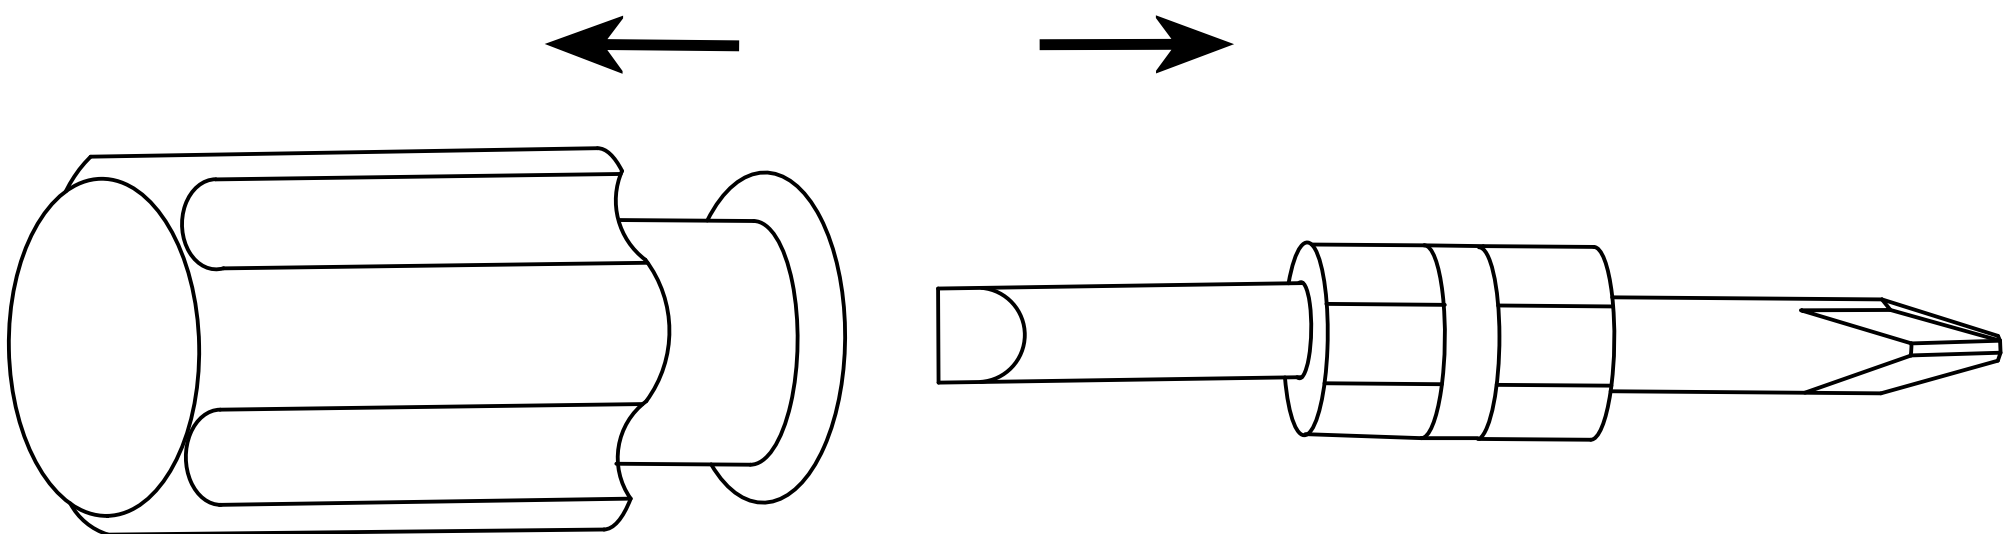


Double-head screwdriver, use as required

Product structure decomposition

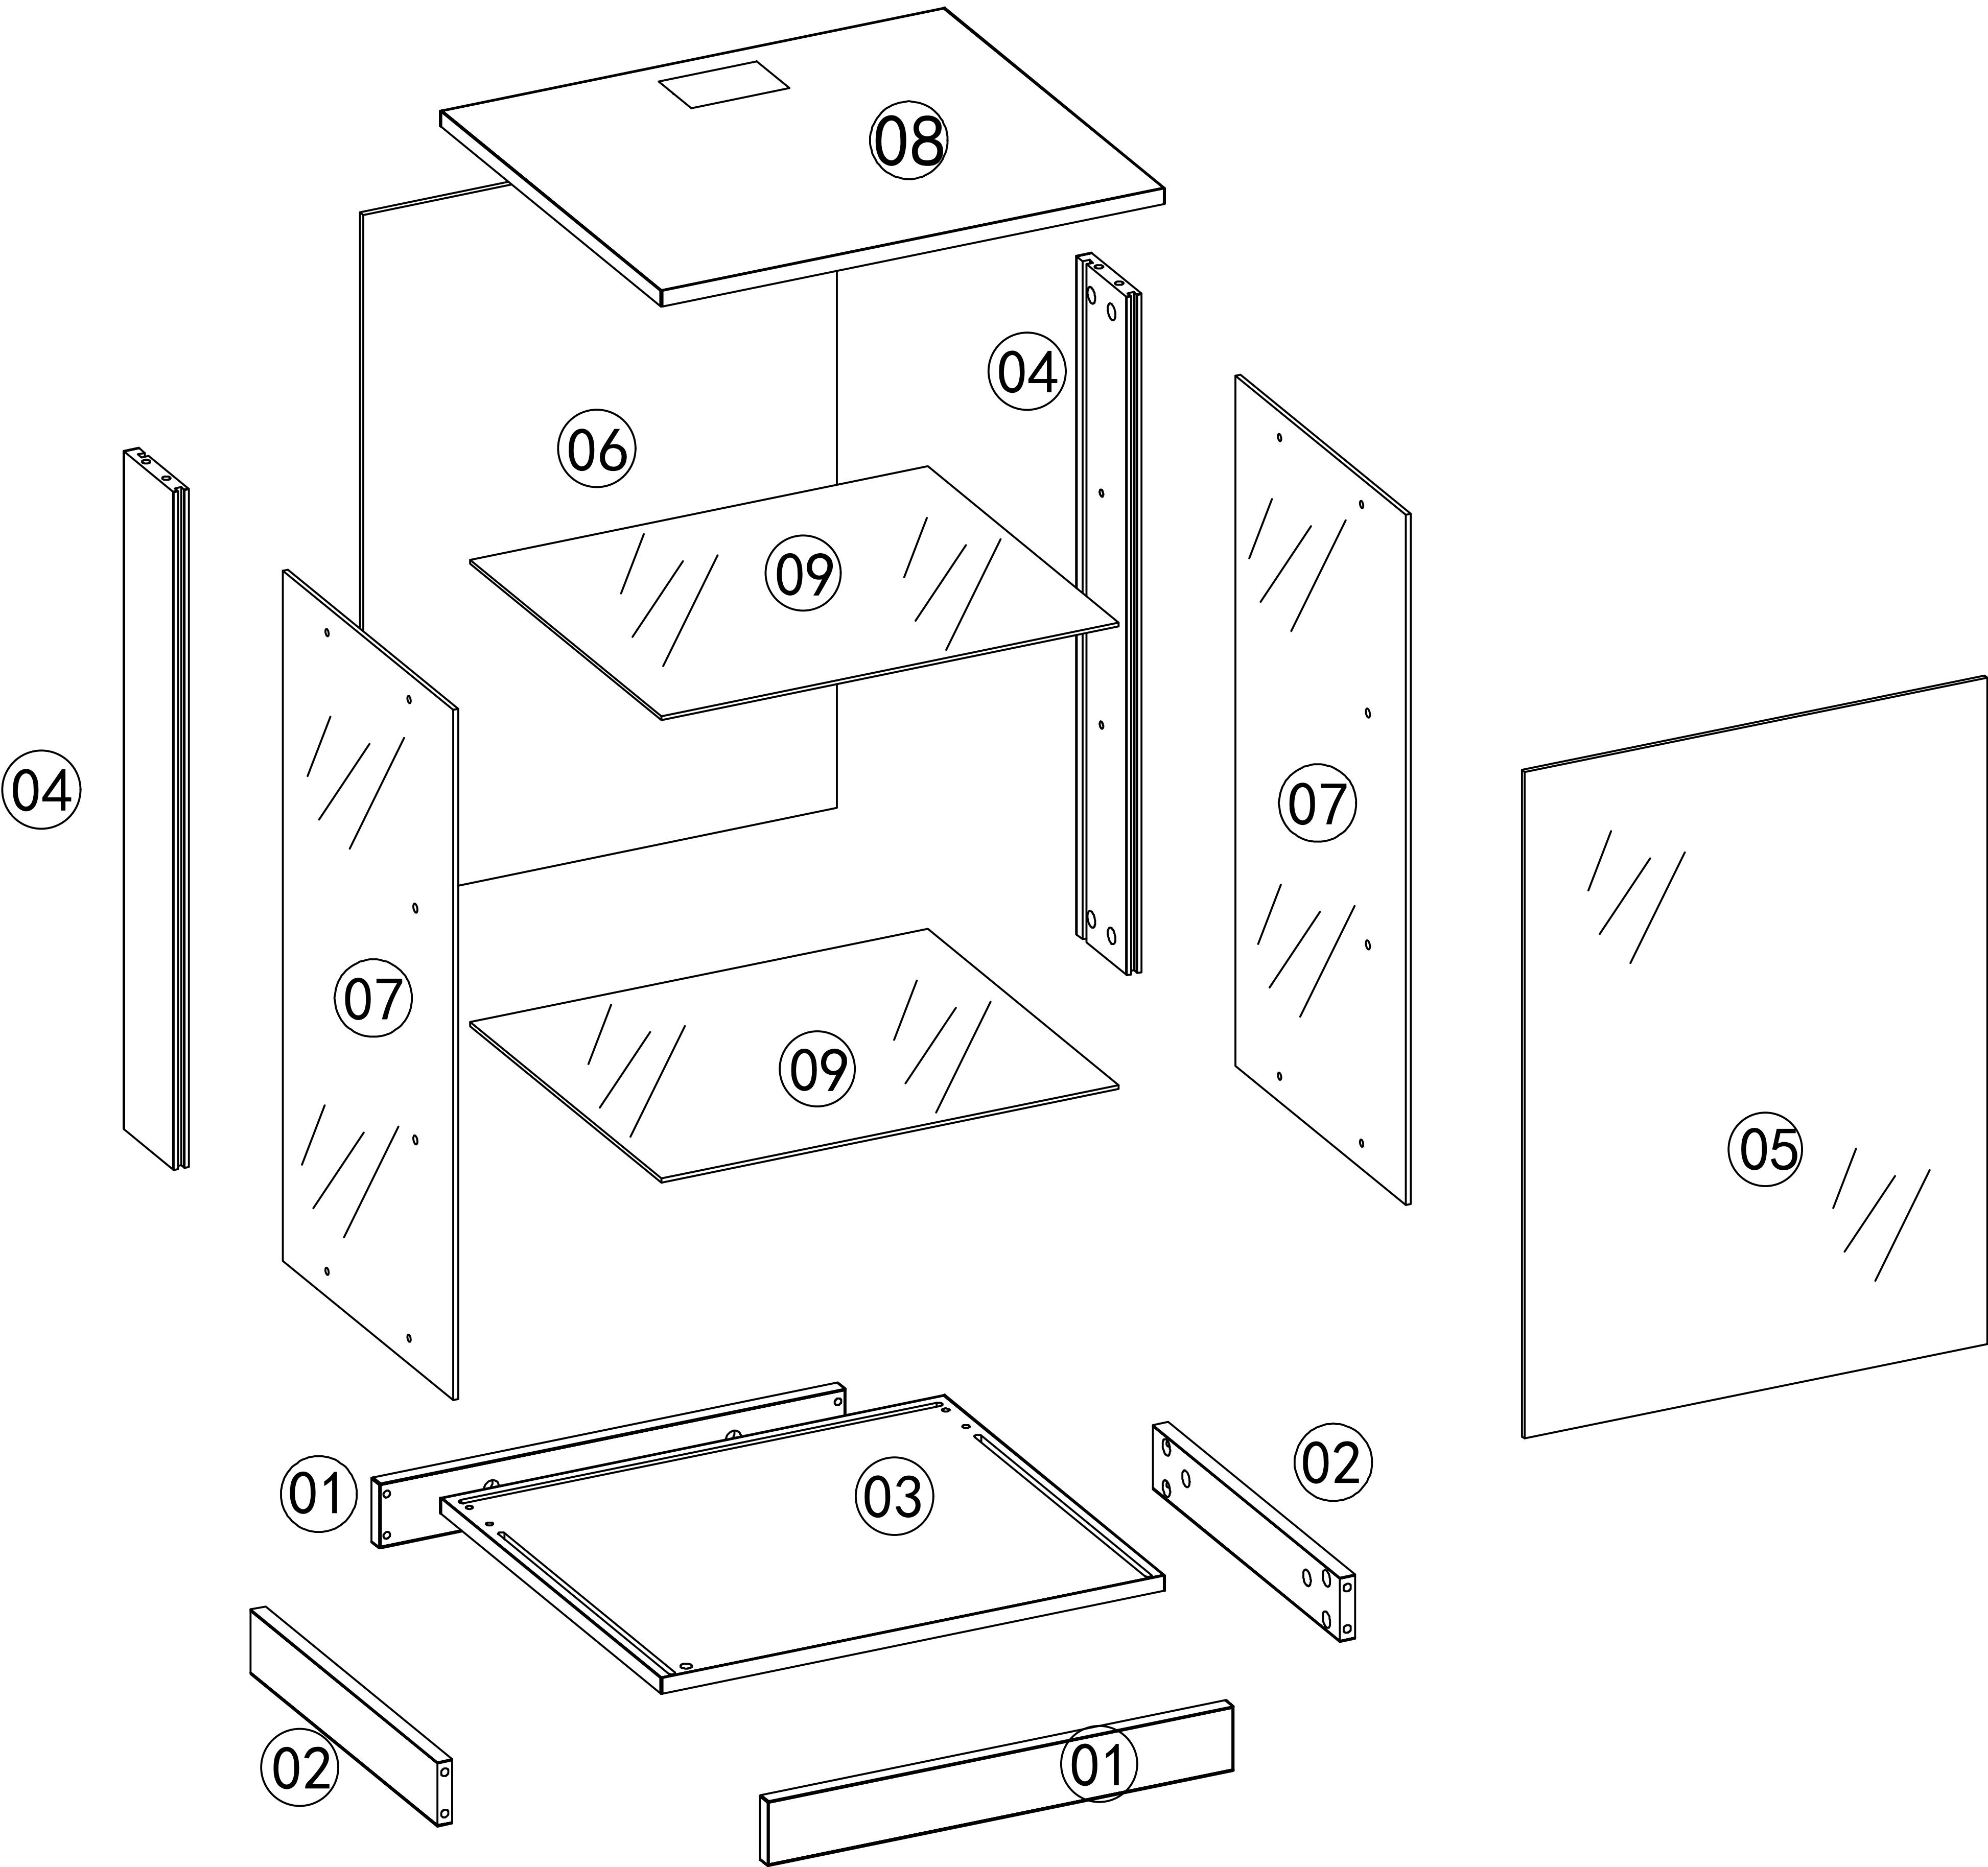


Use parts ① and ②




Step1

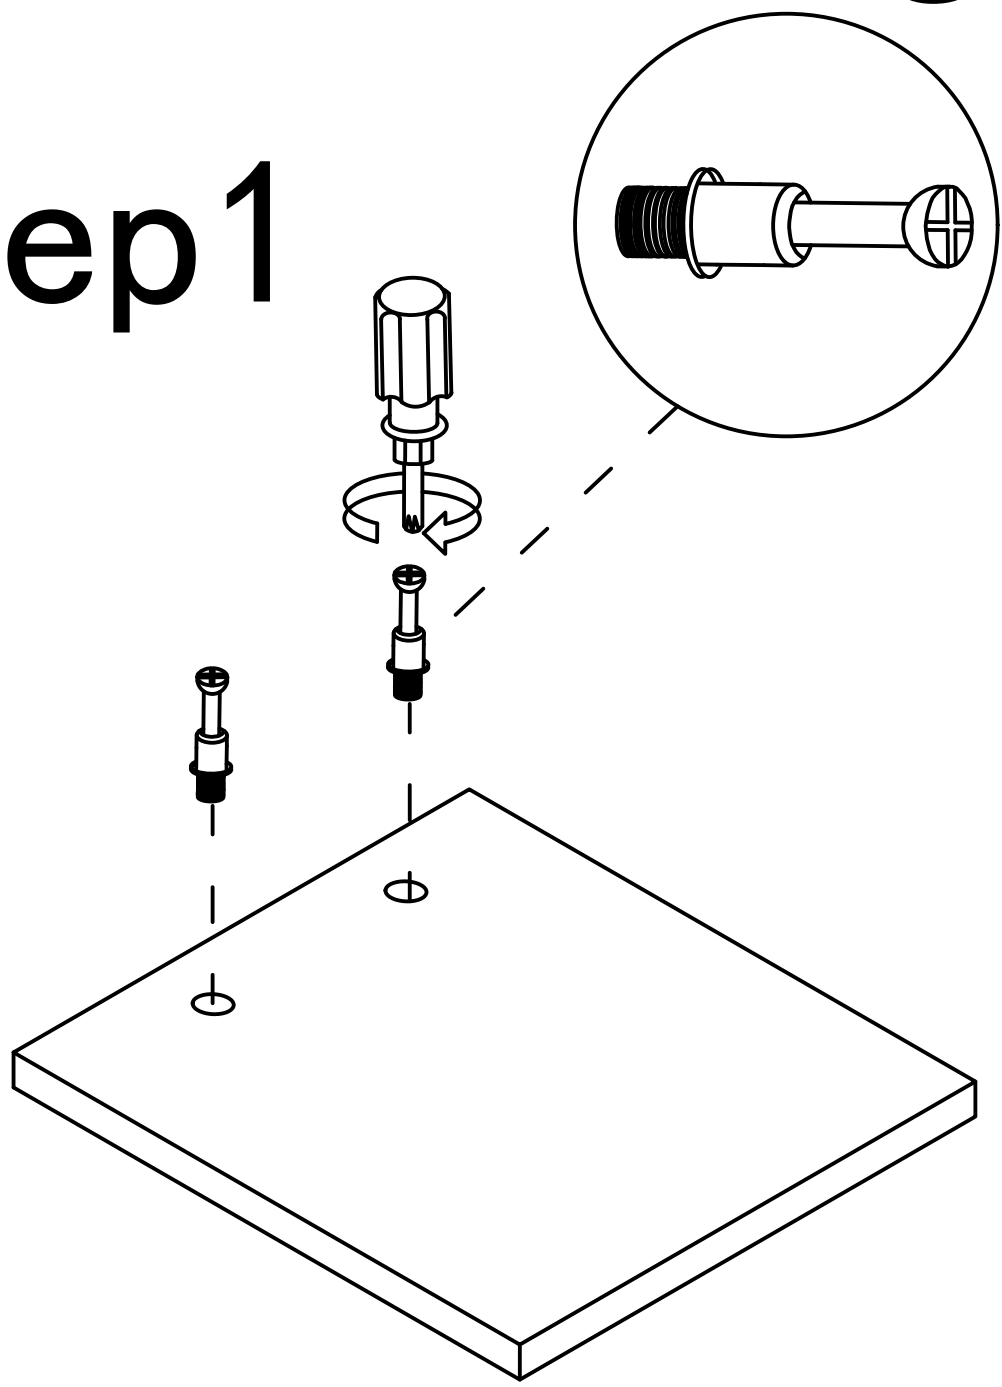

Step2

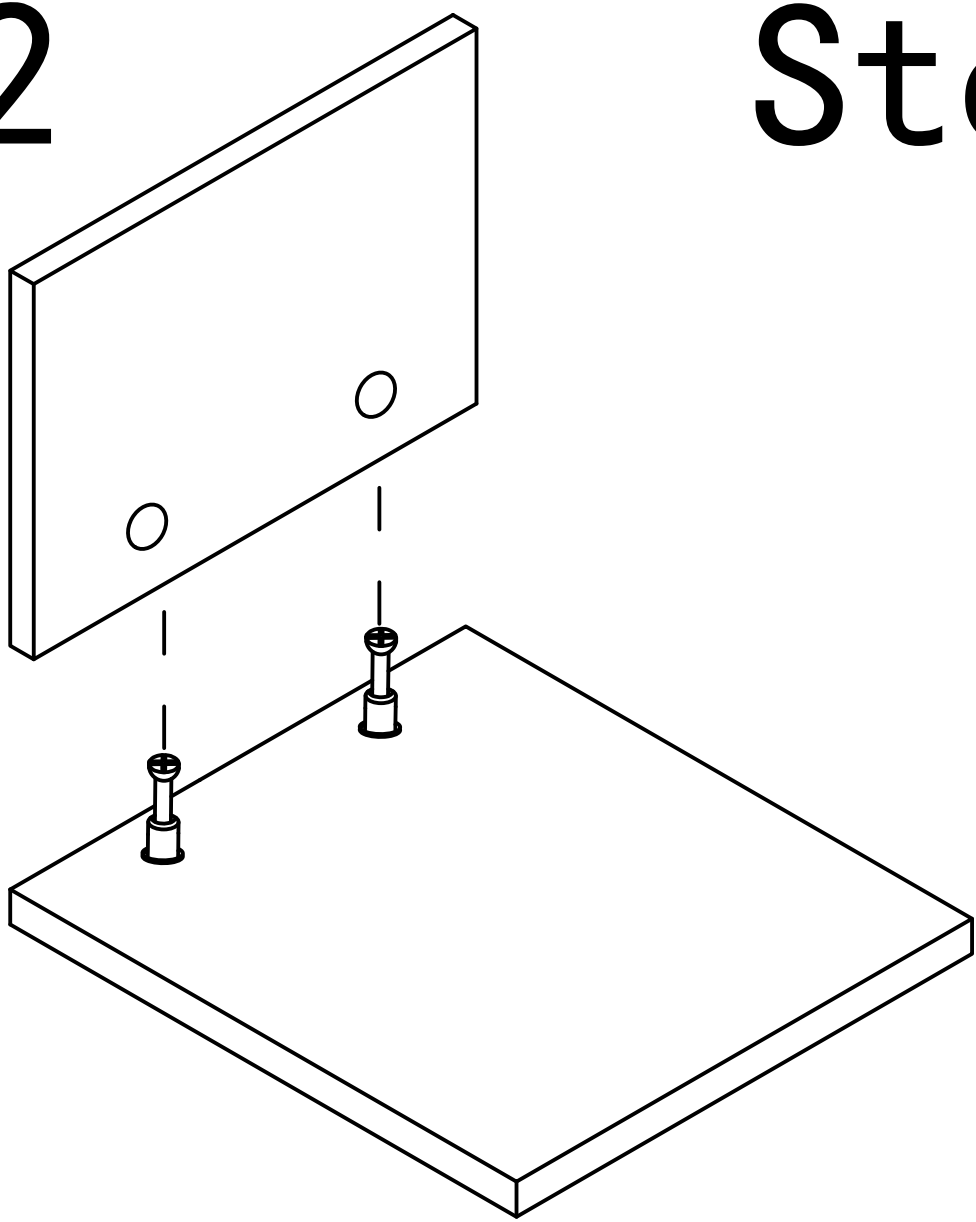



Step3

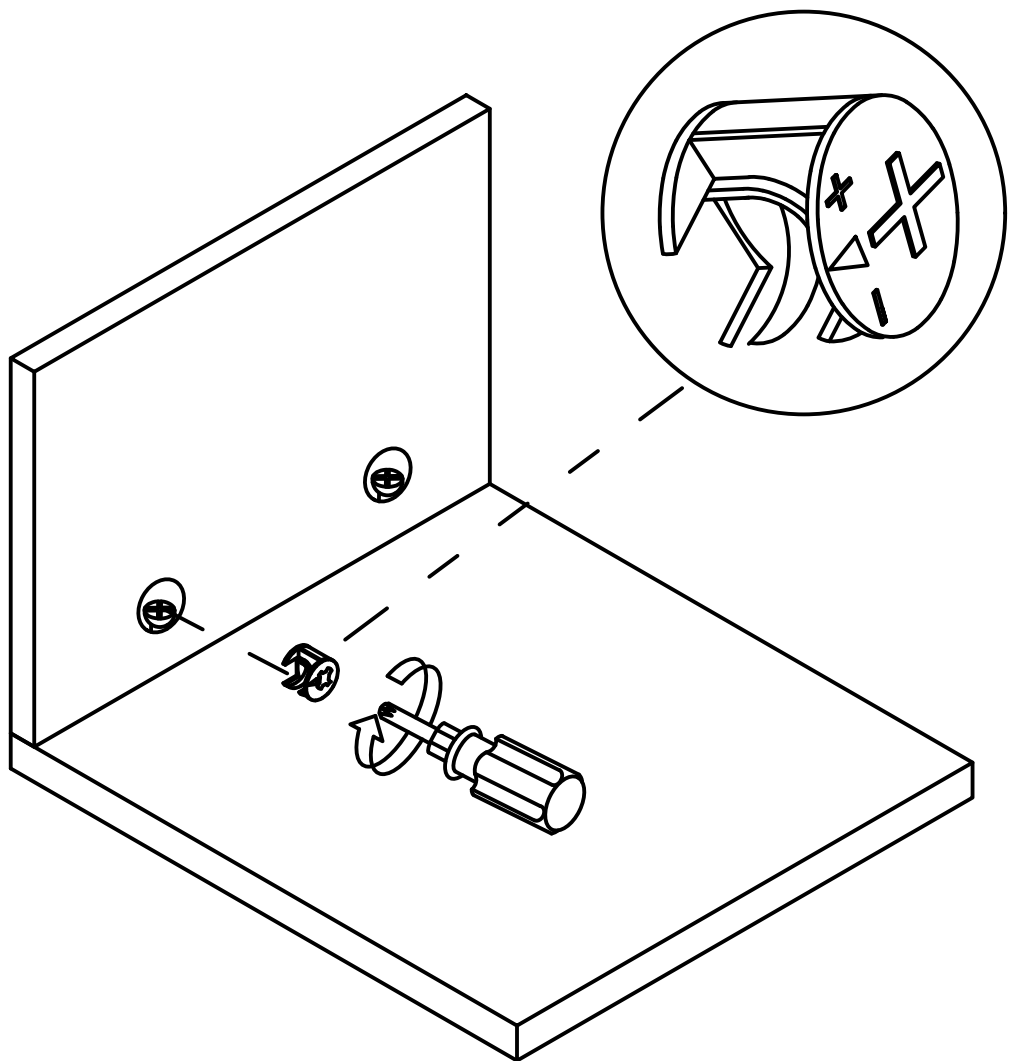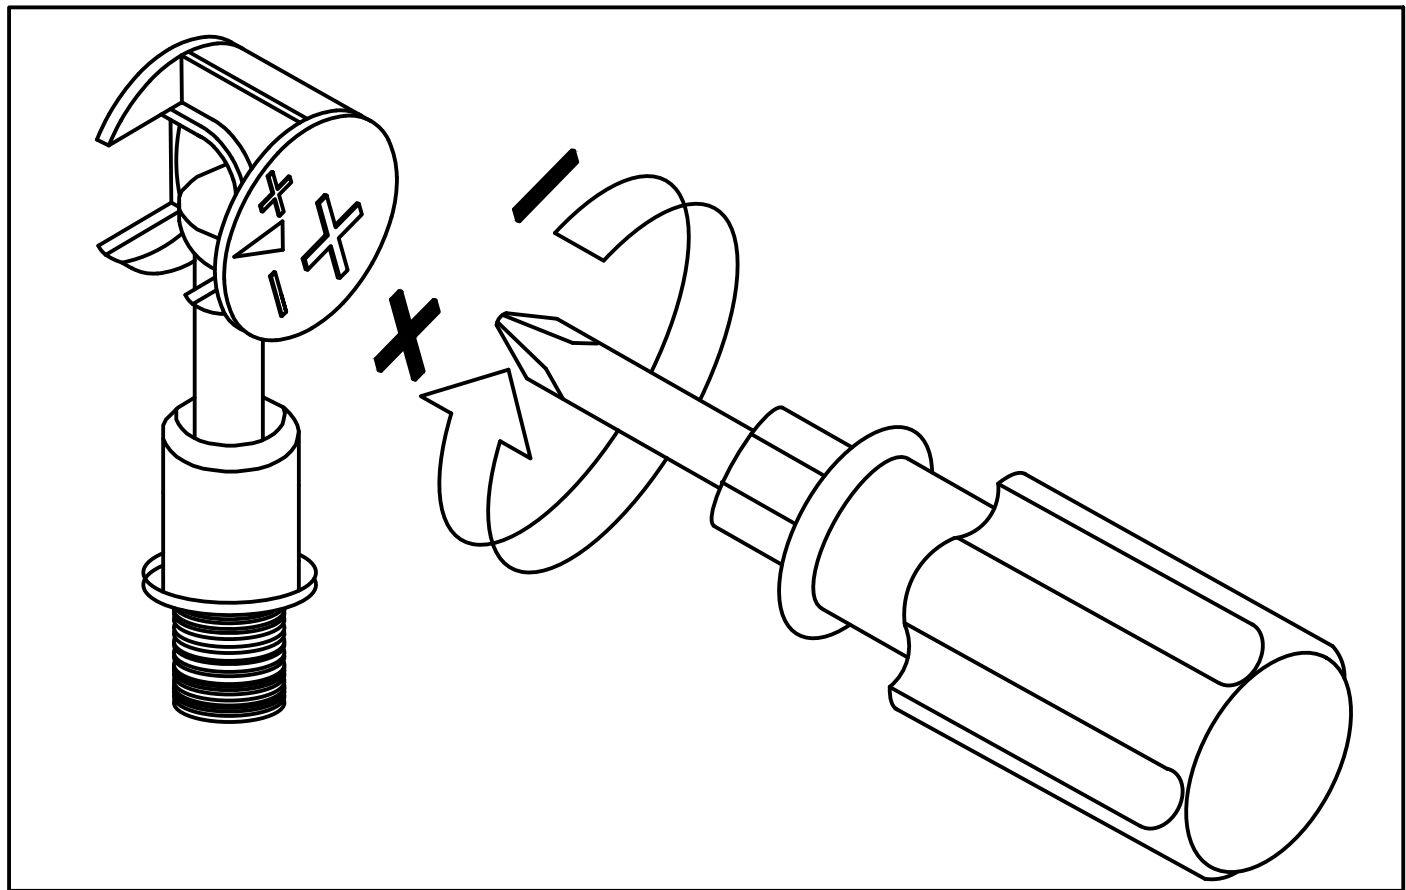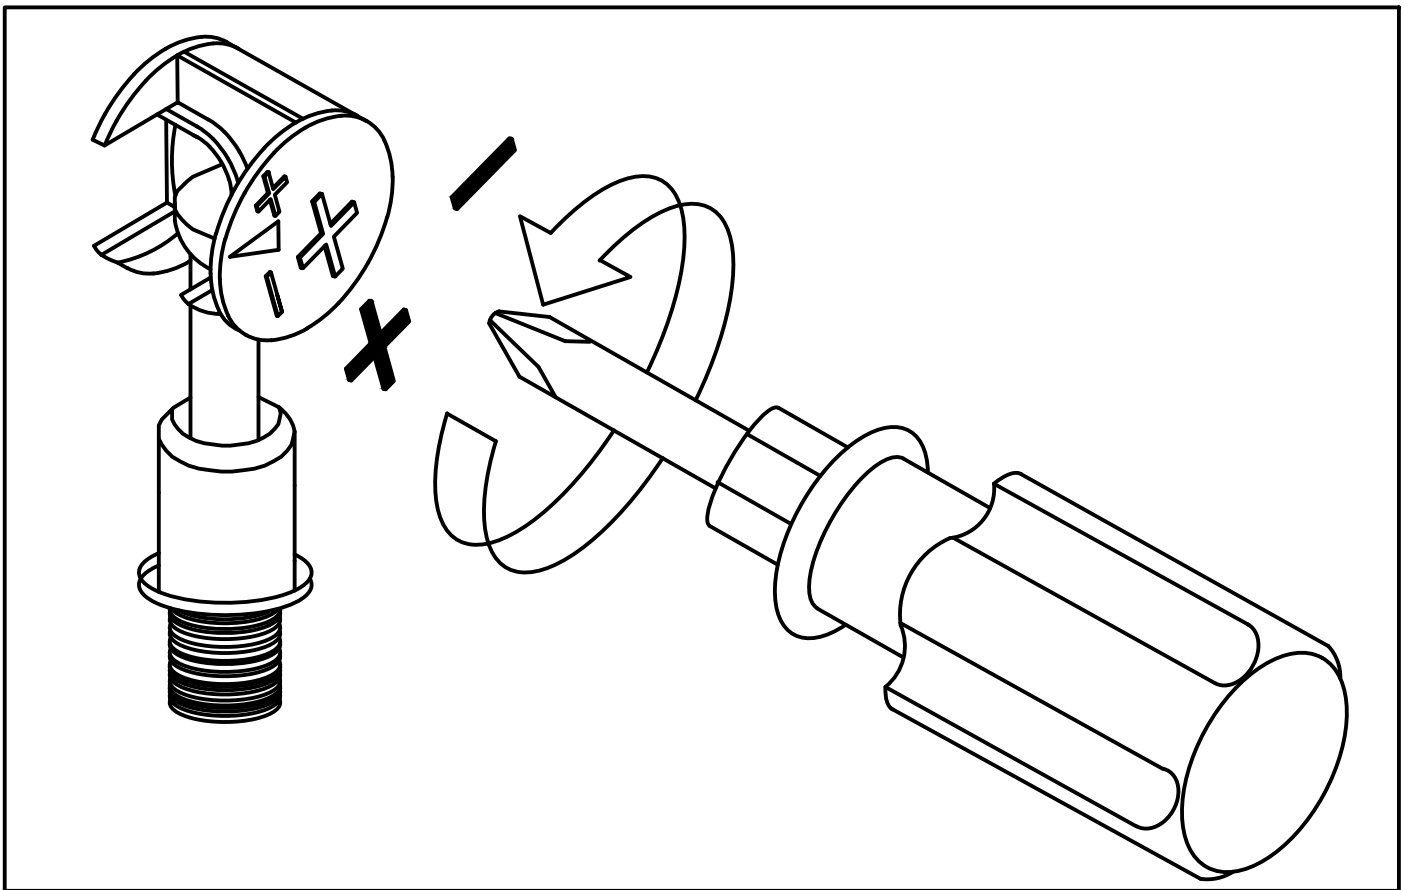

Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

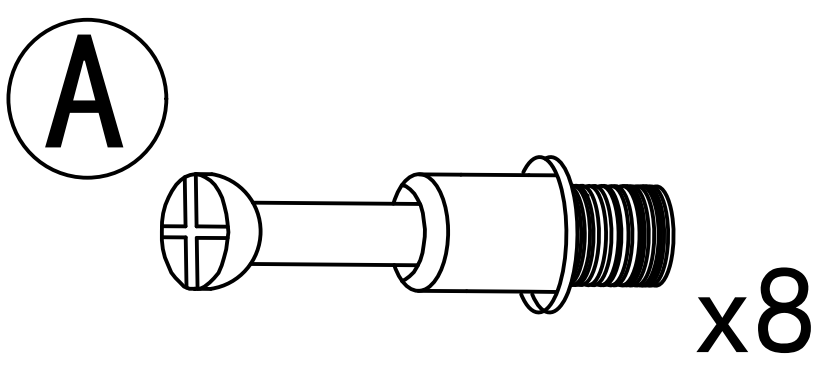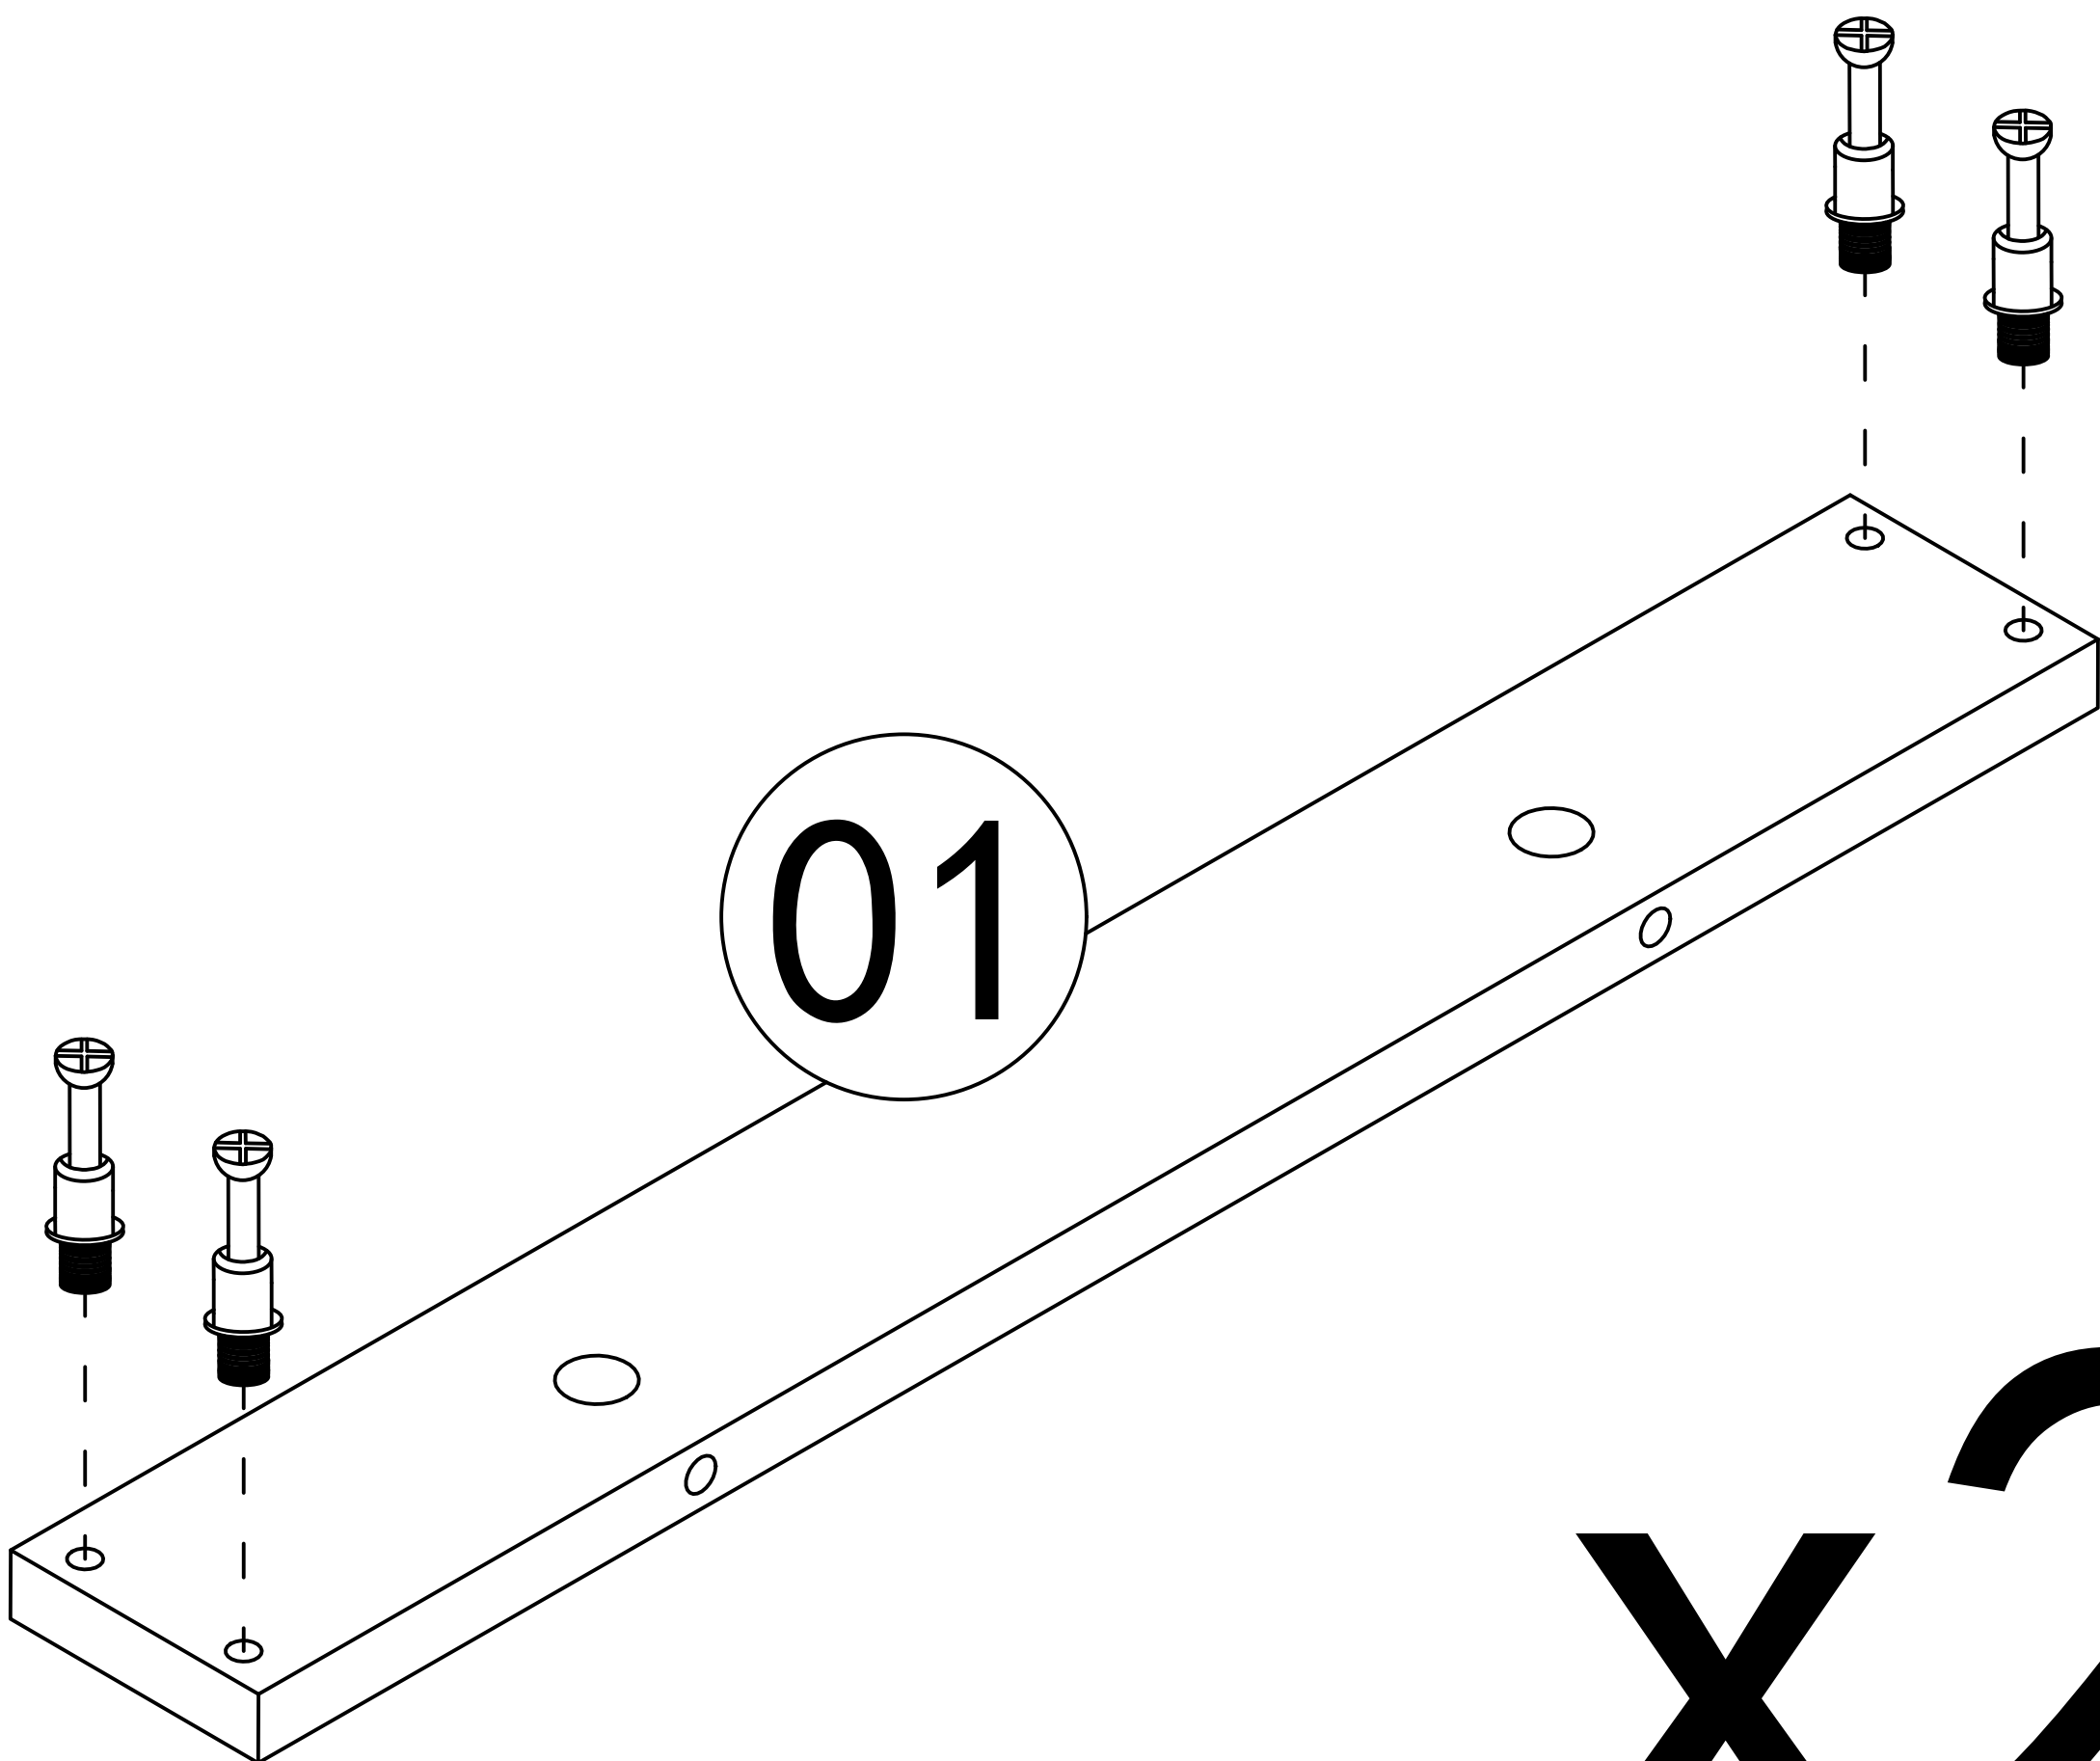


x2


4

Step 2

B




x8

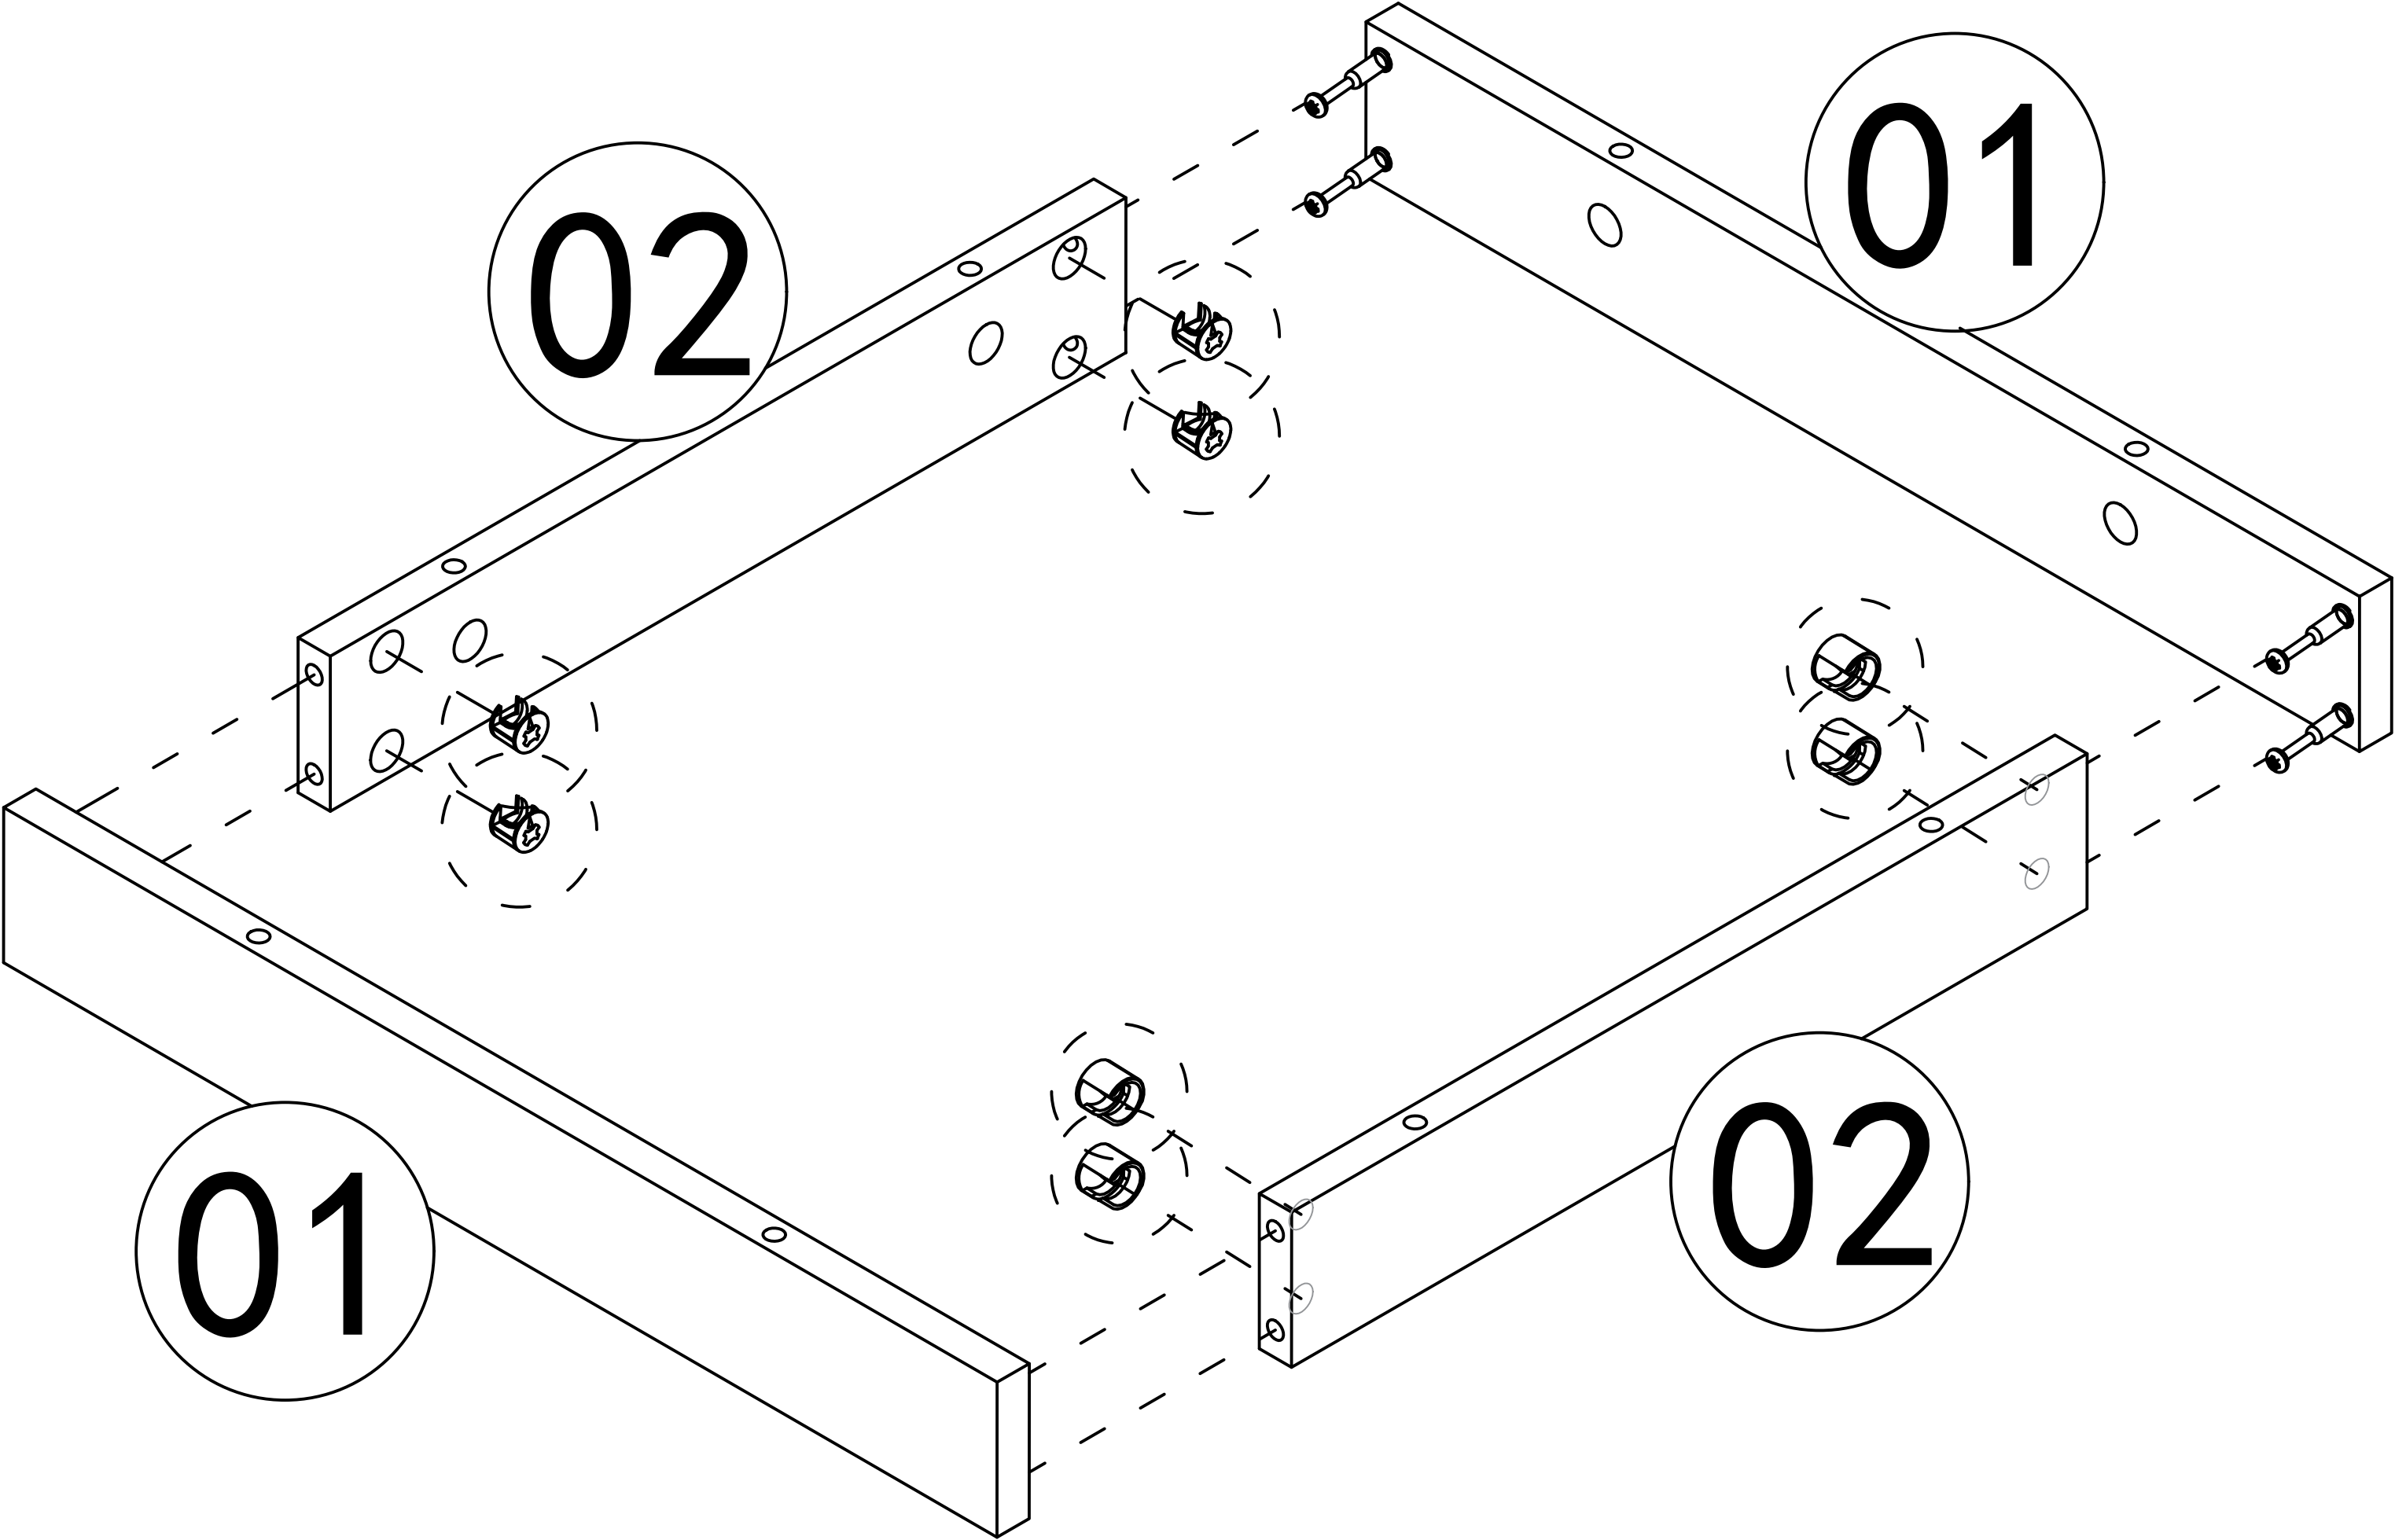


Step 3

A

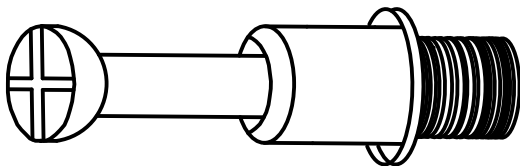


x8

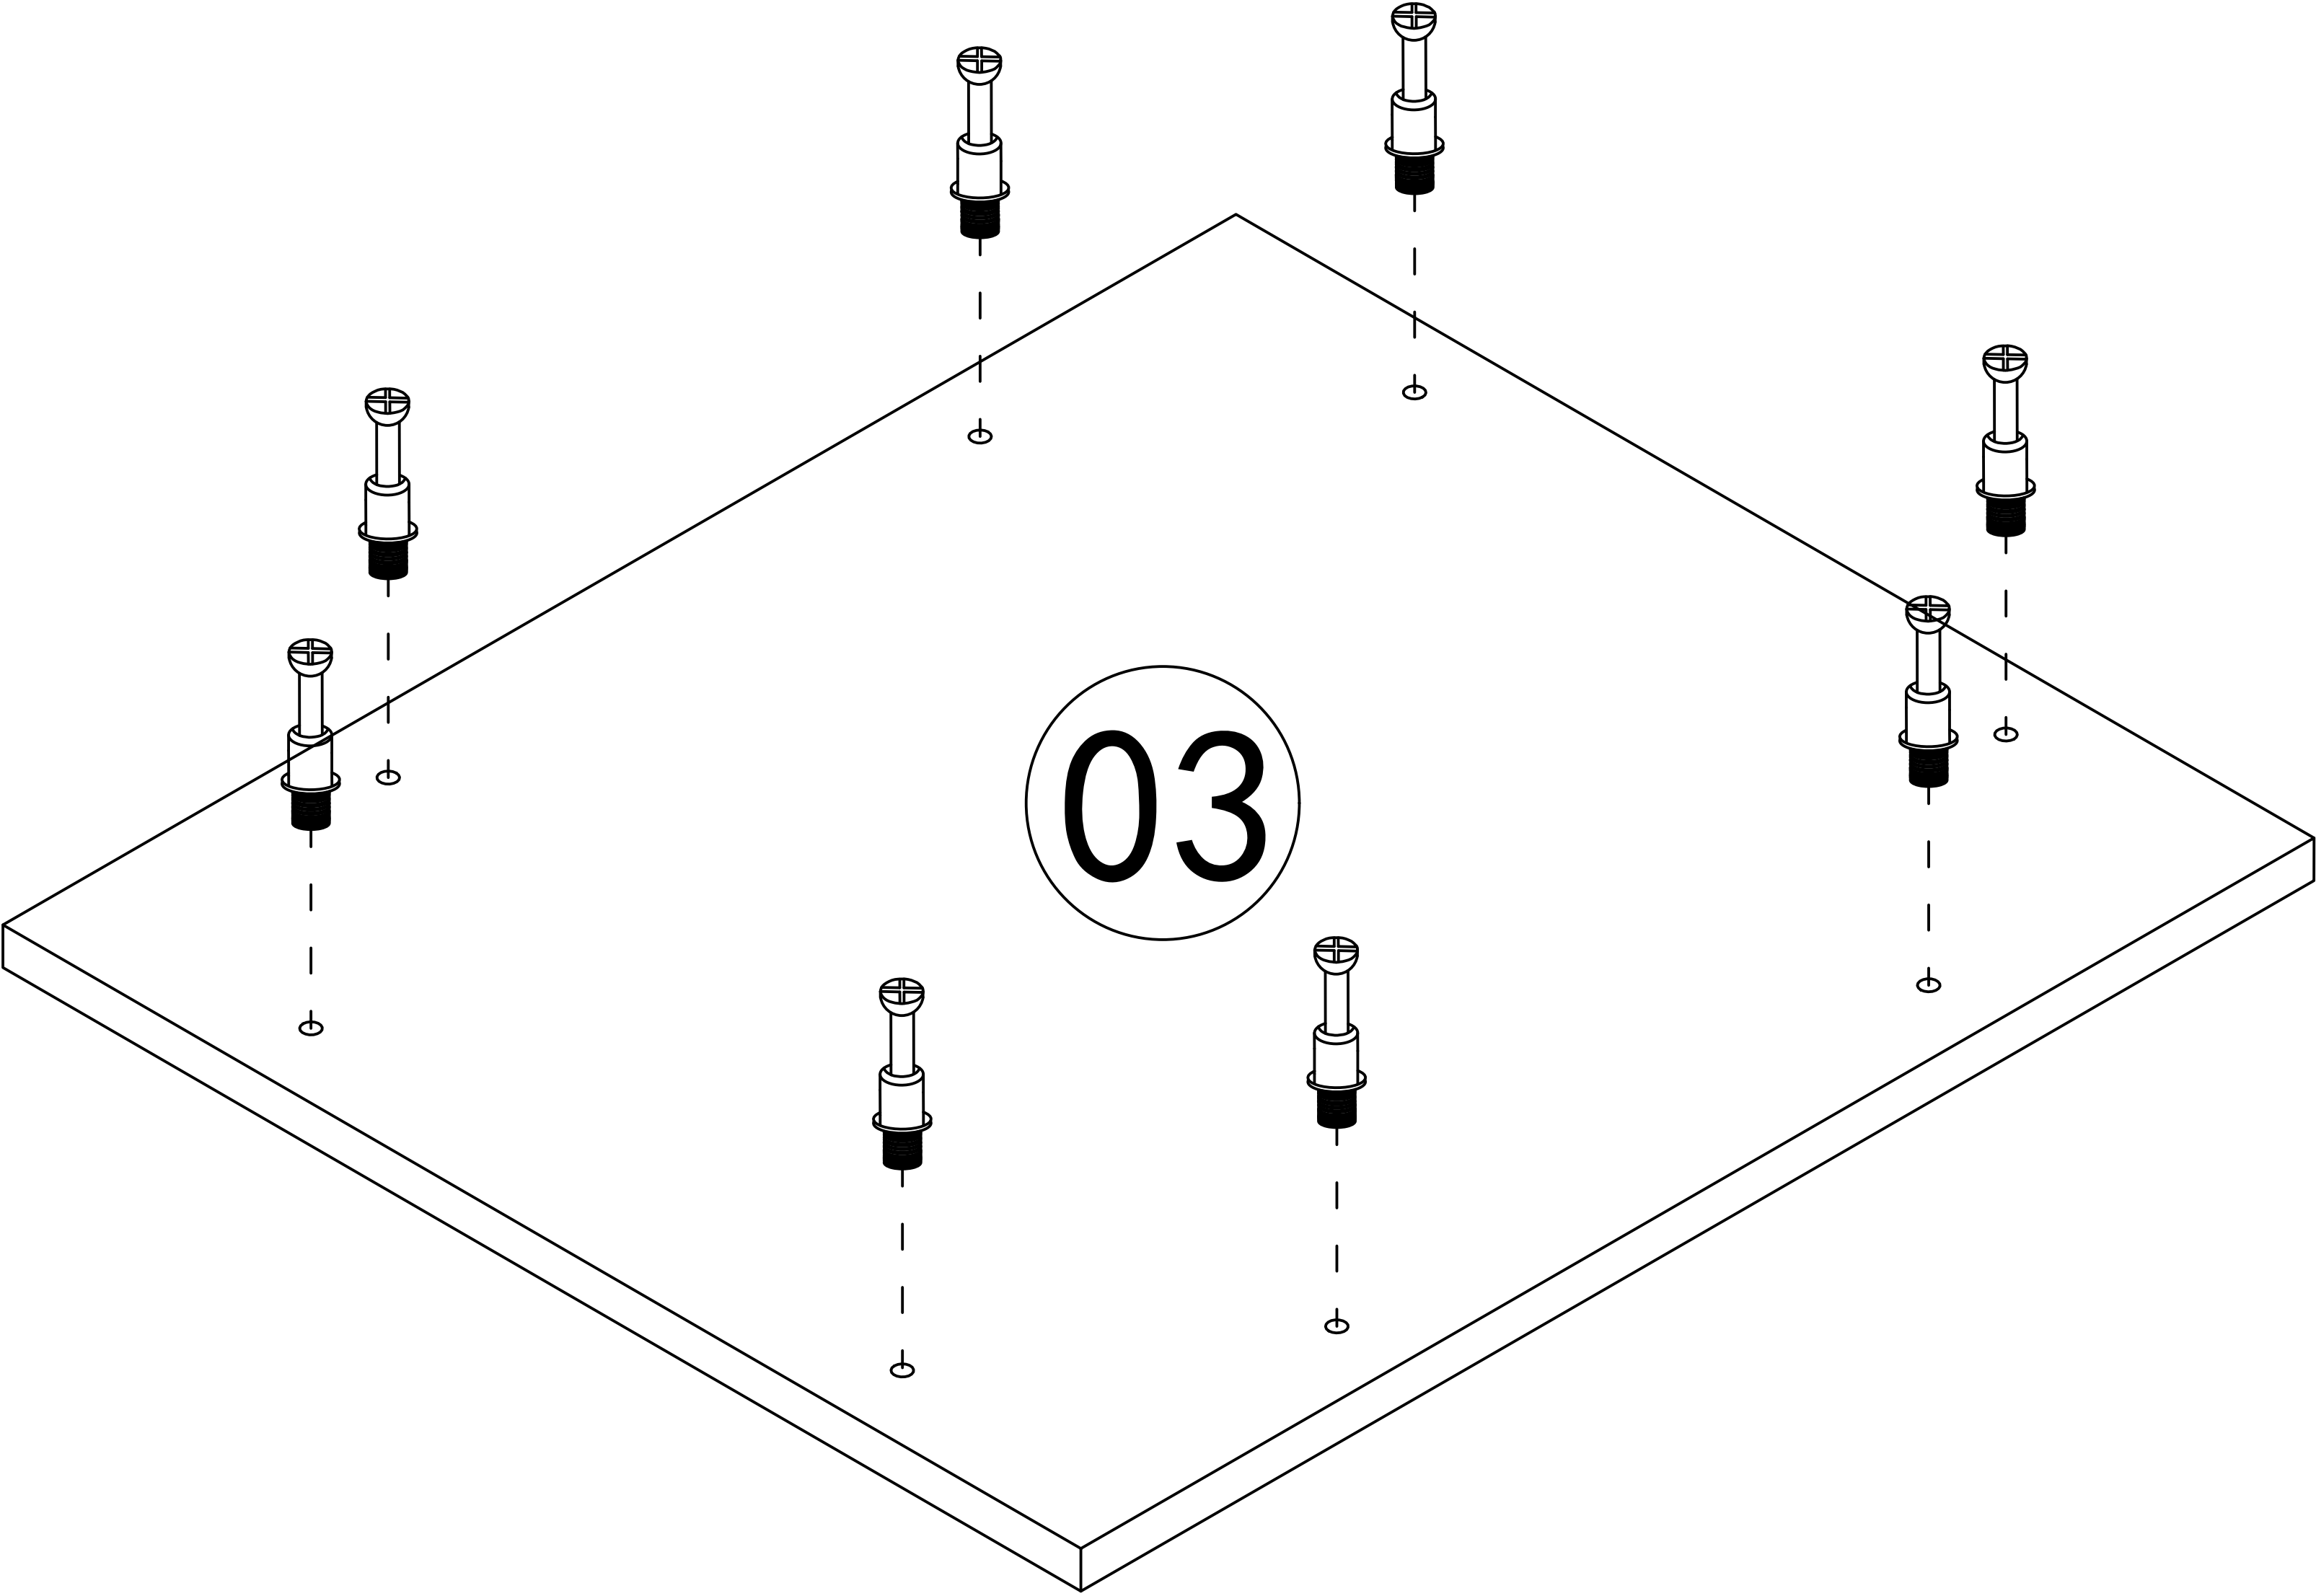


Step 4

B




x8

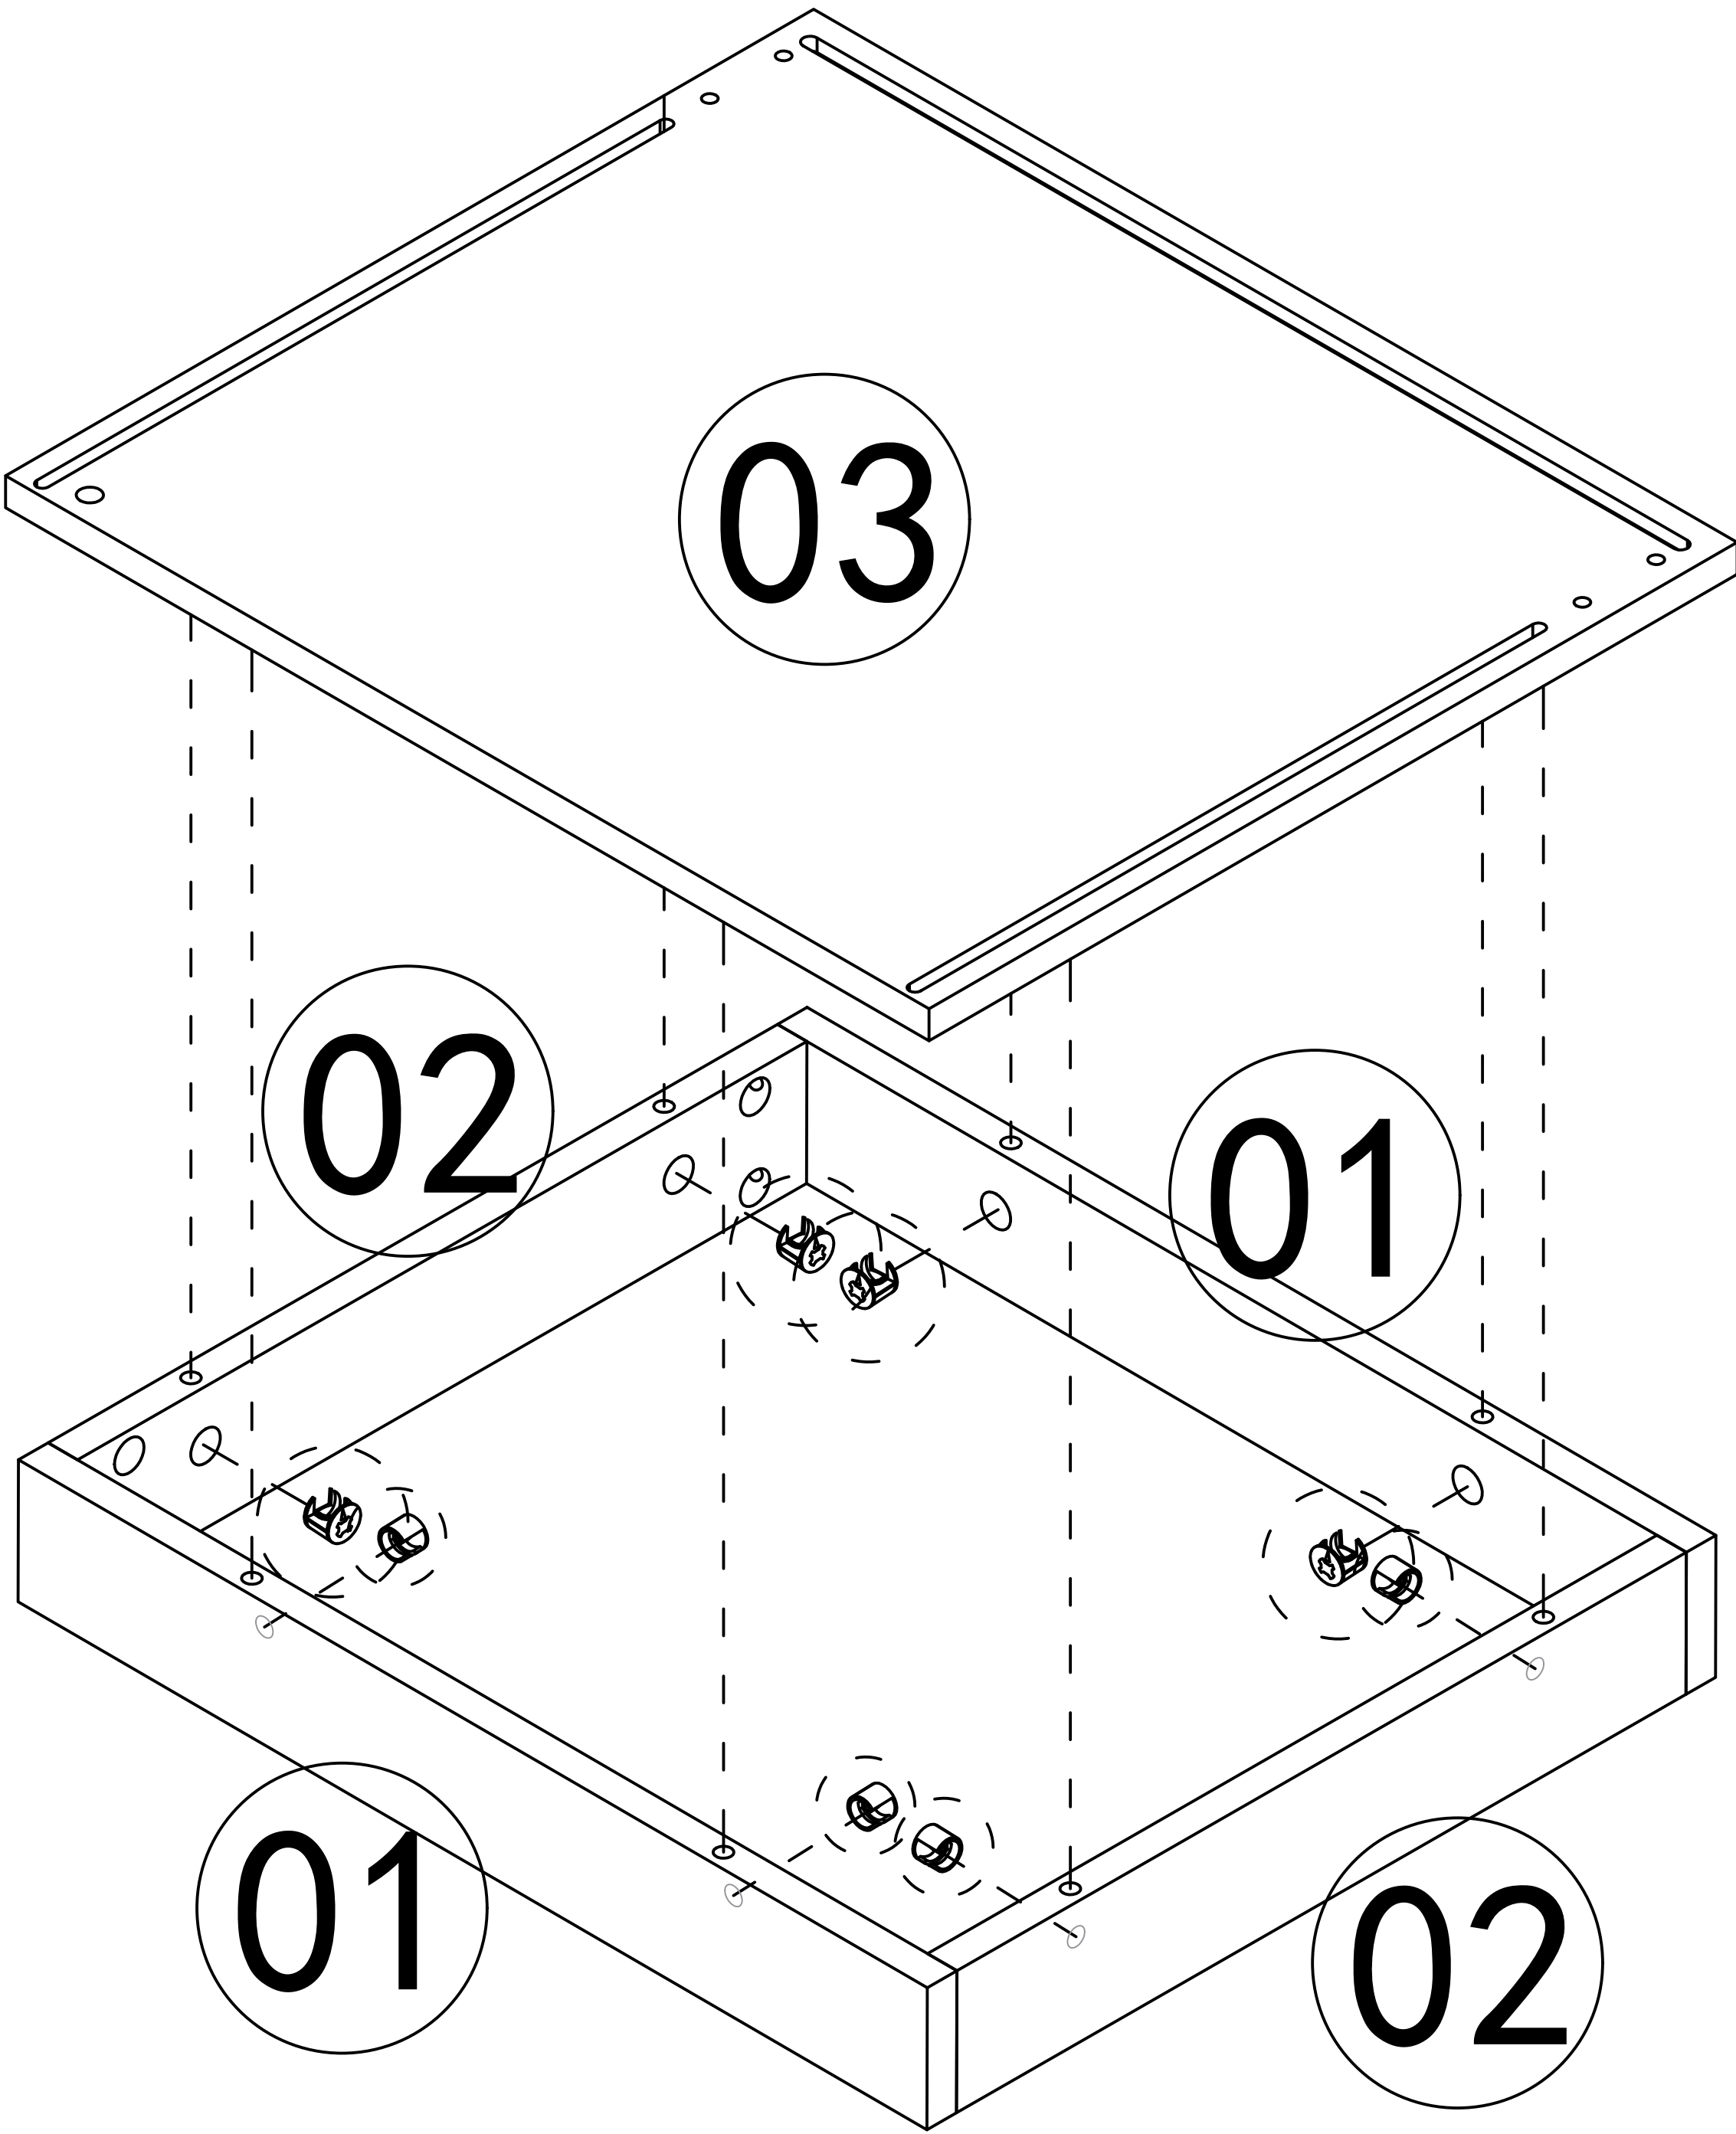


Step 5



C

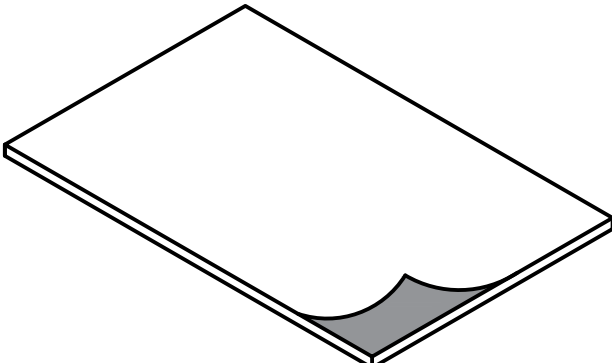



x4

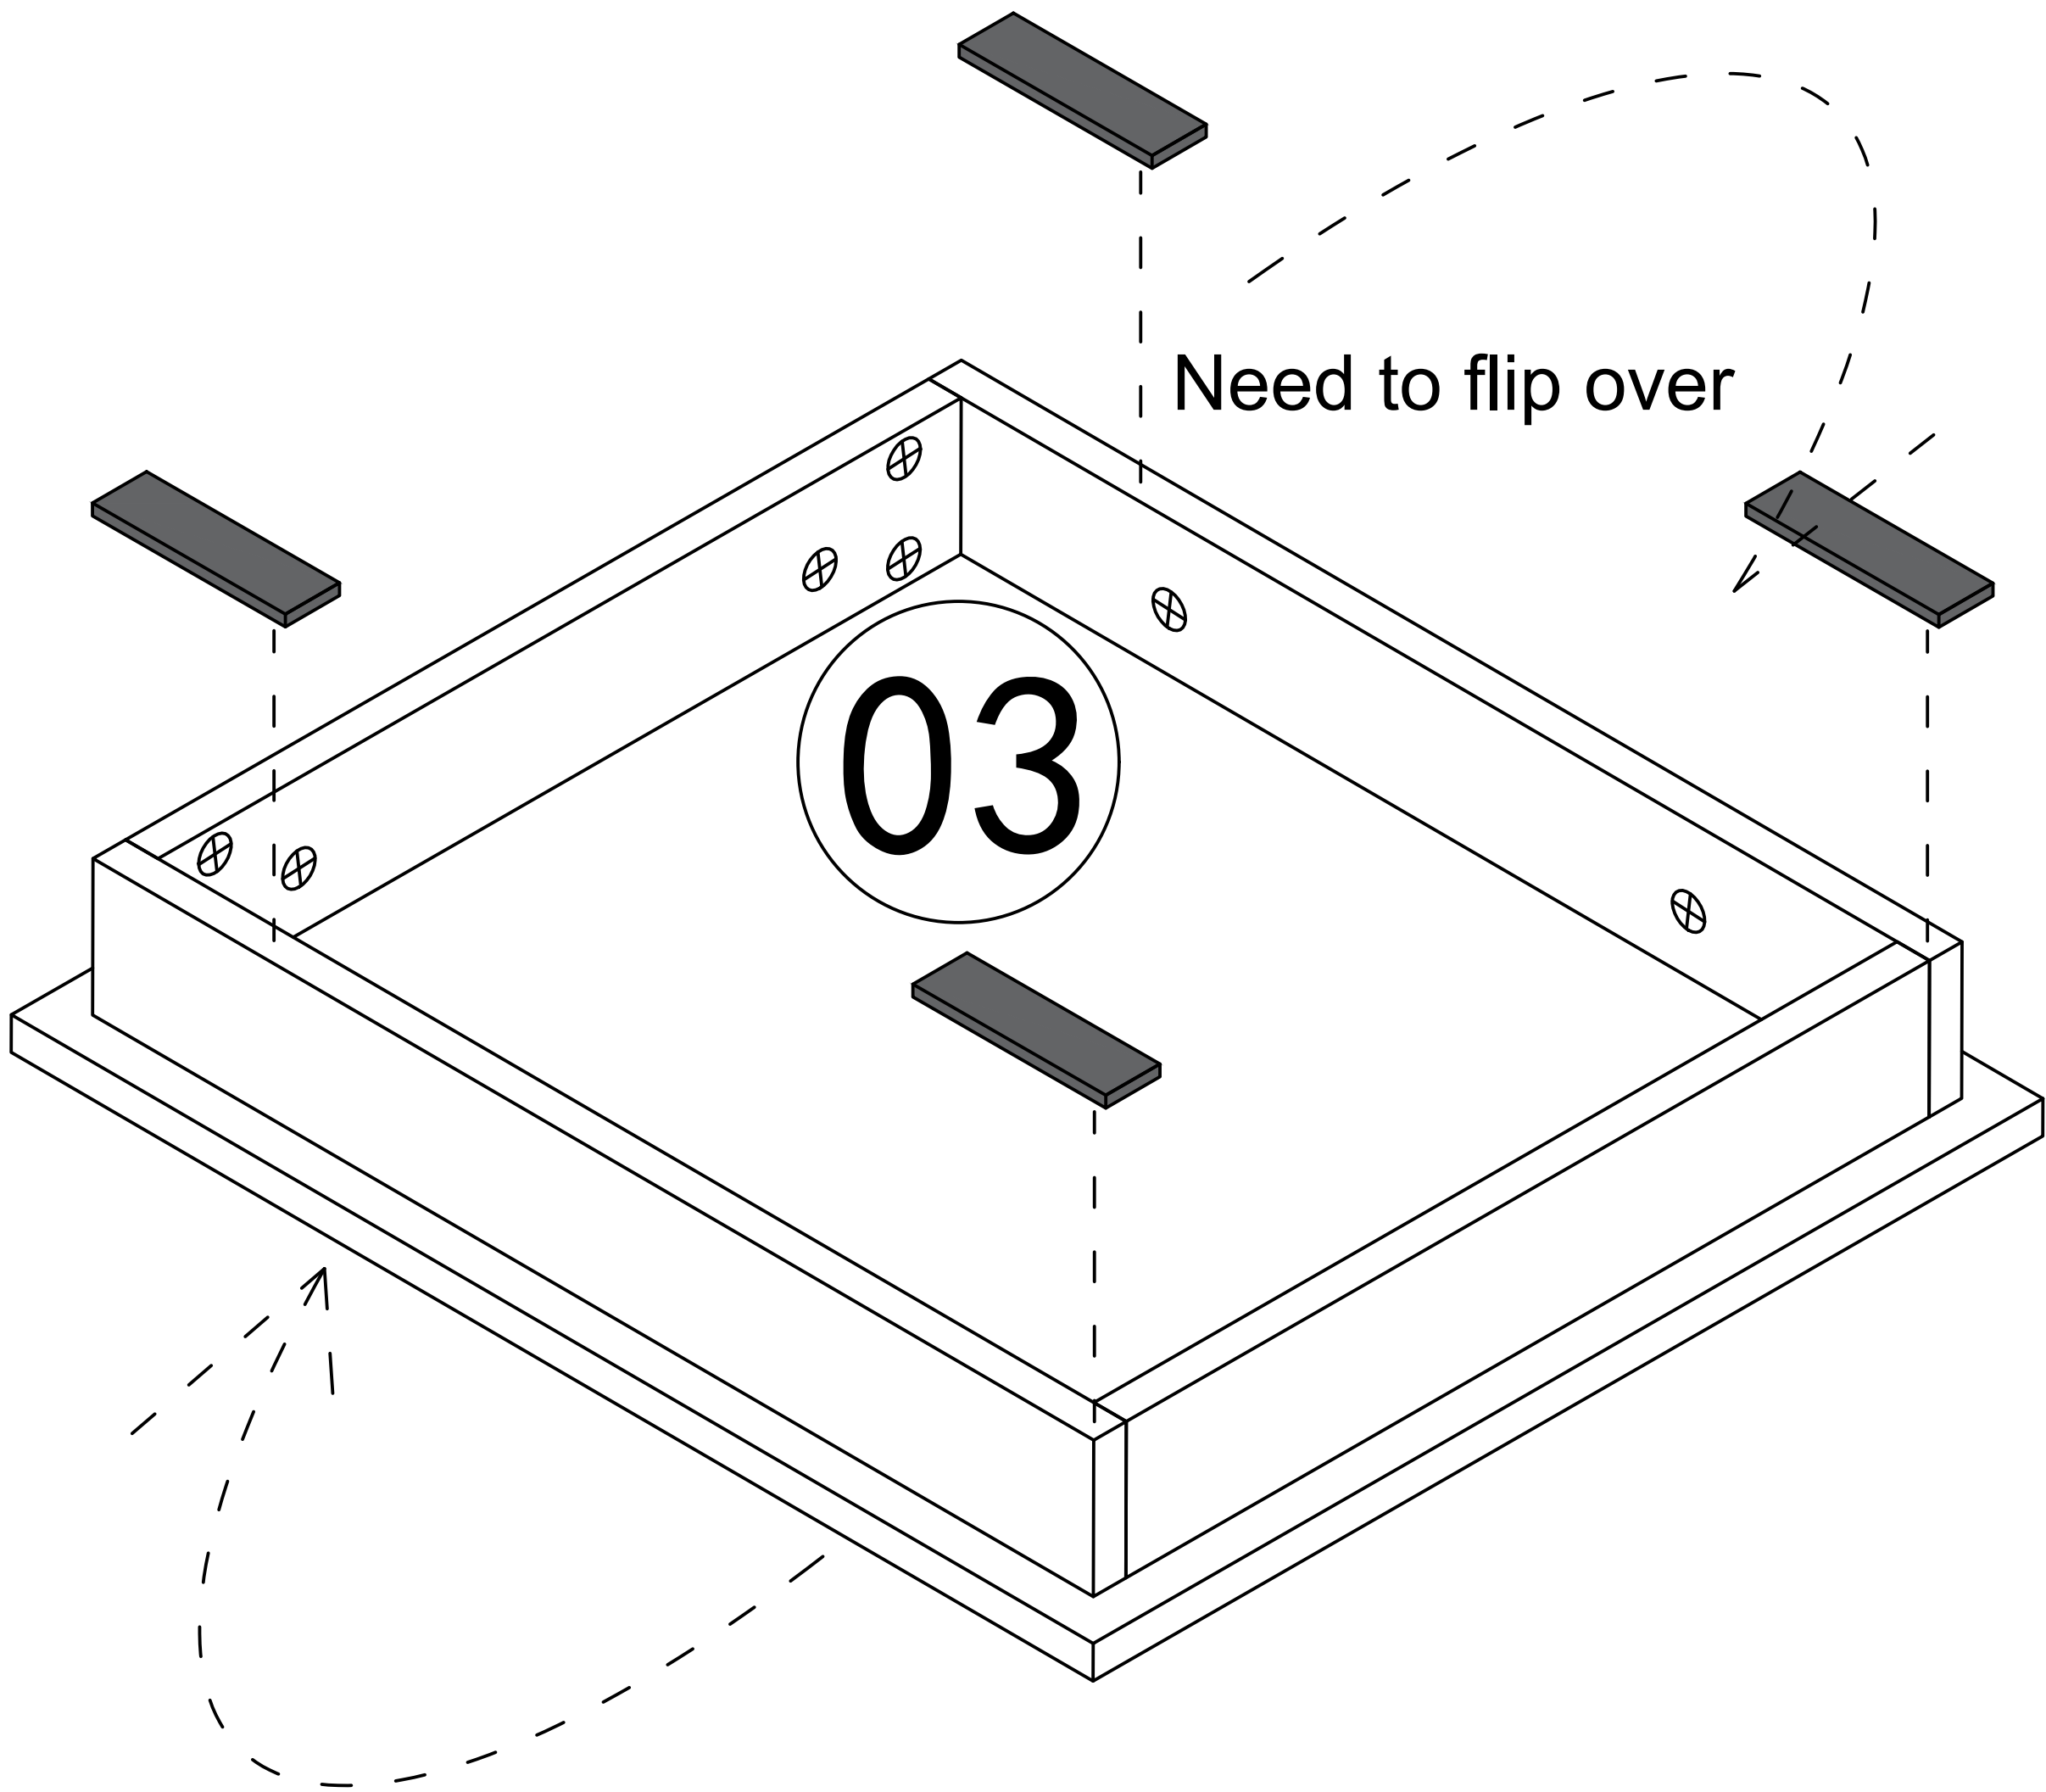



Step 6

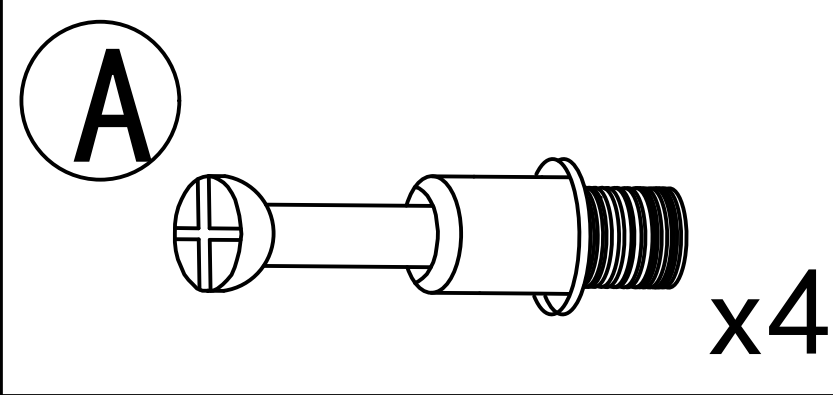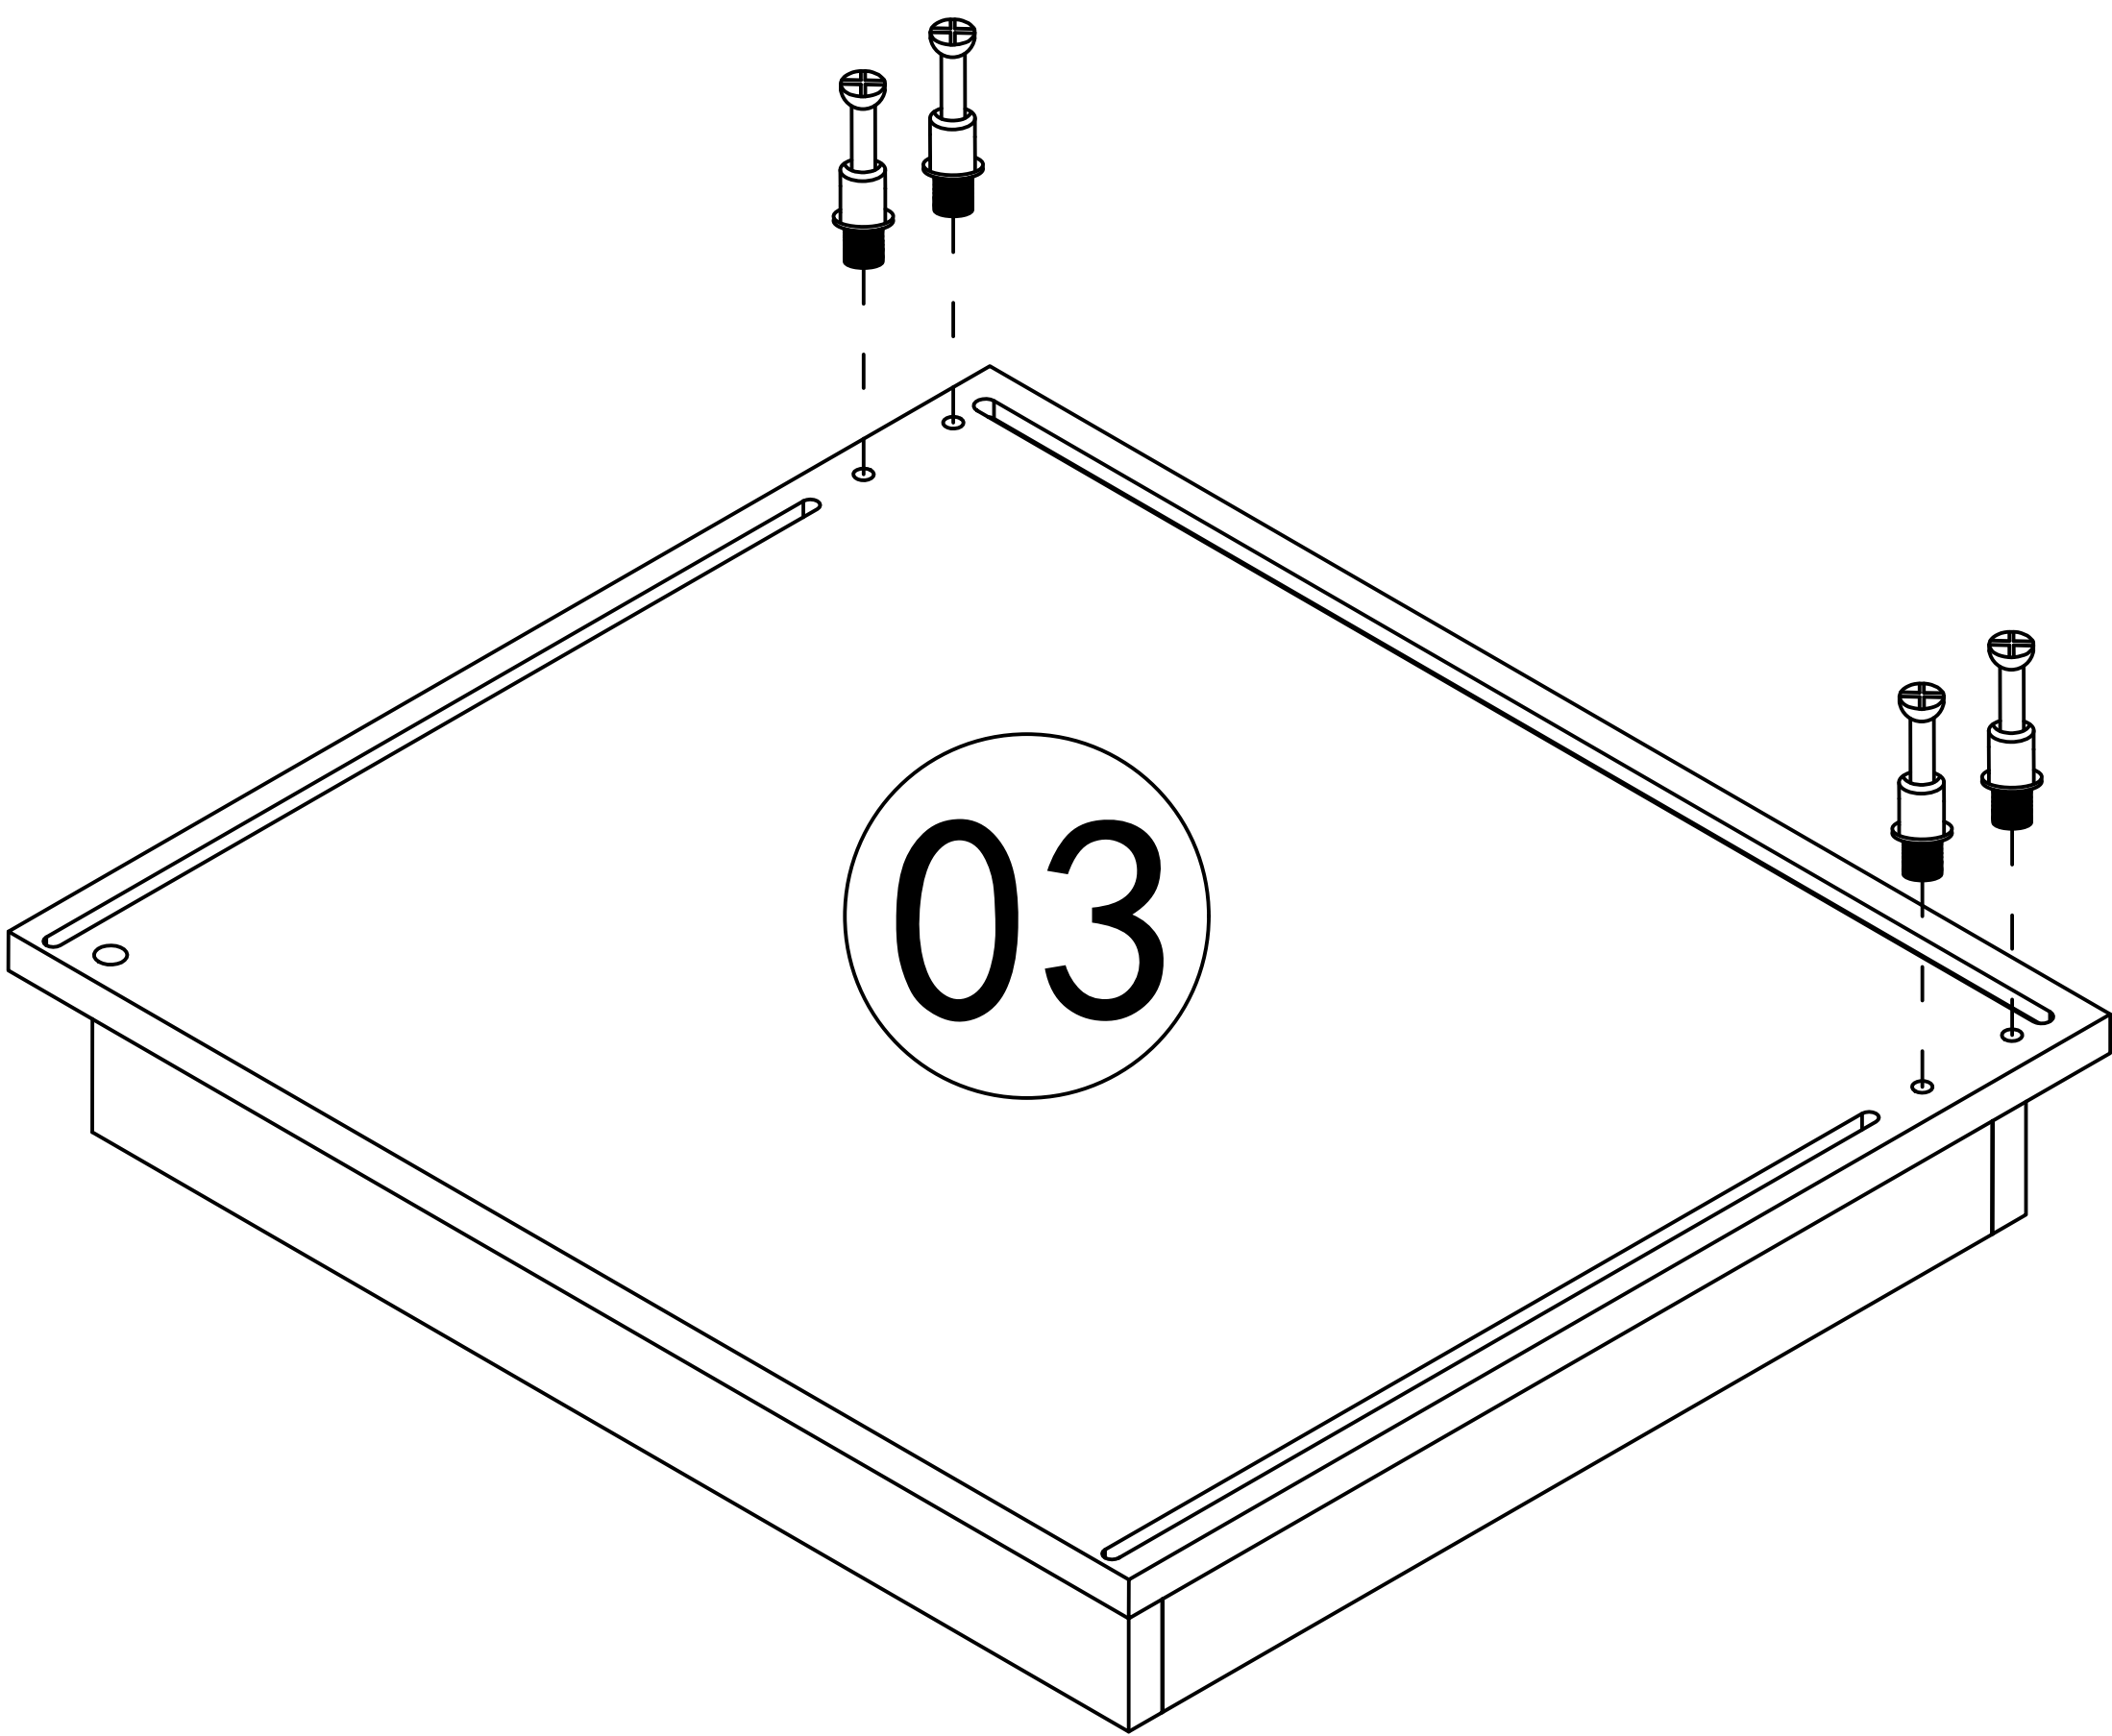

Step 7

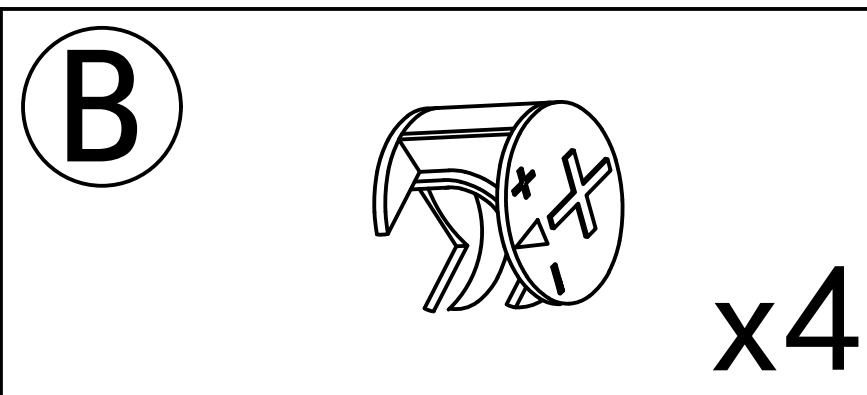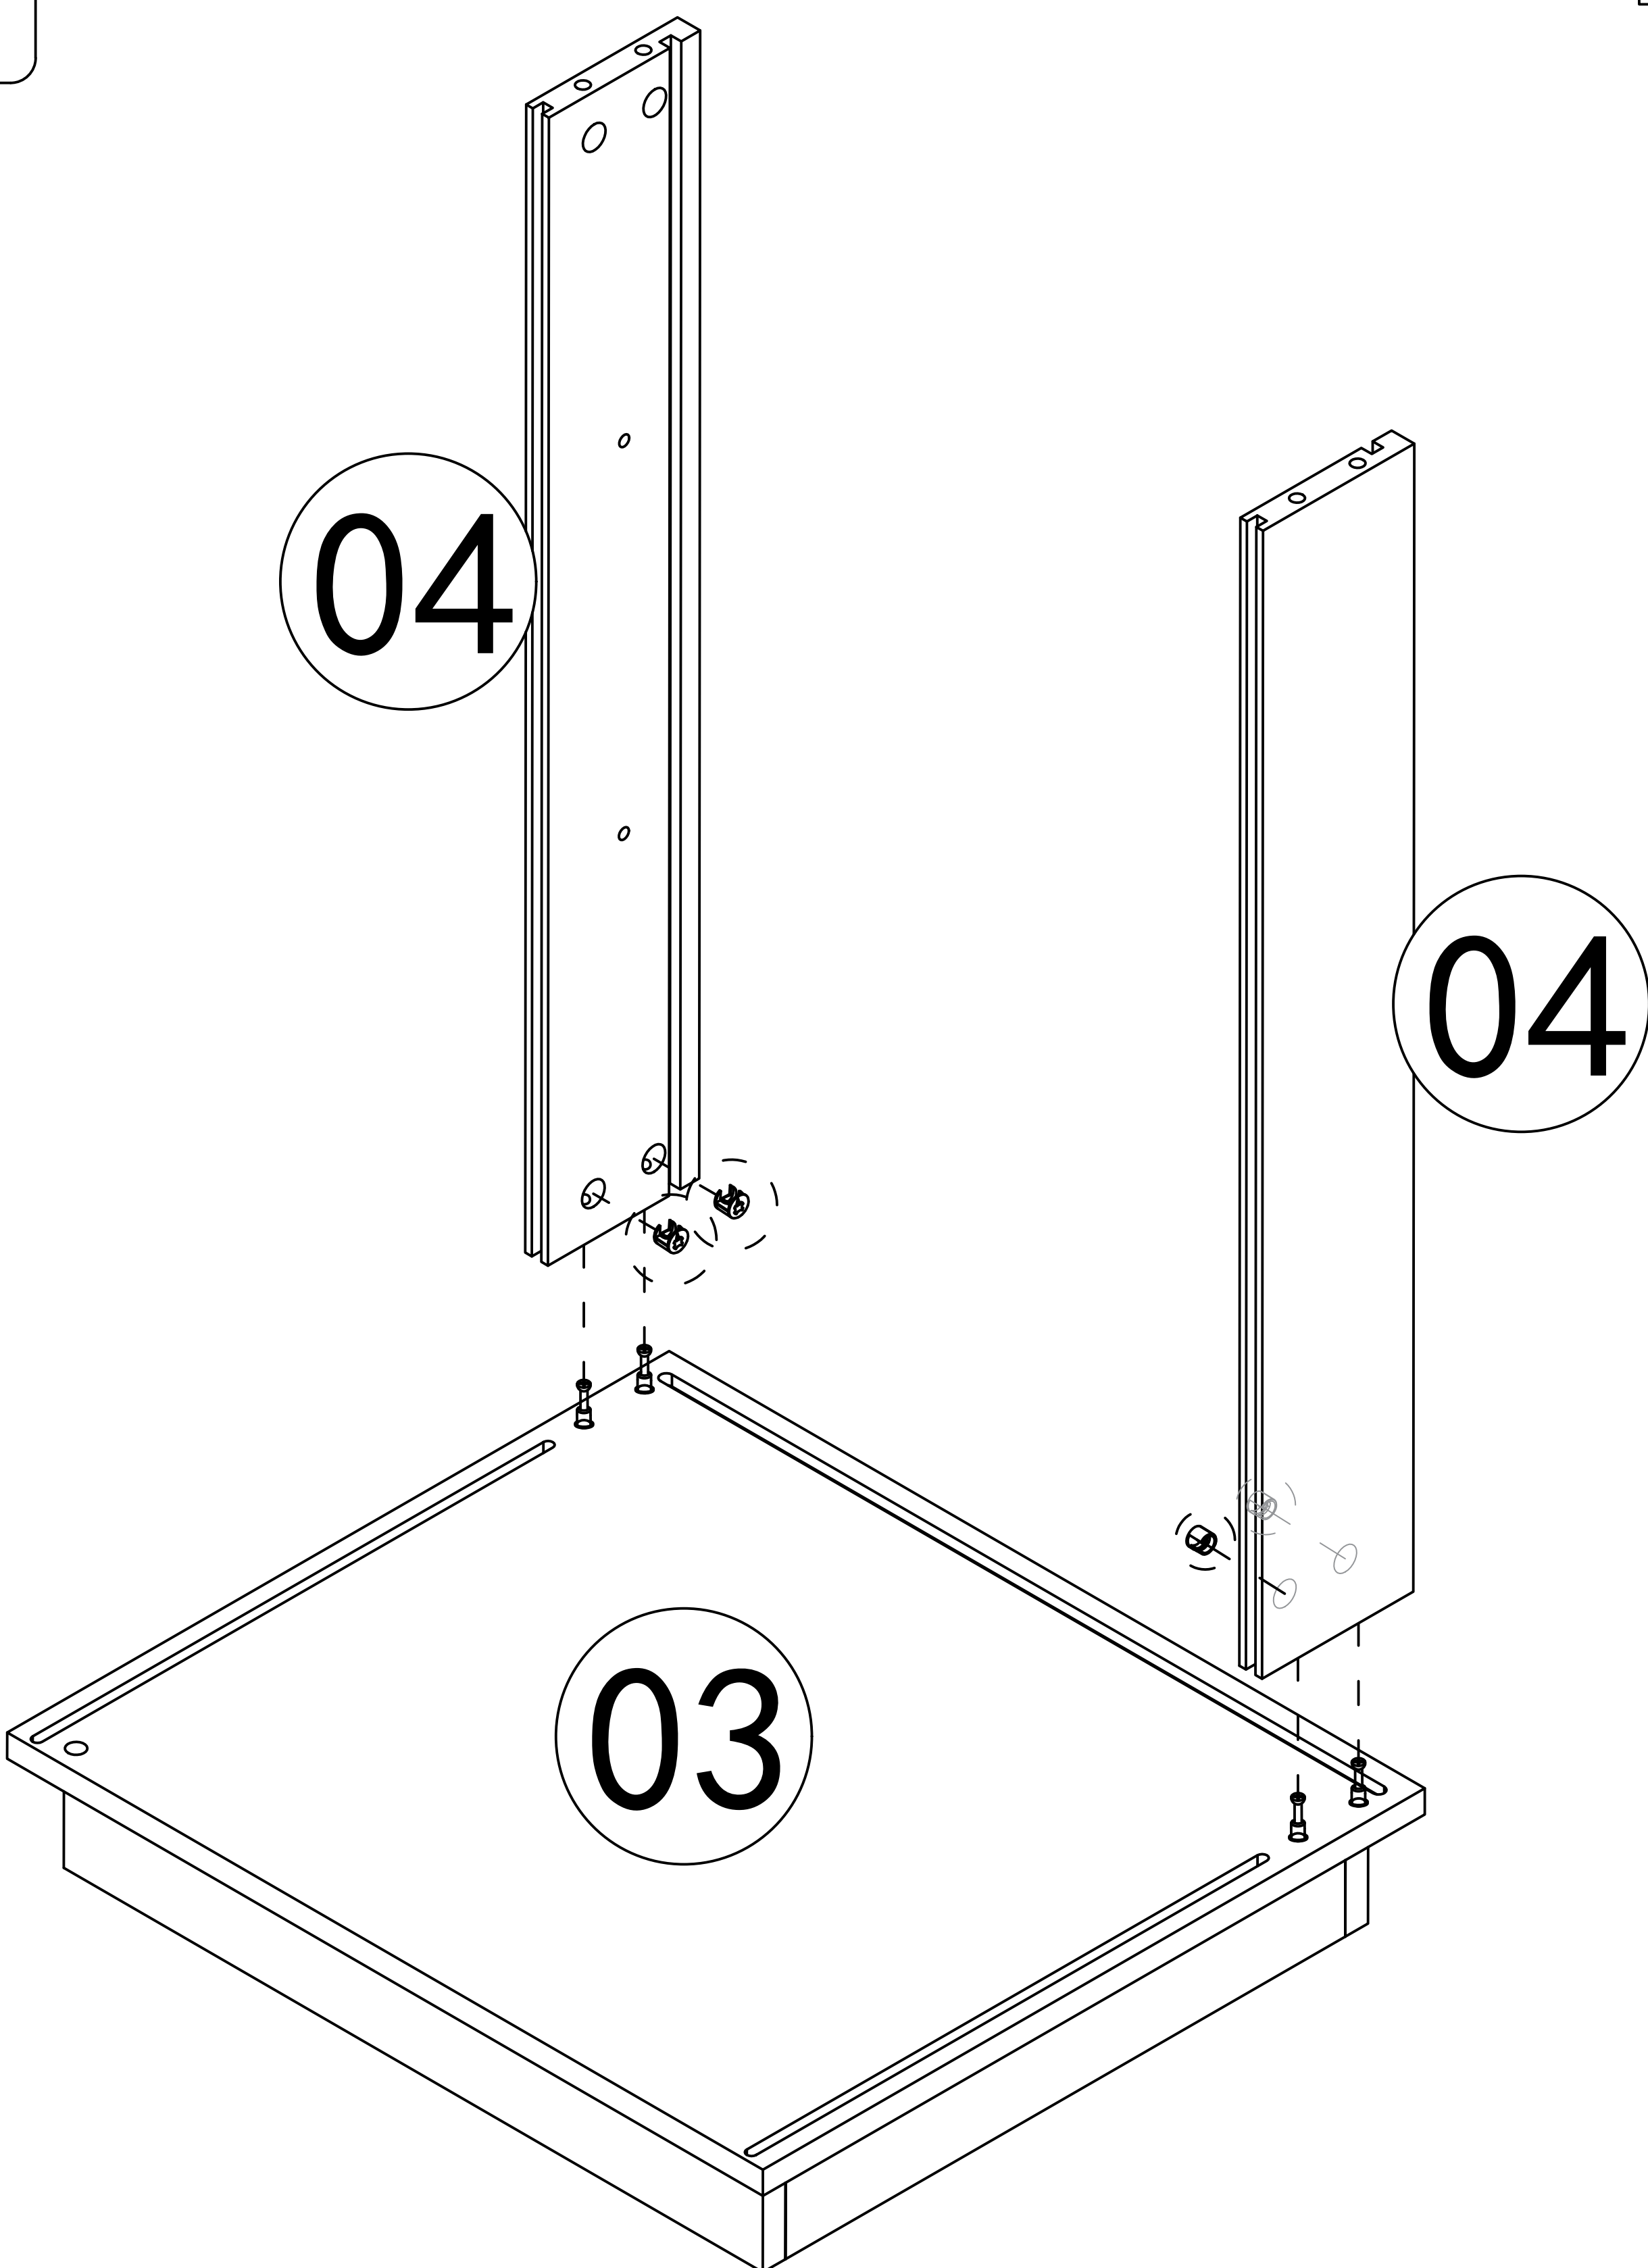


Step 8

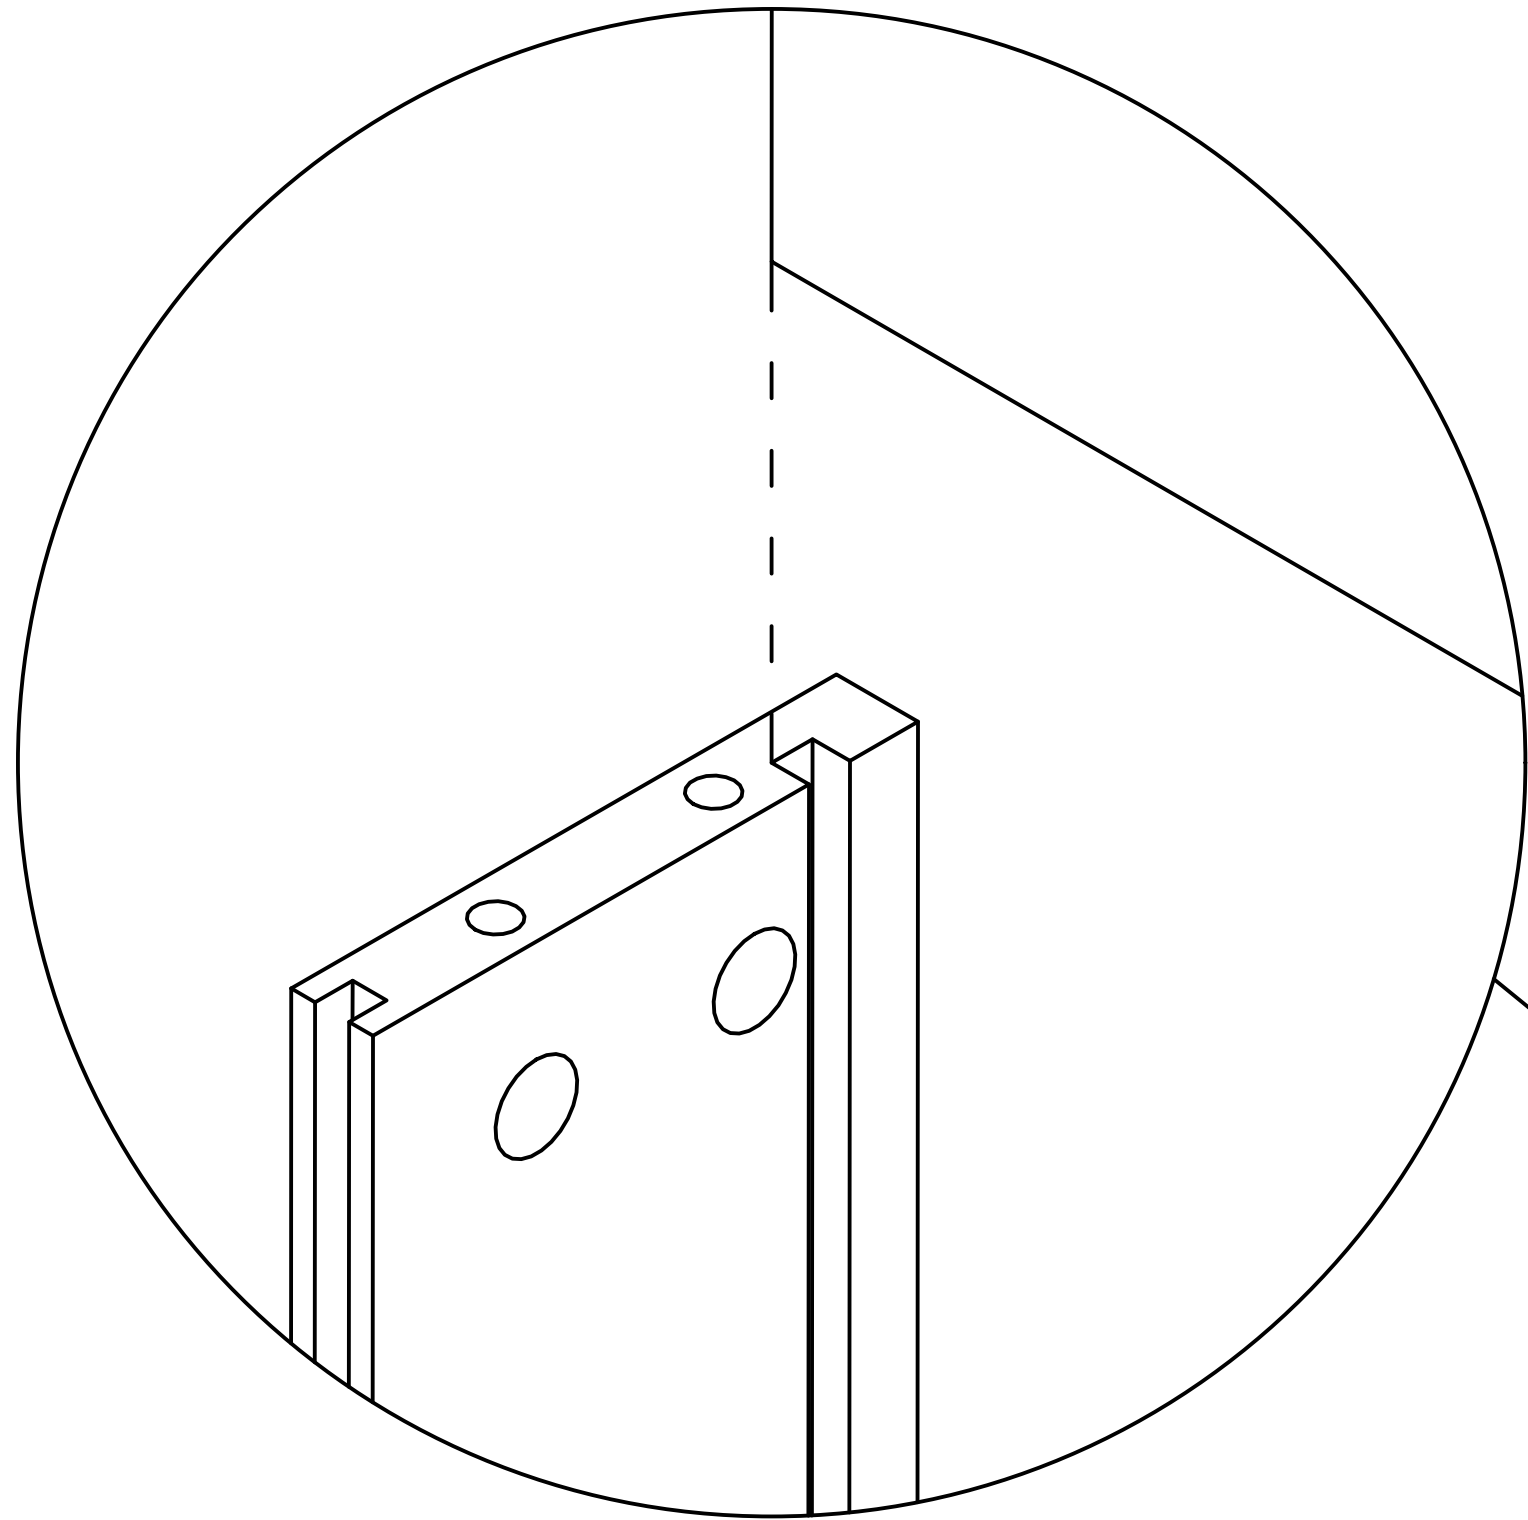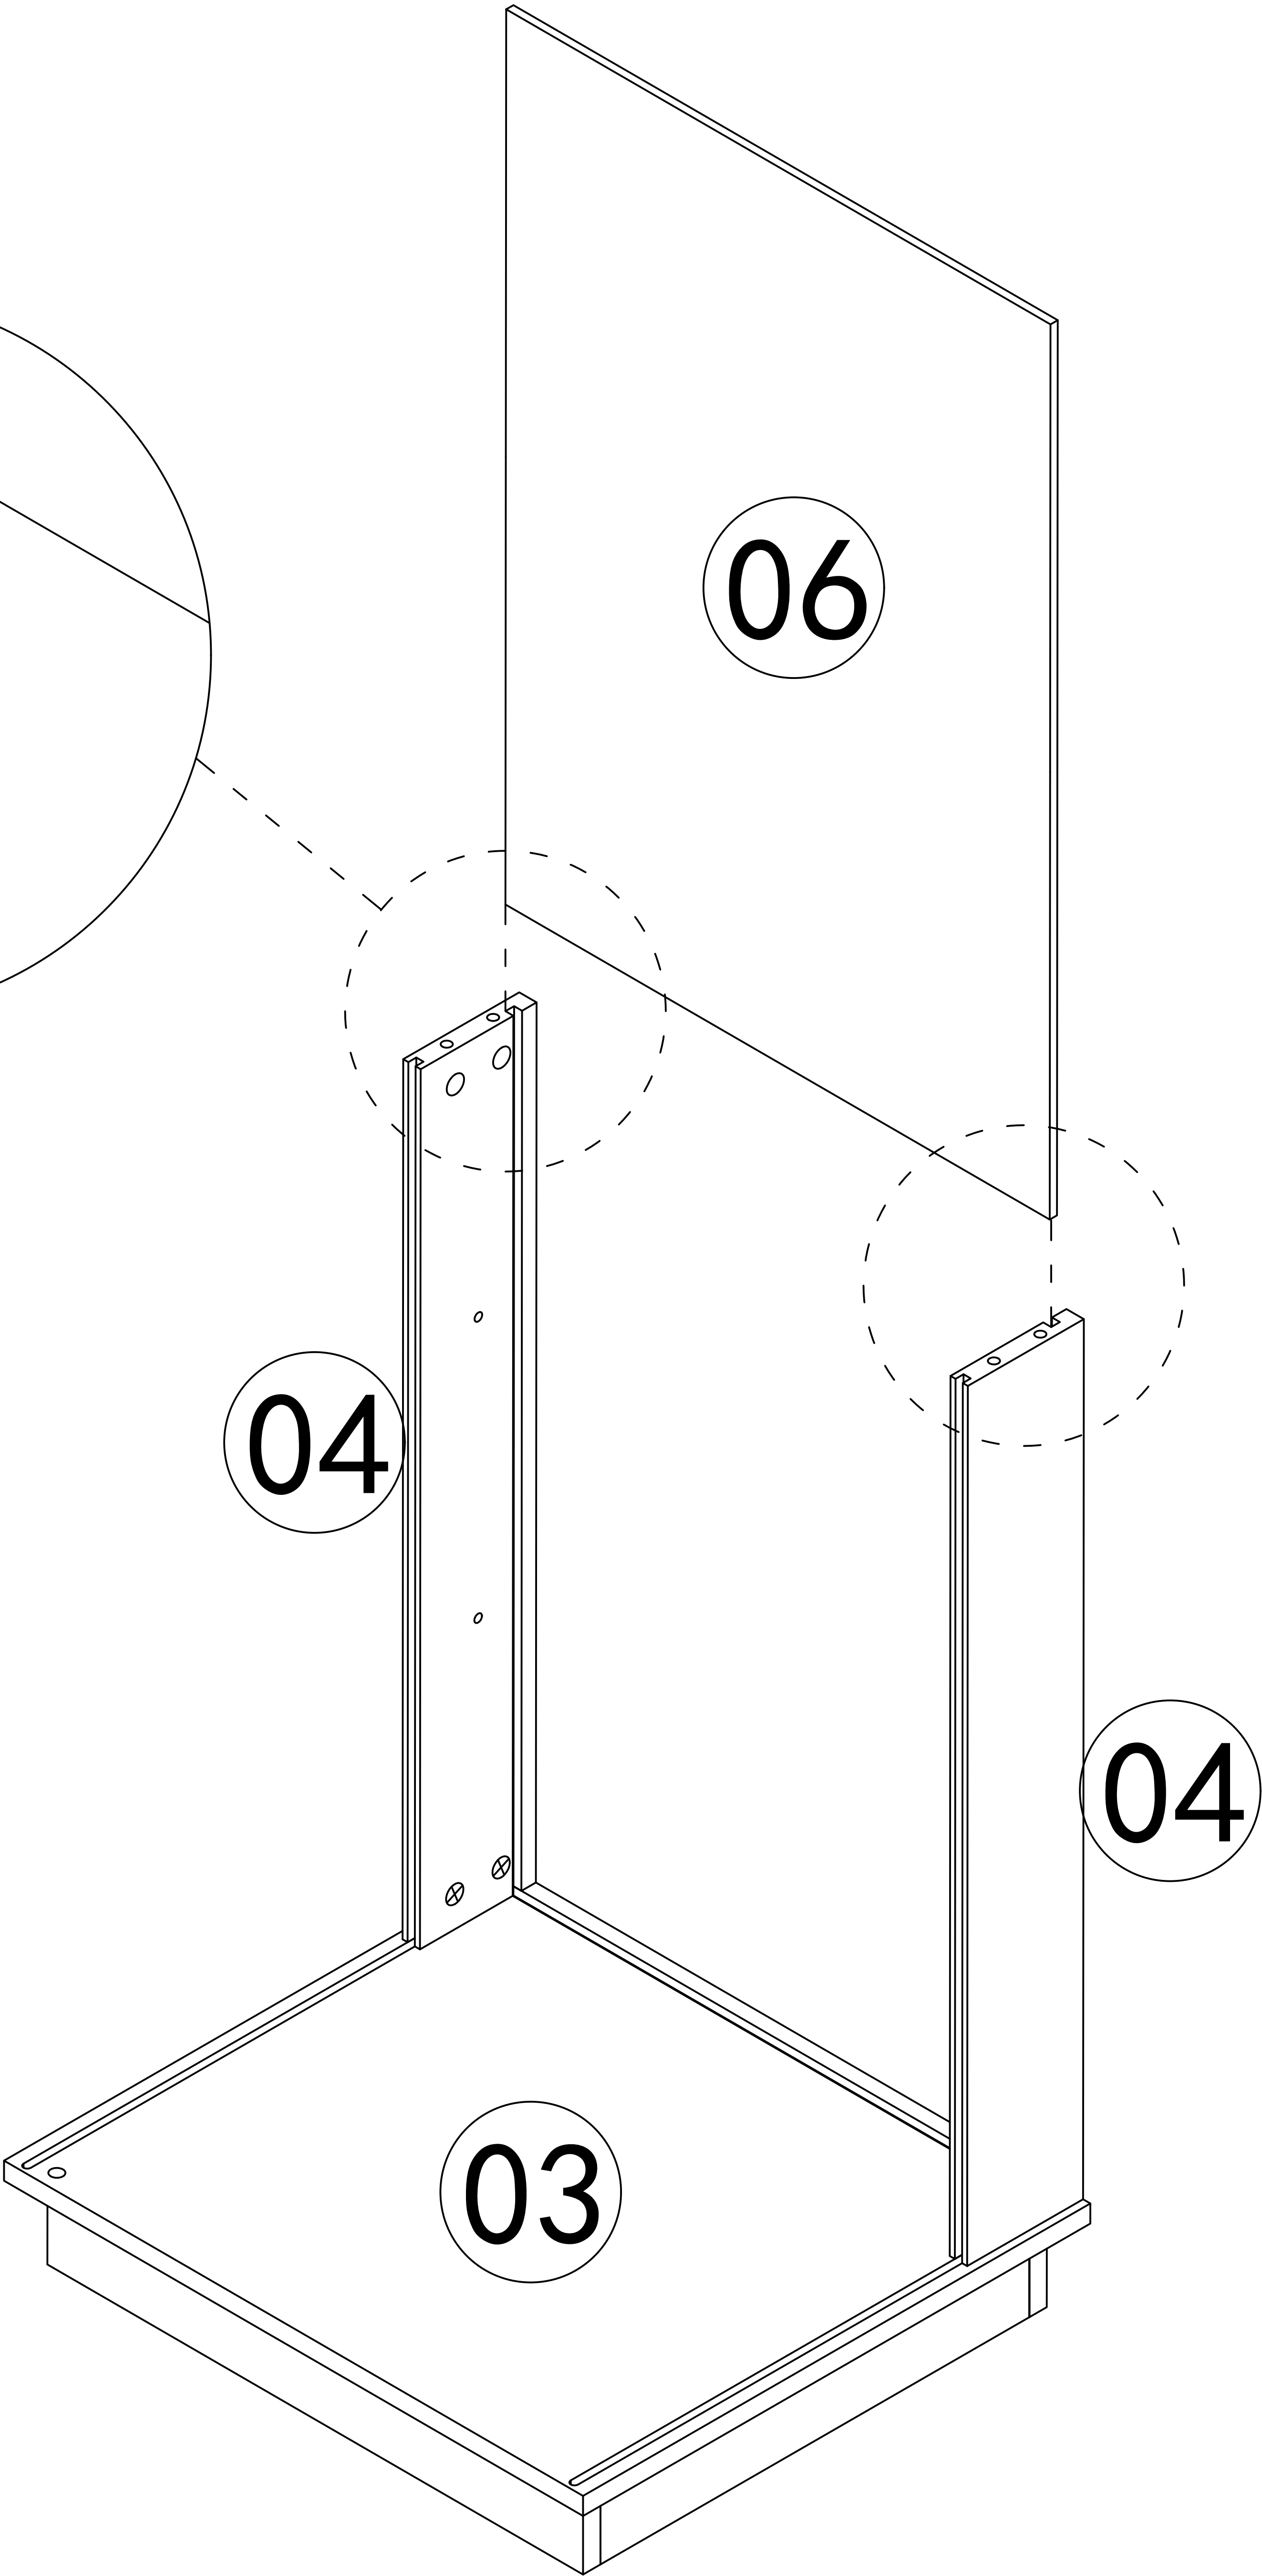





Step 9

H


x8



x16


x8

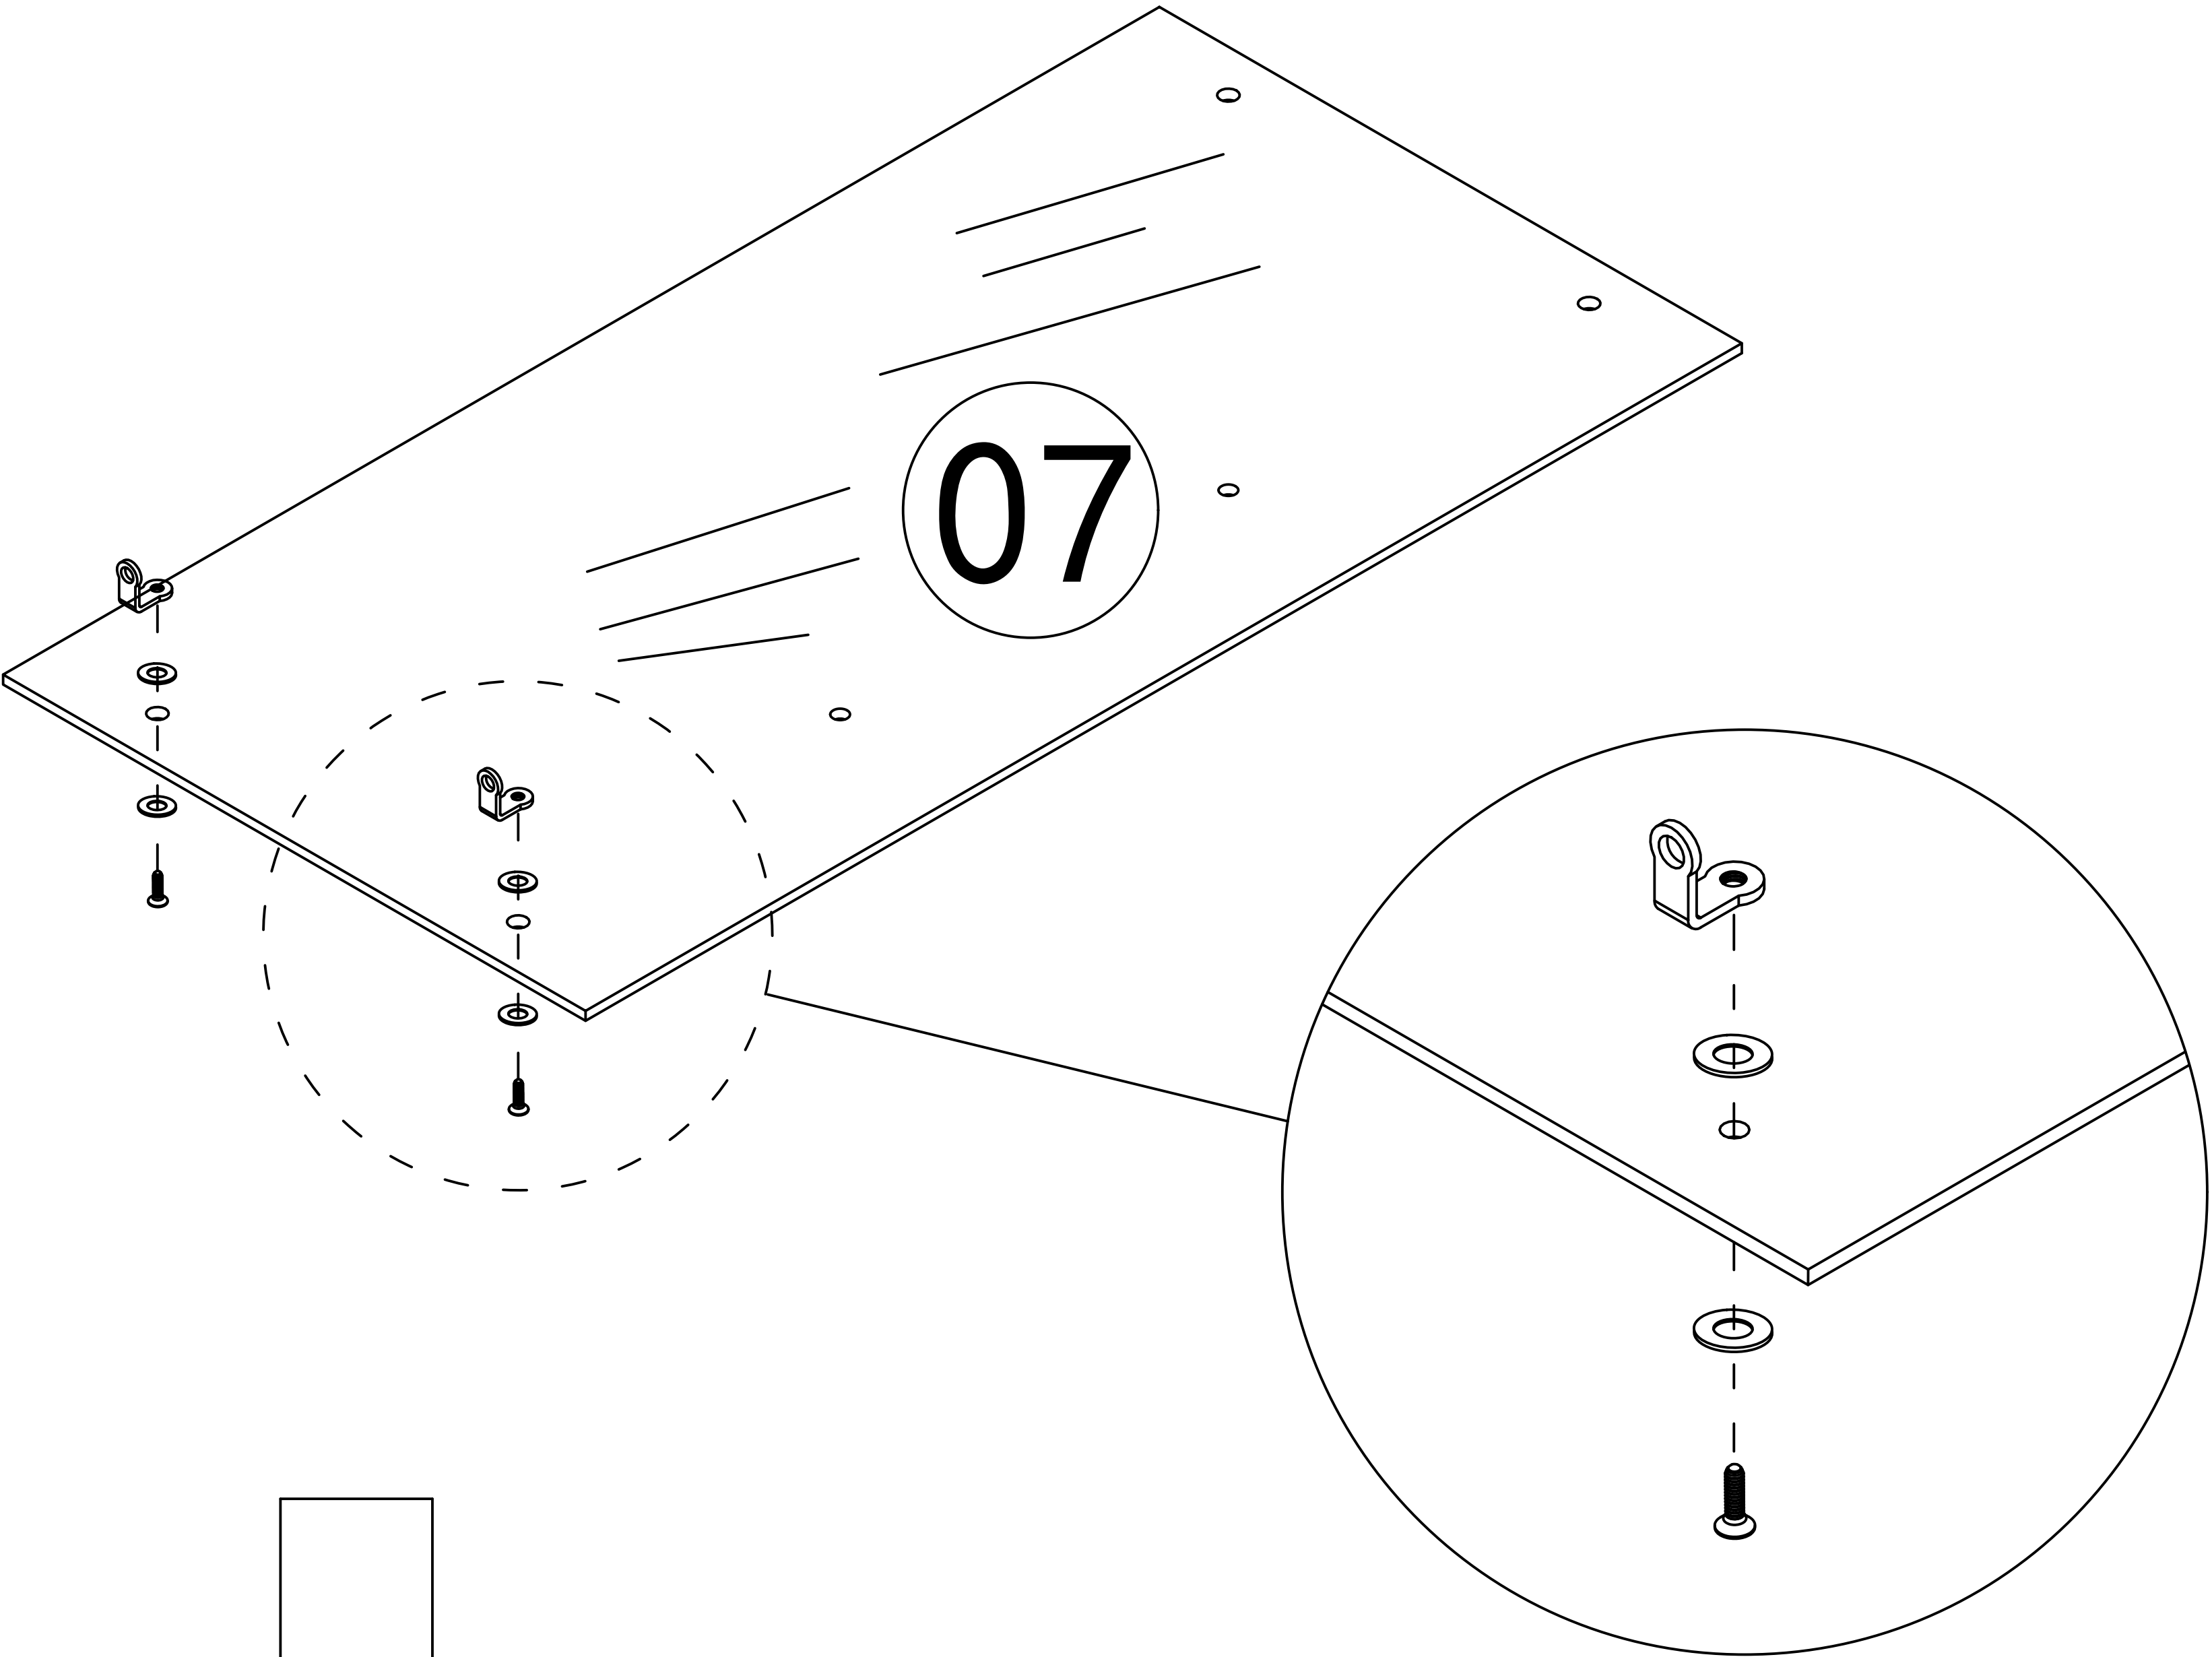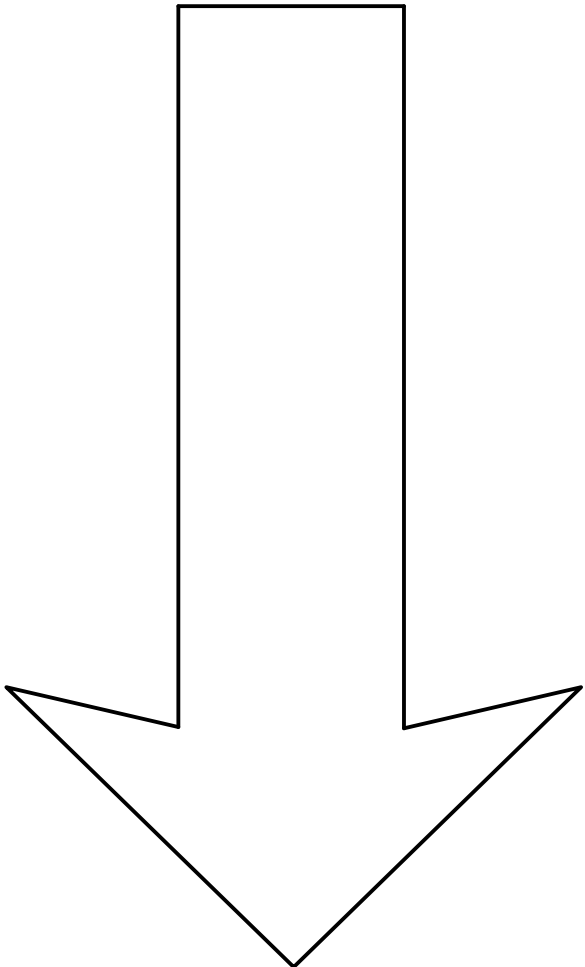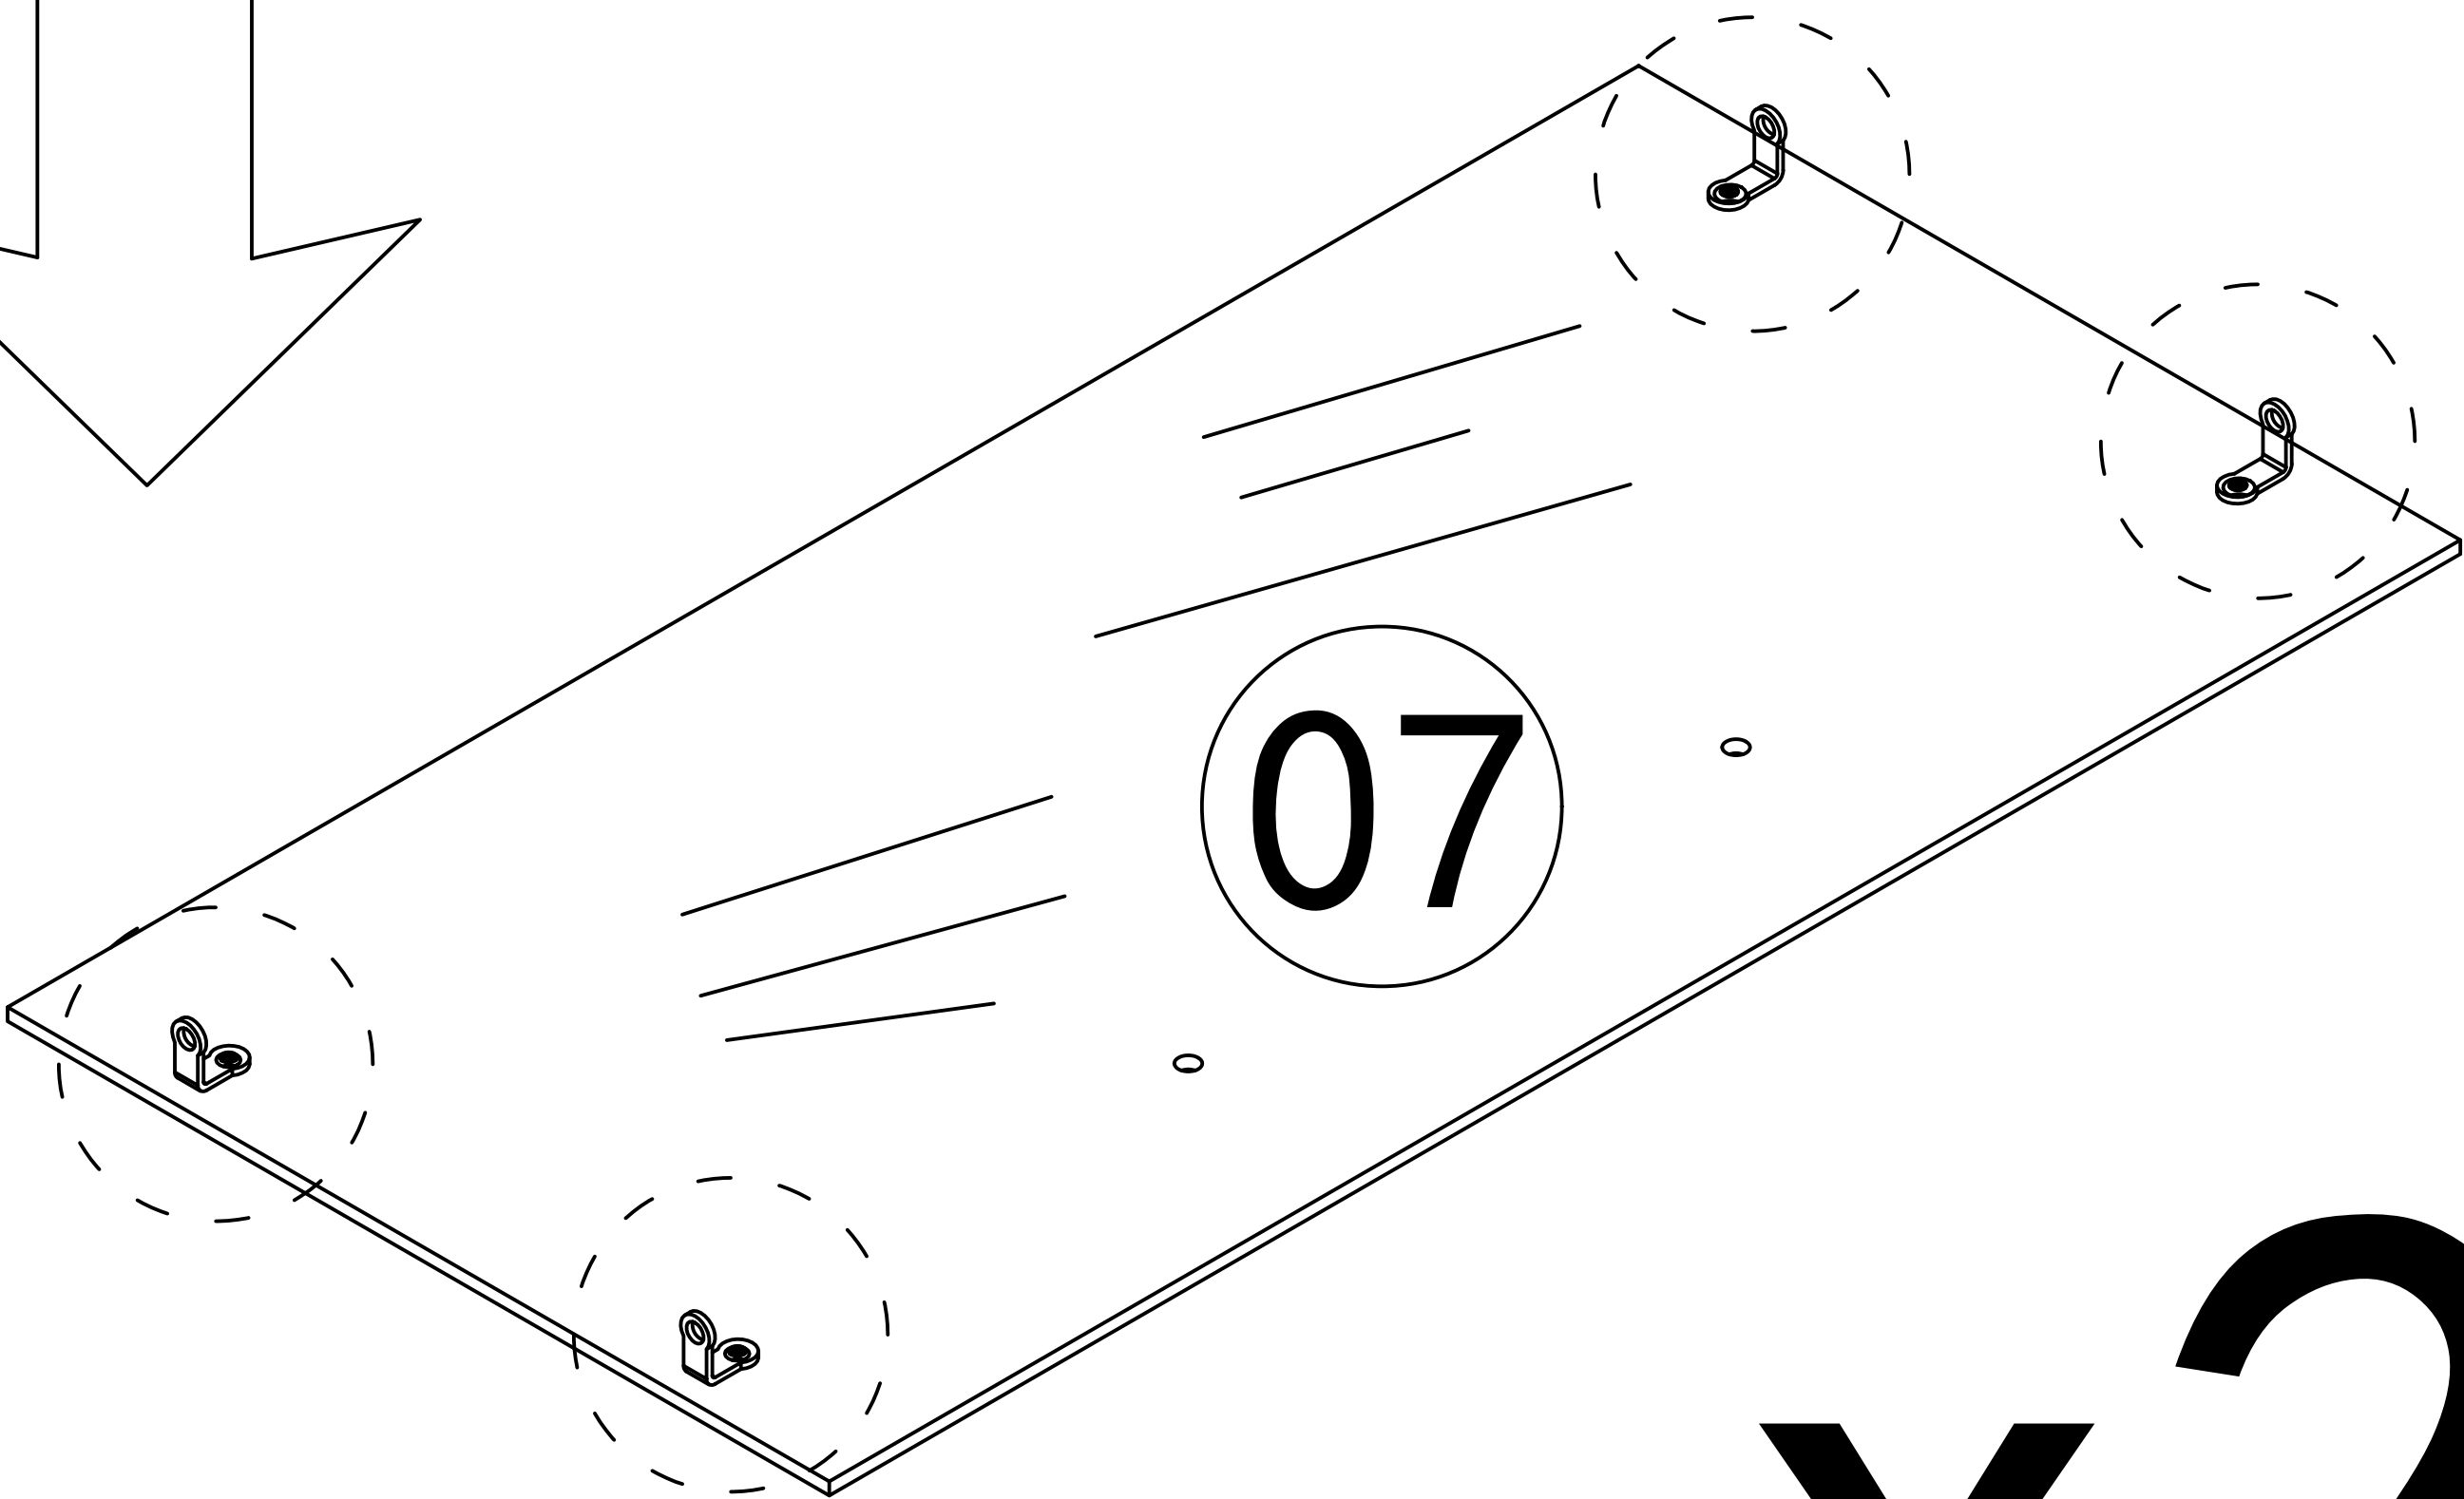


x2

Install this hole

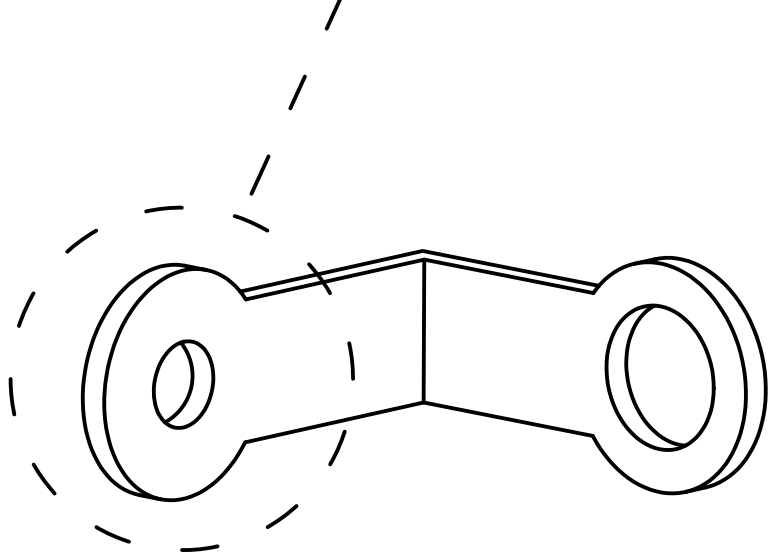



Step 10

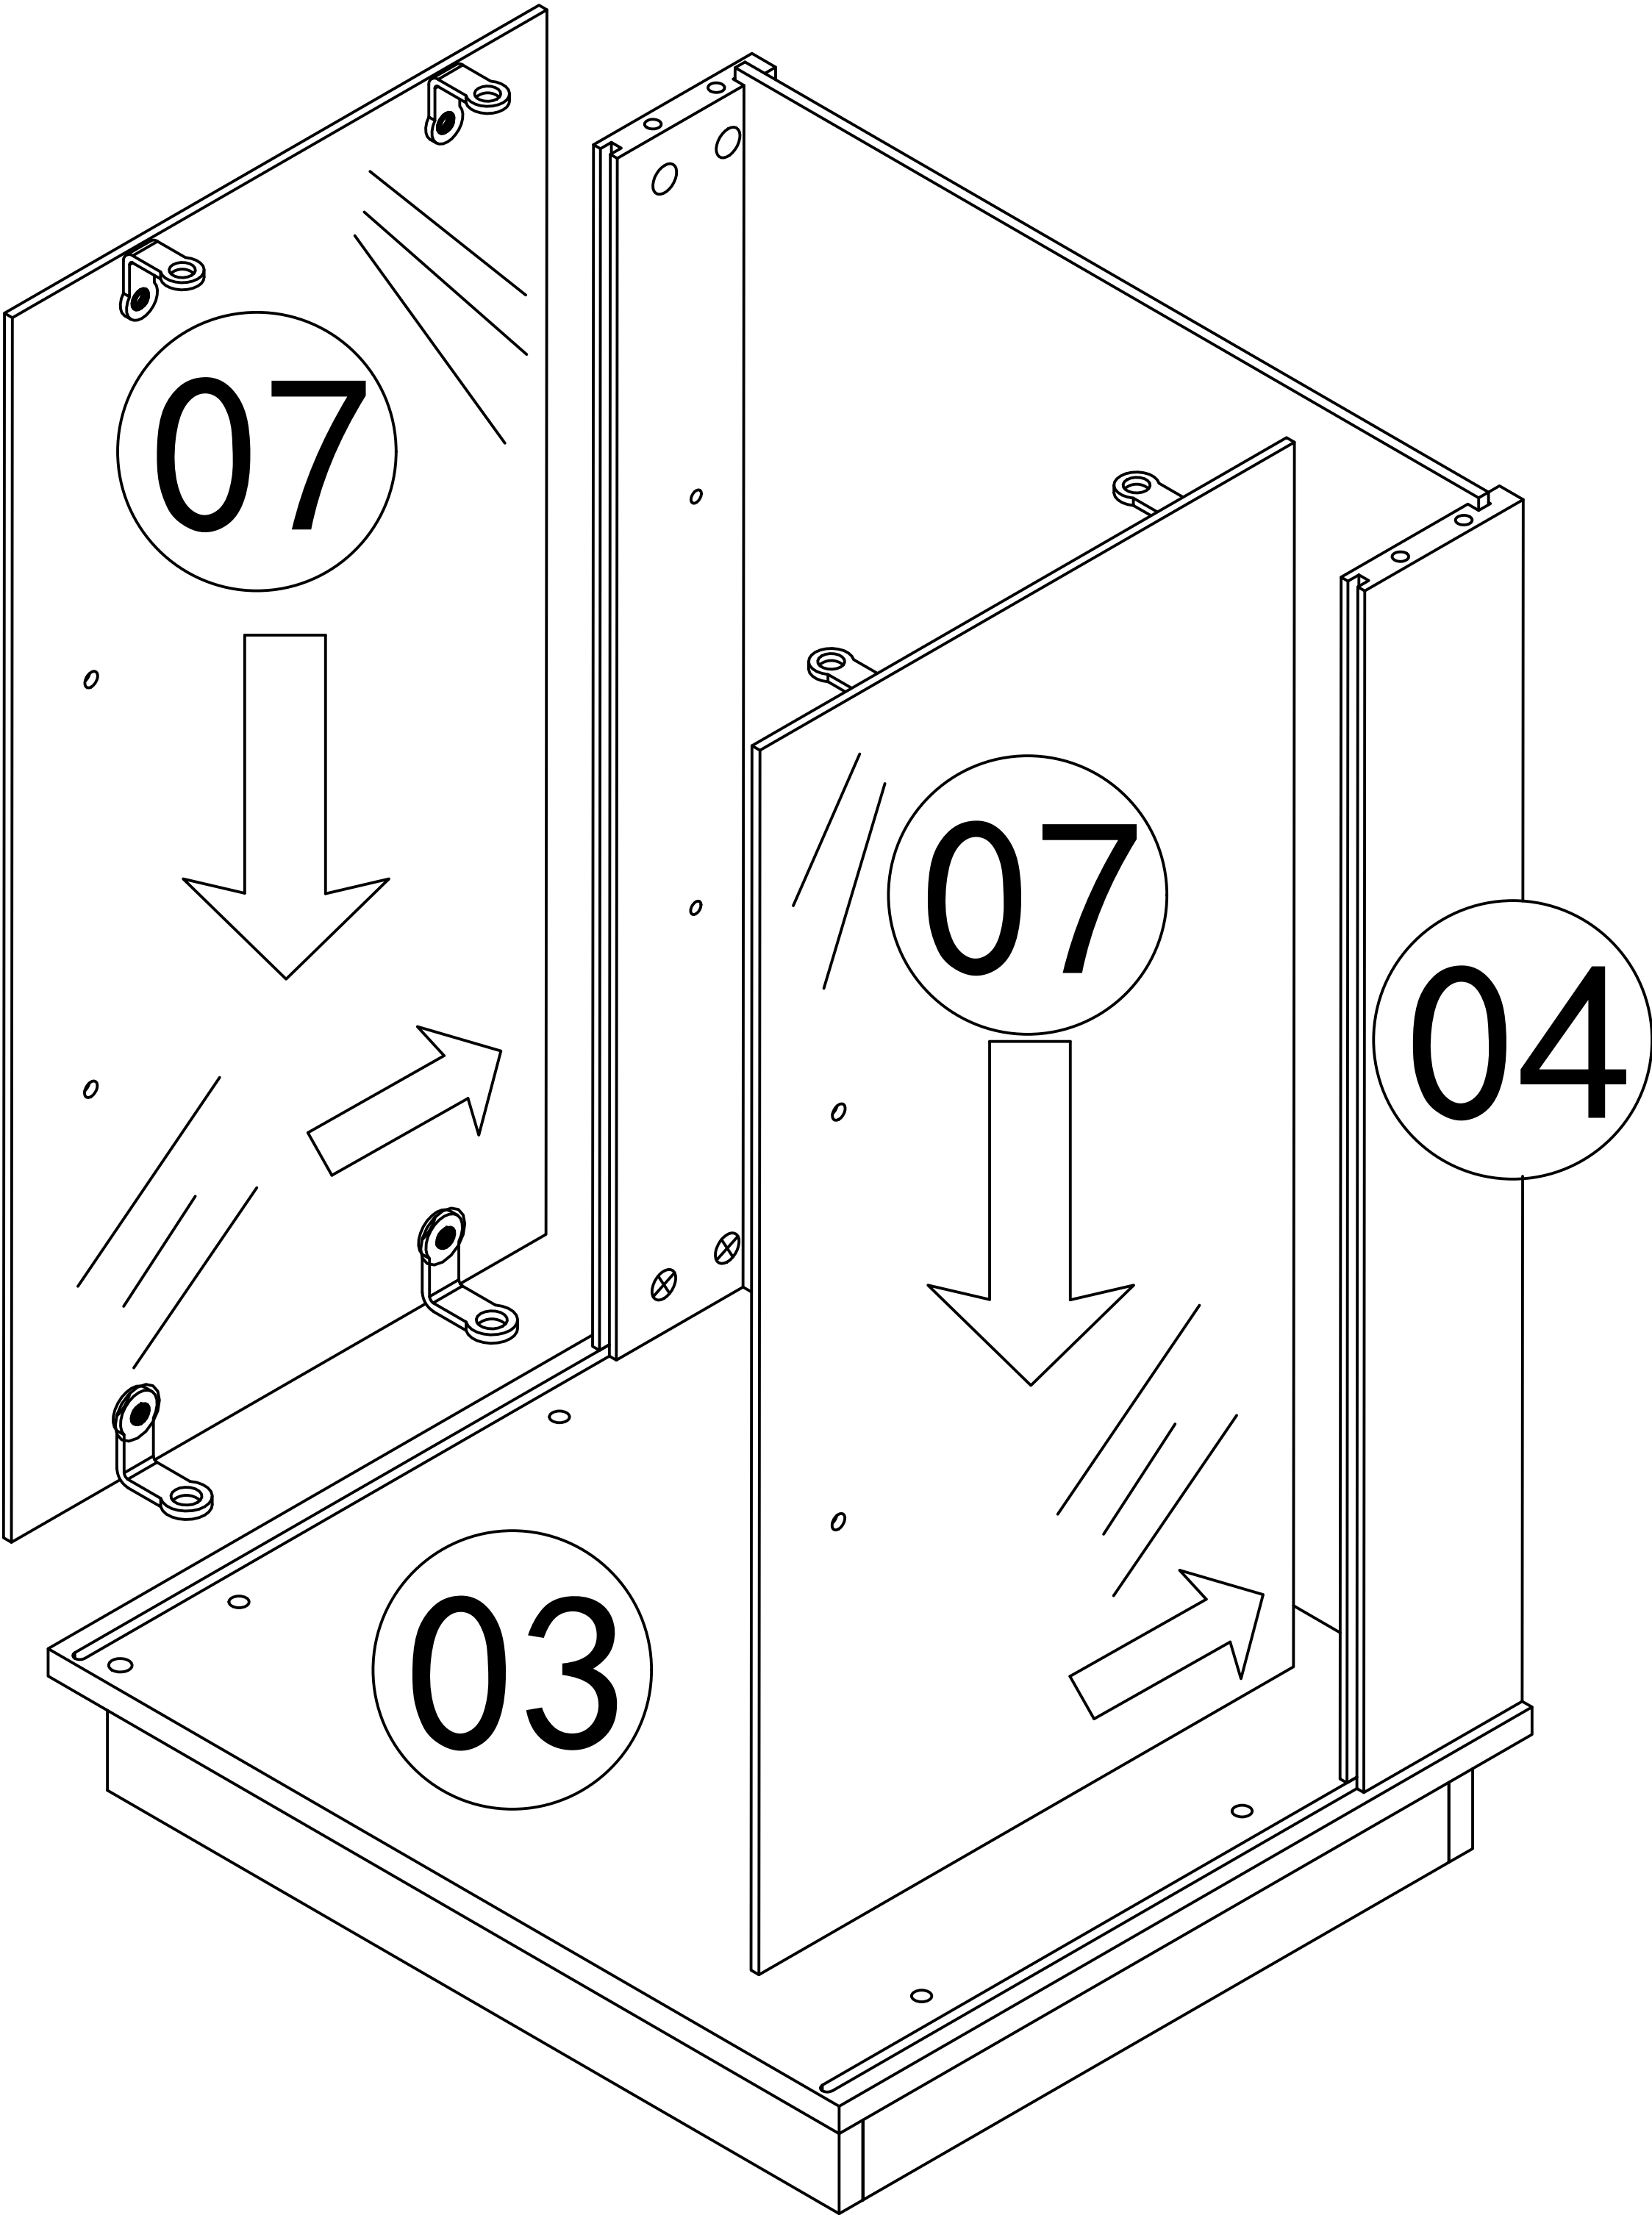

Step 11


H


 x4

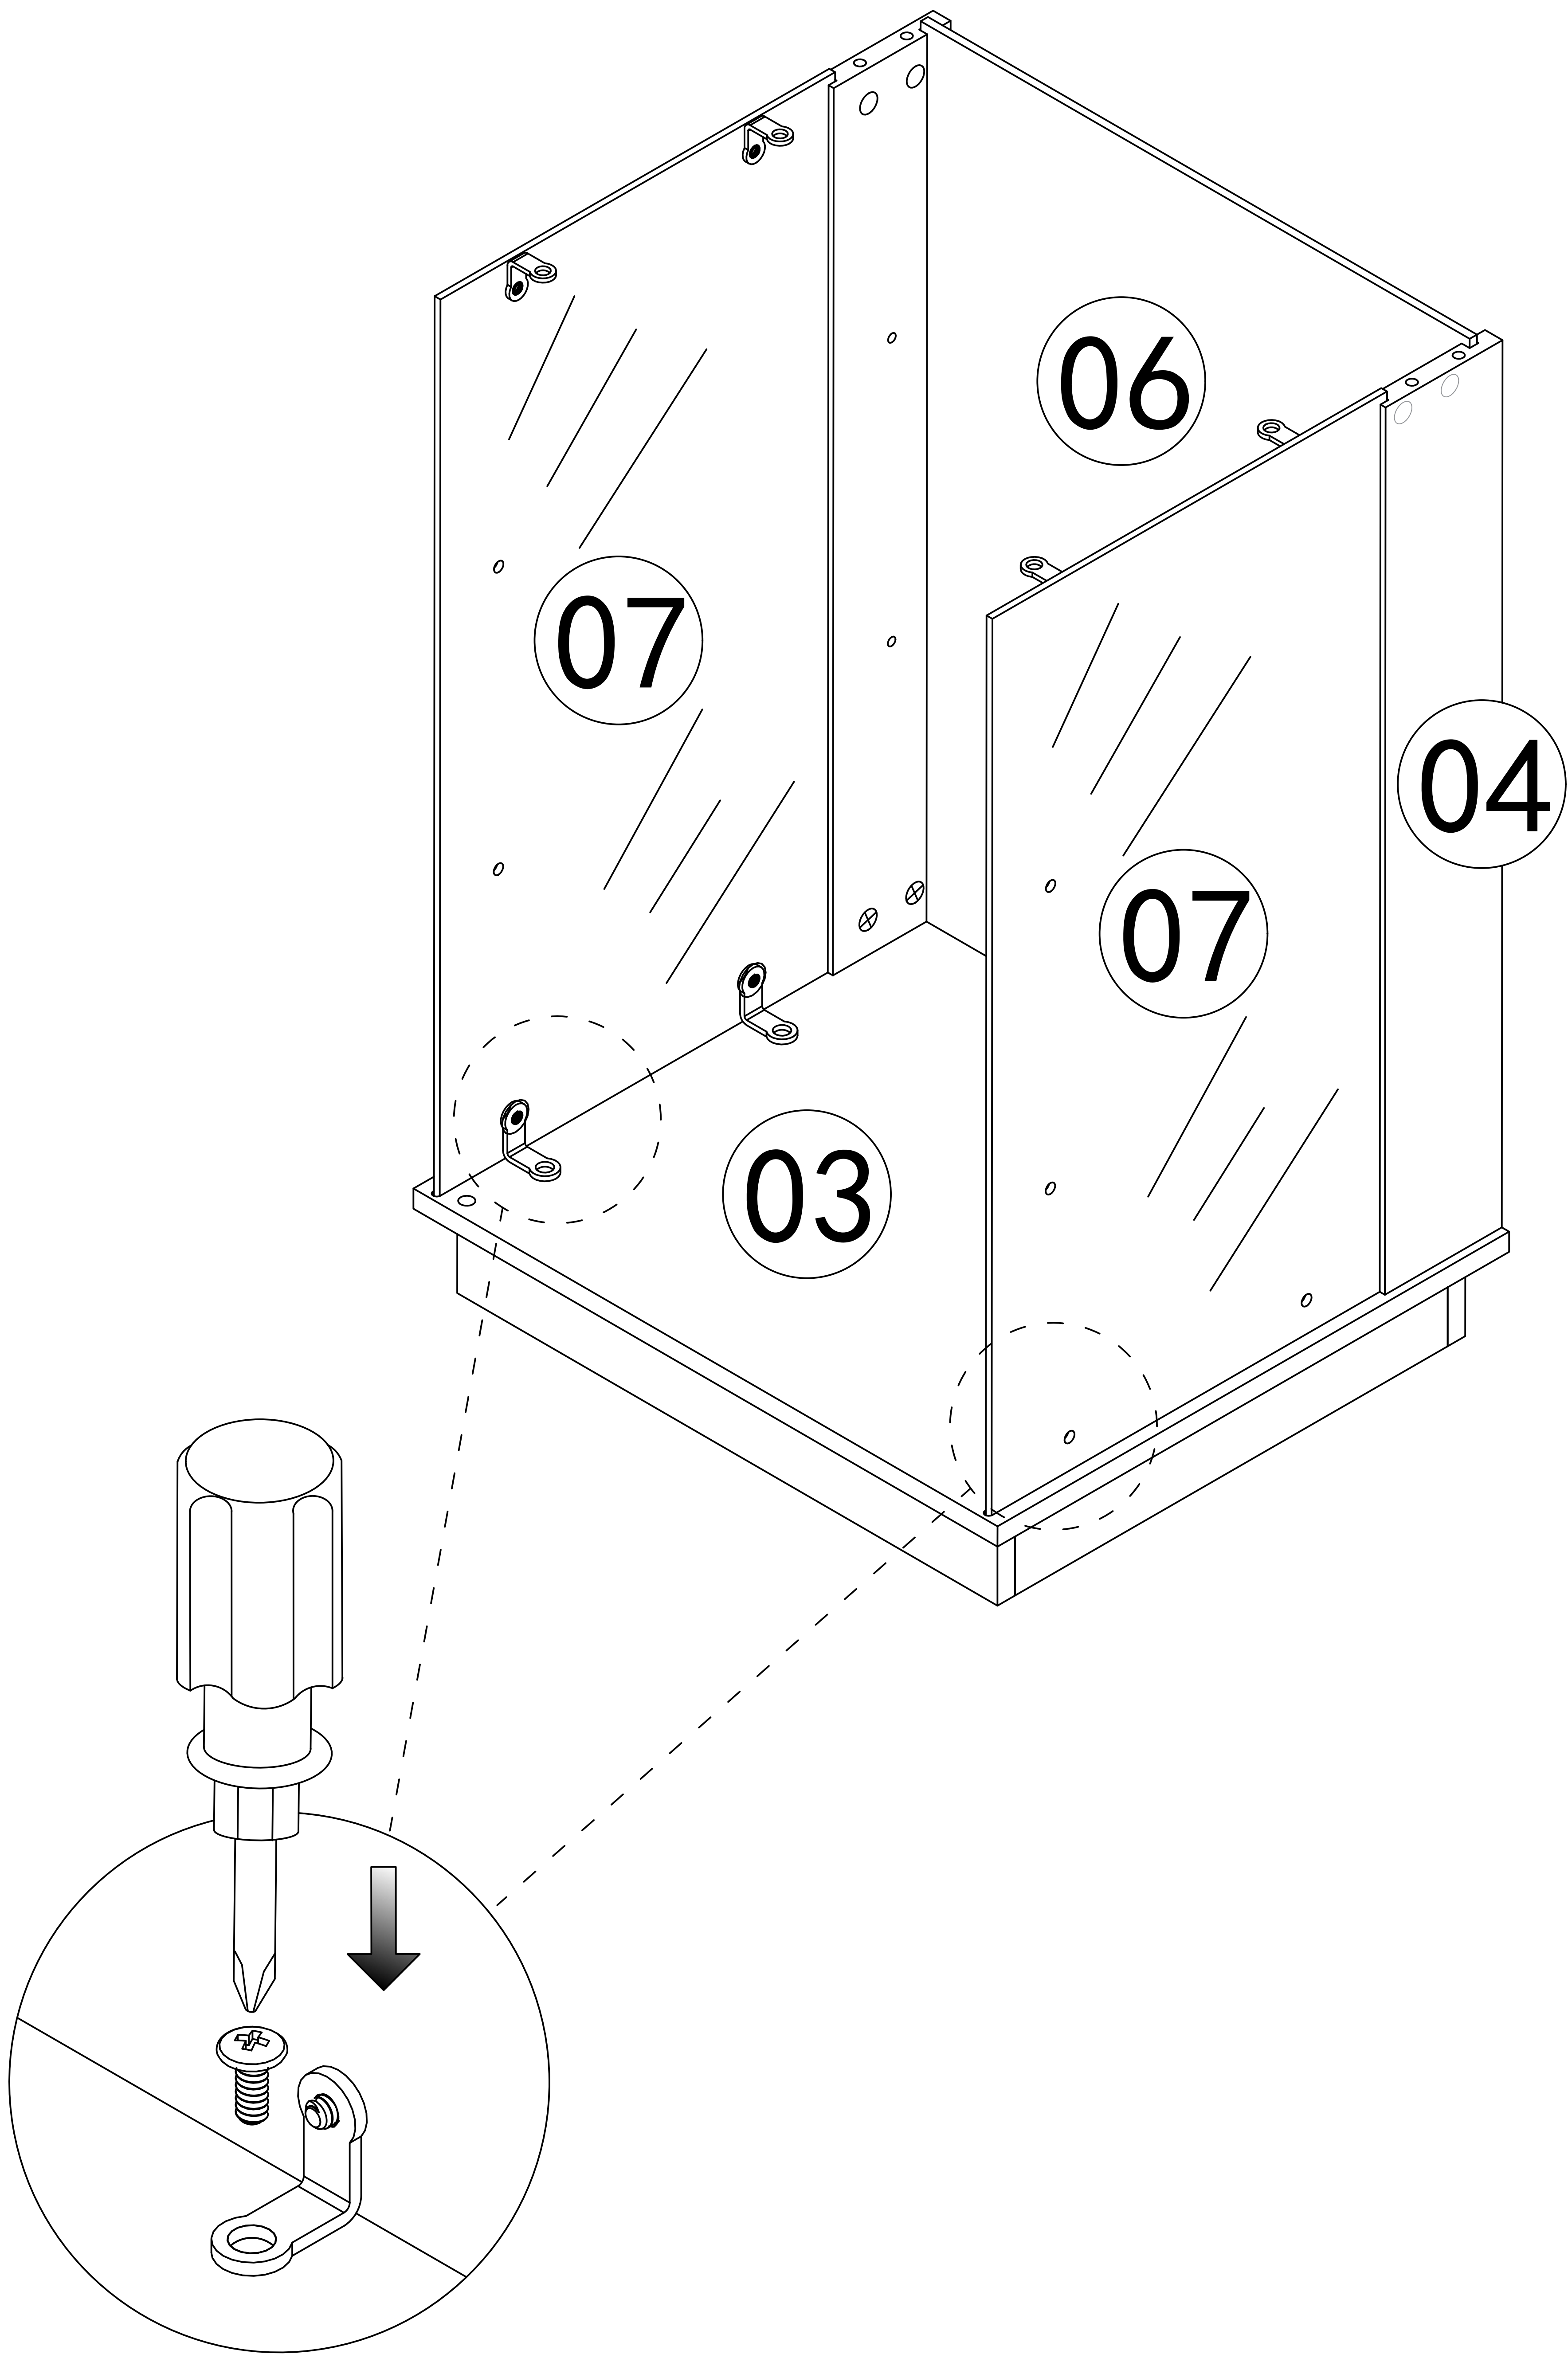



Step 12

- A


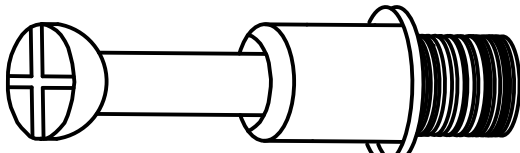
 x4
- F


 x1

 x4

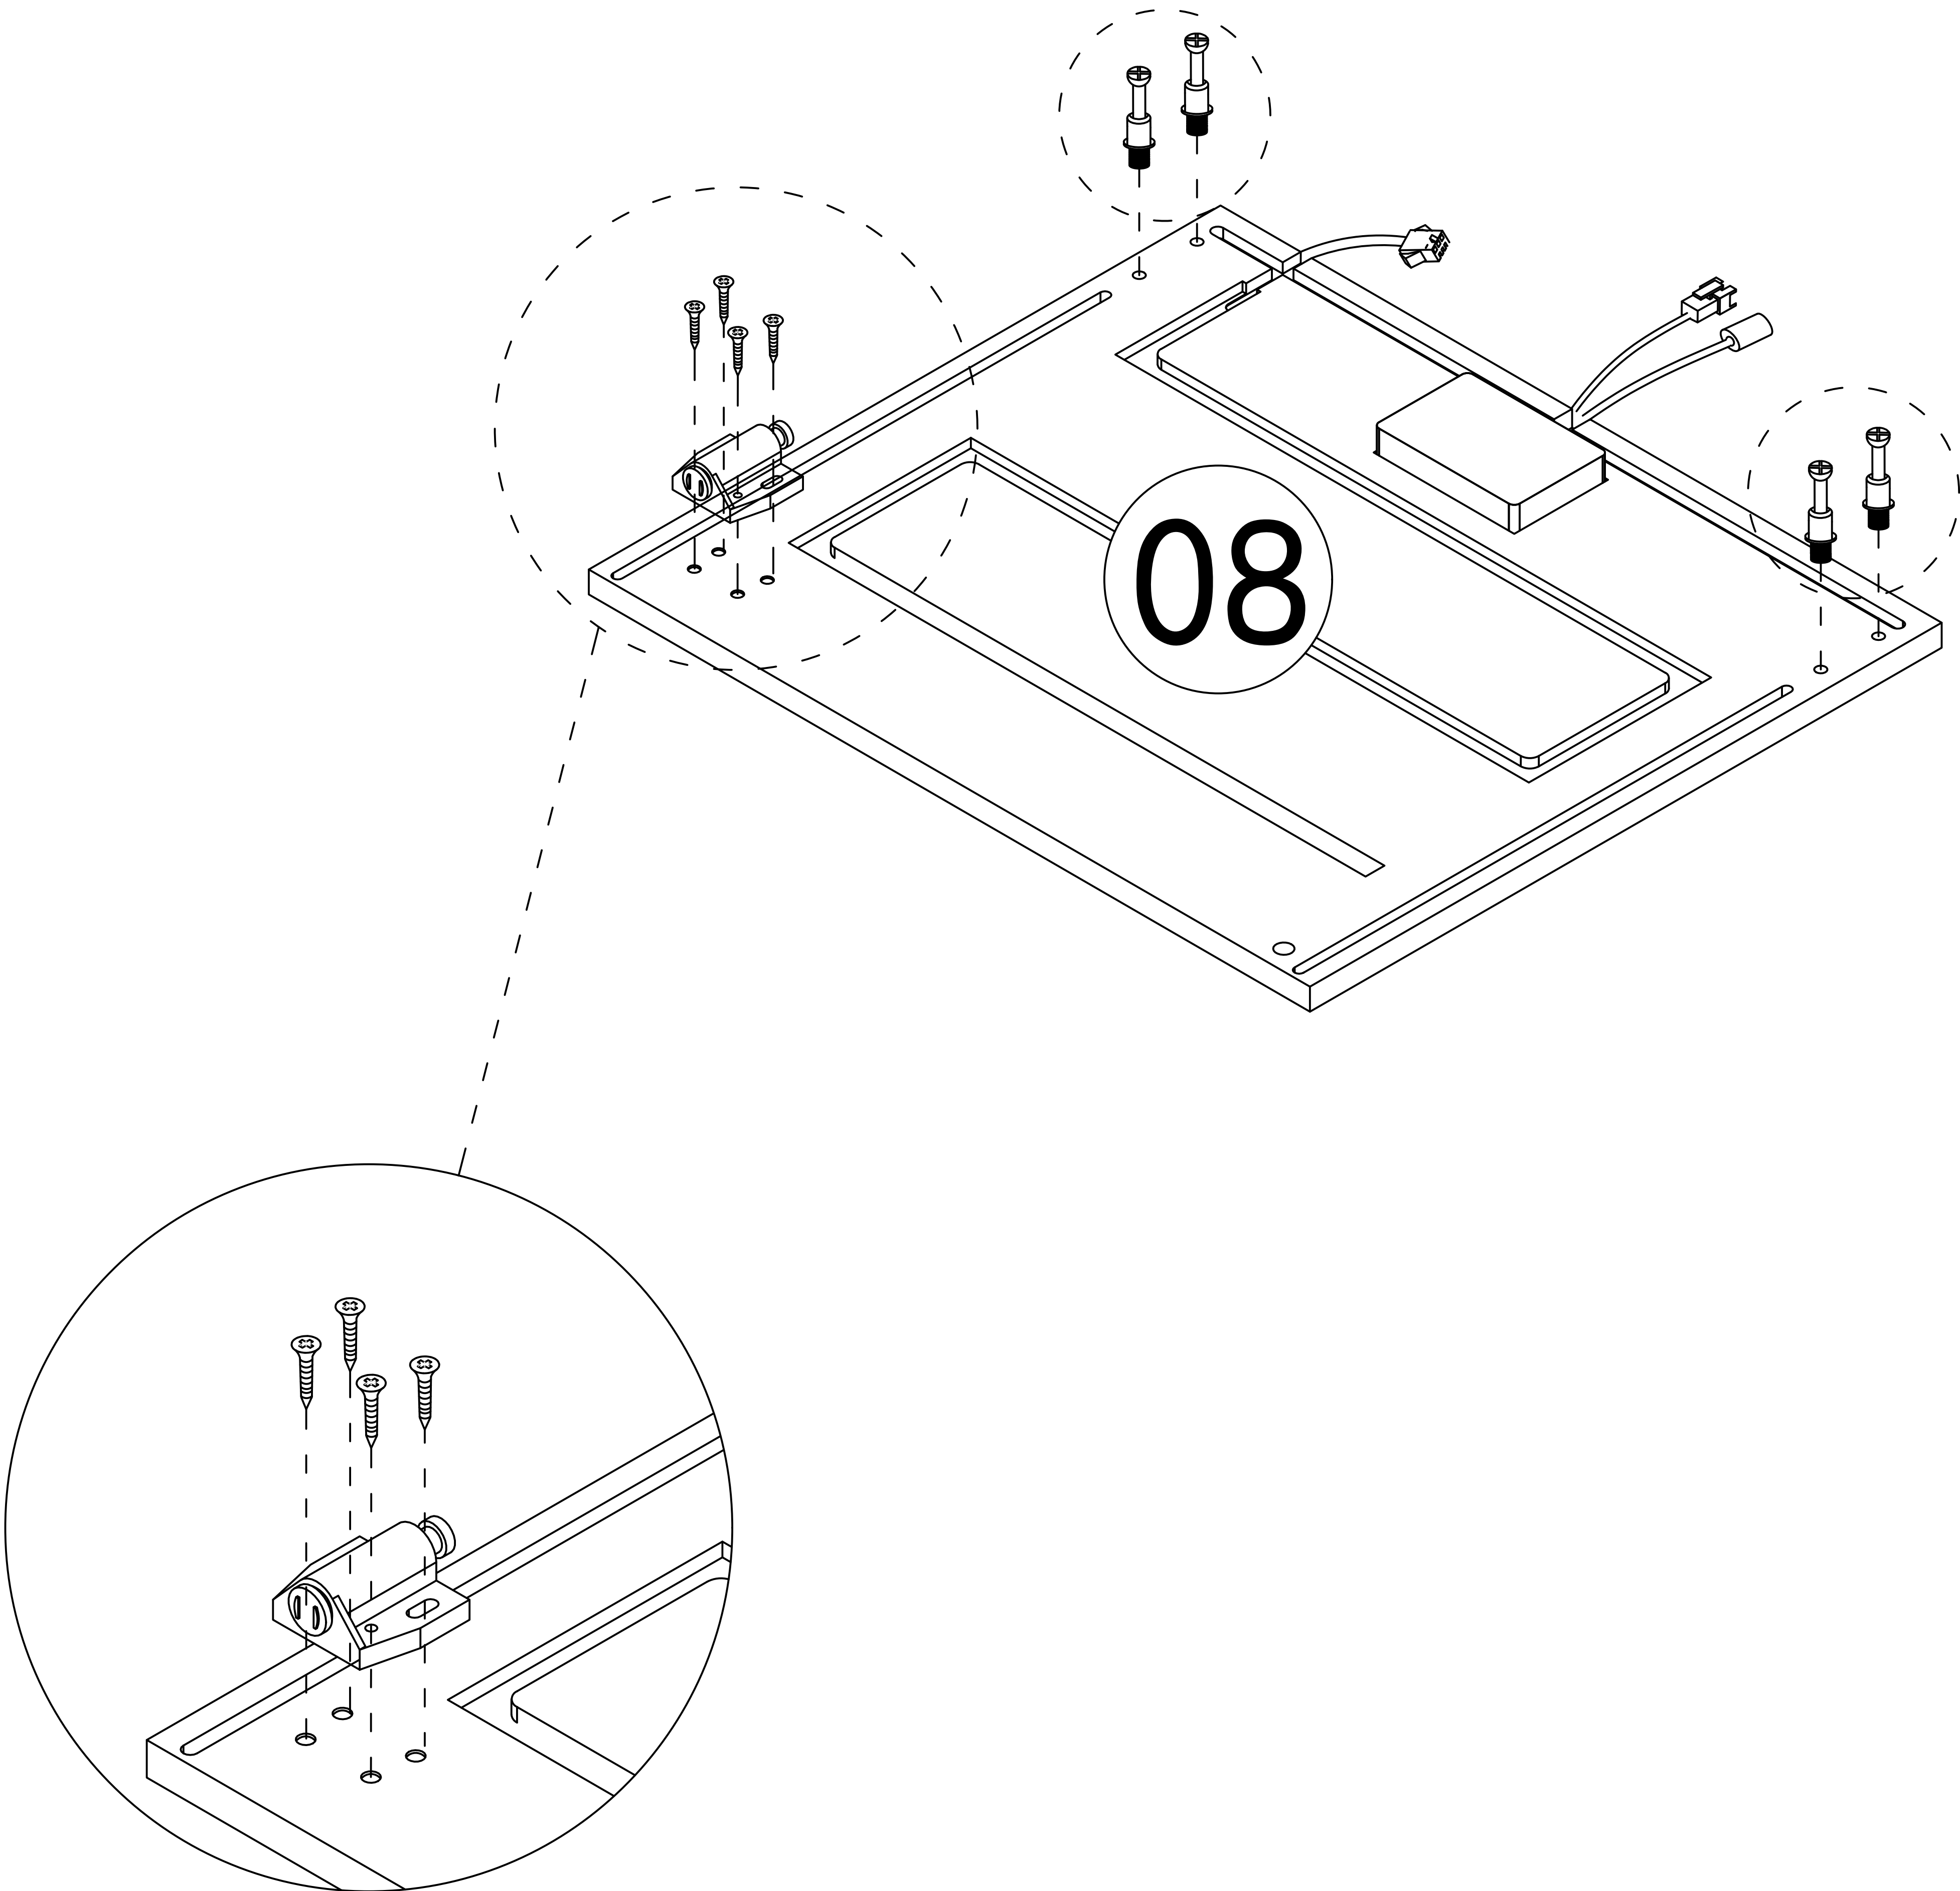



Step 13

B		x4
H		x4

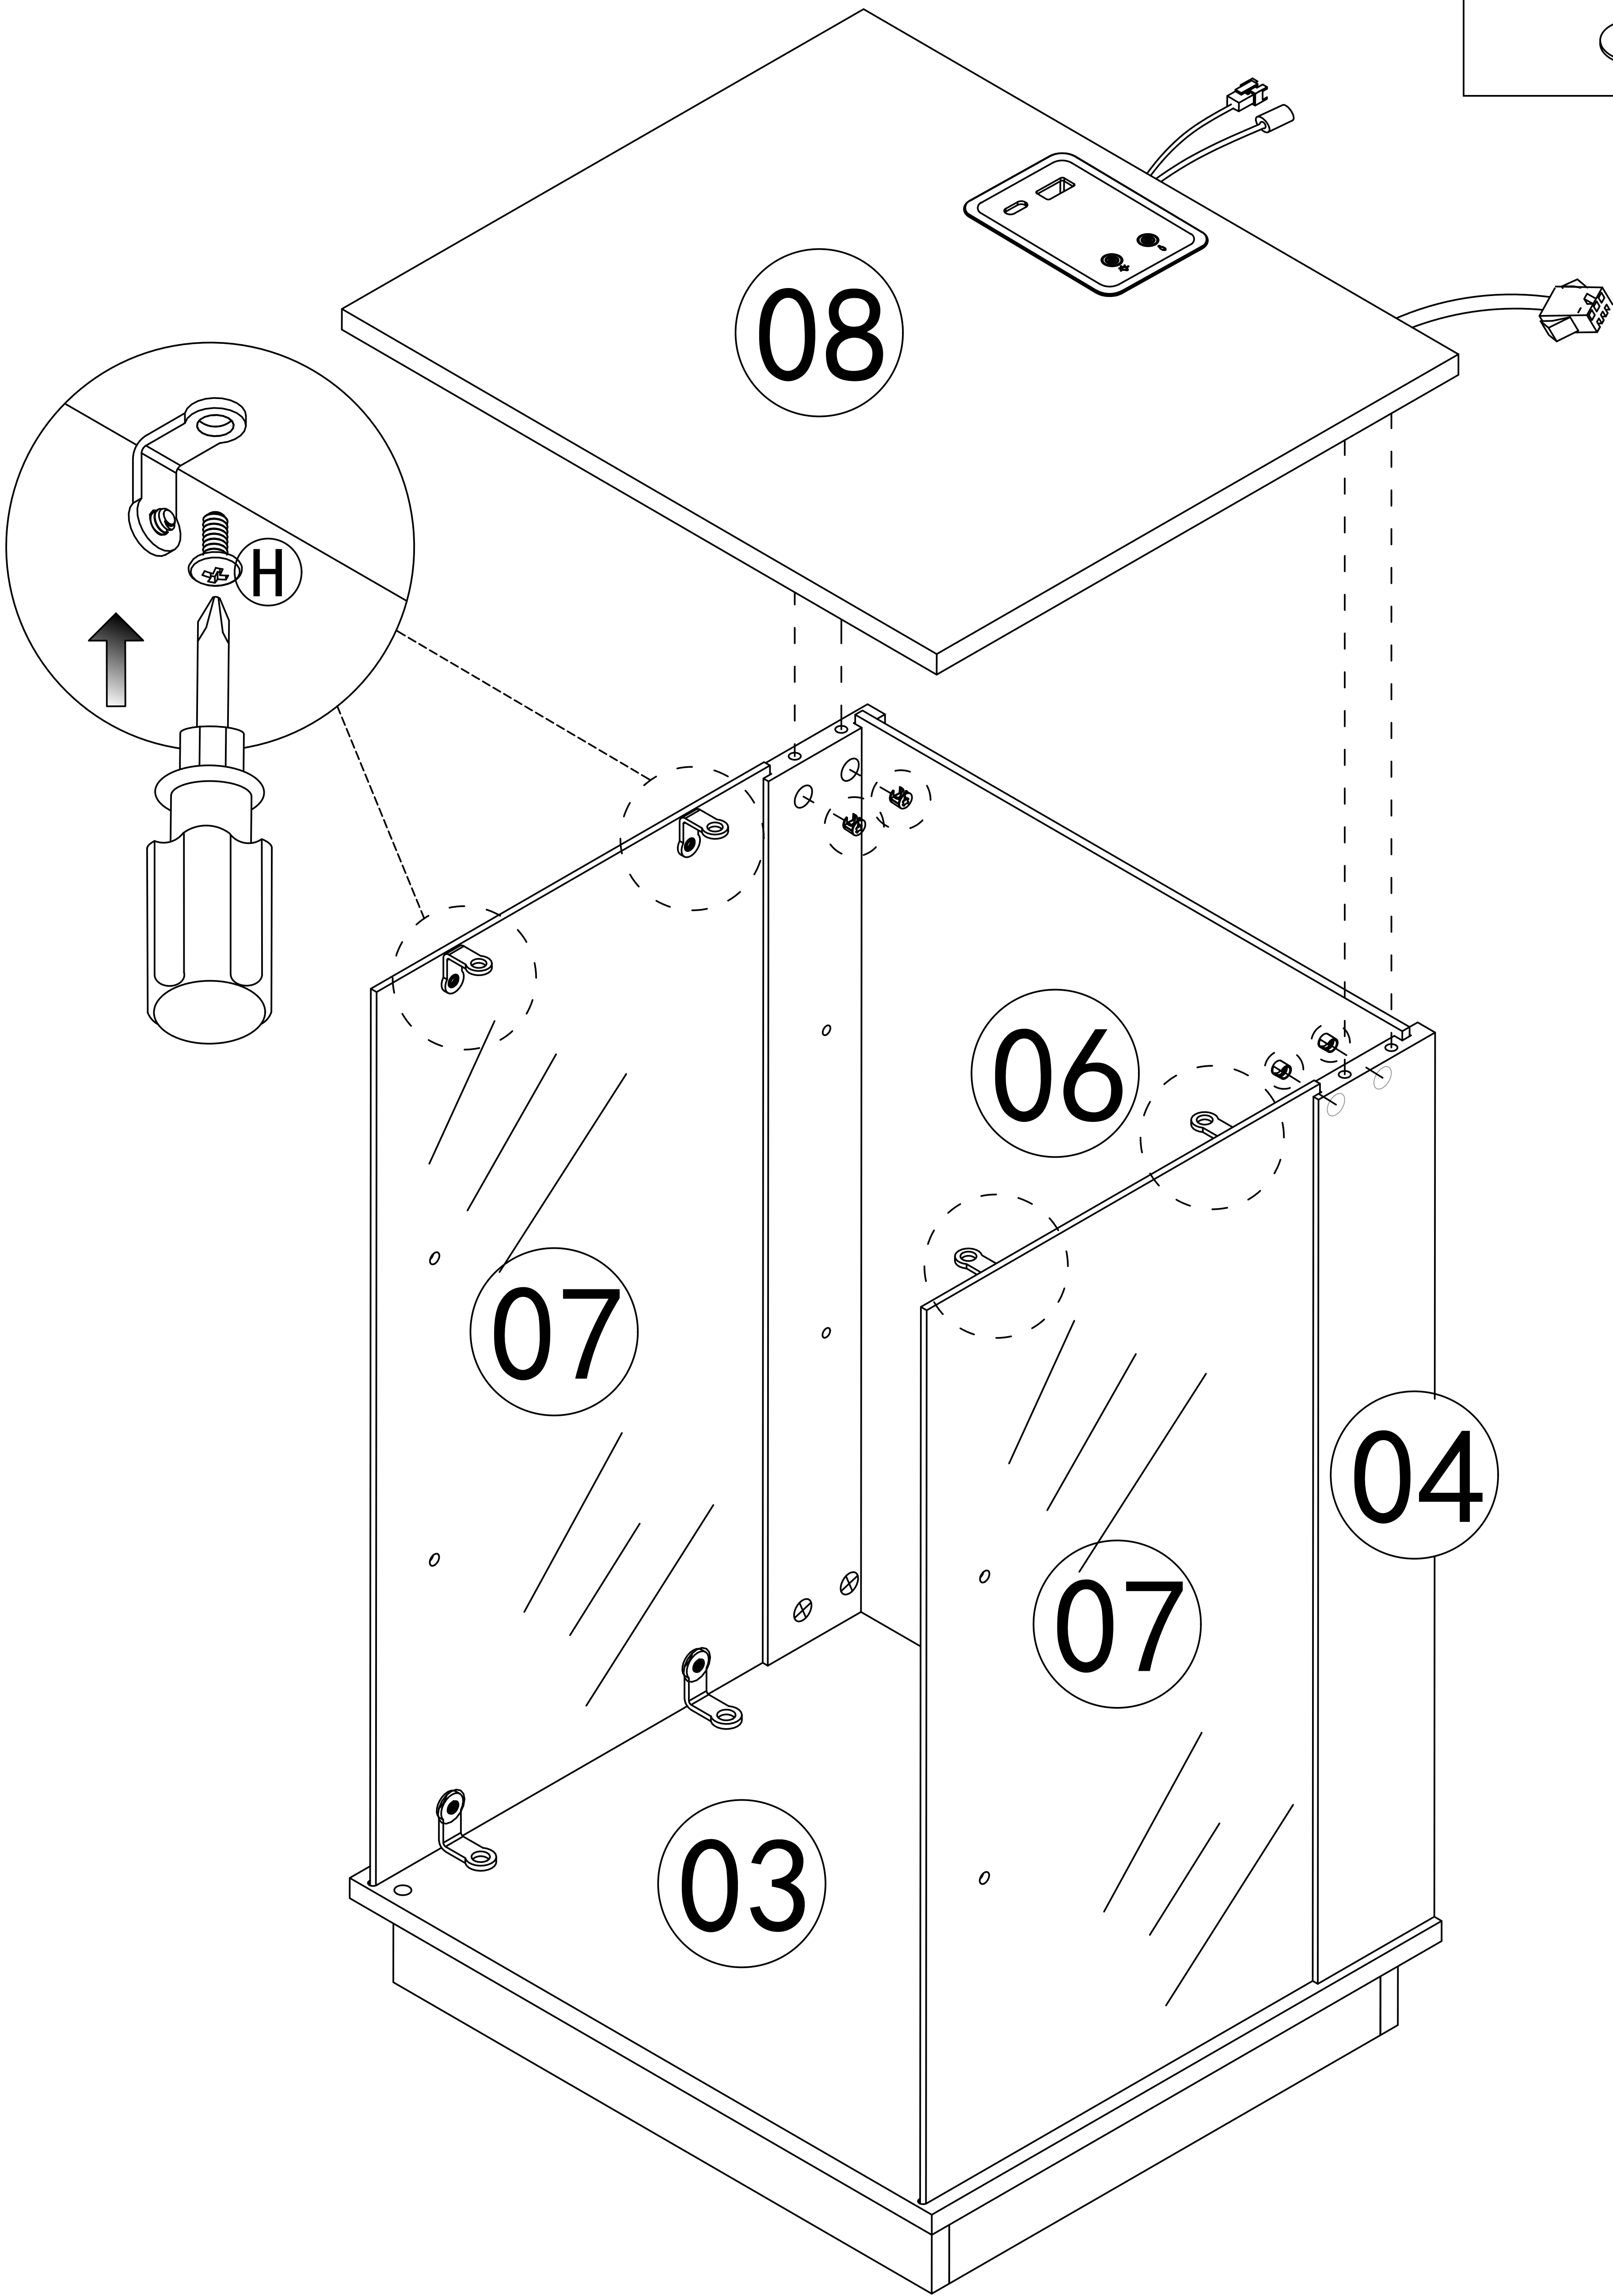


Step 14


- E




x4x4x4
- D



x4

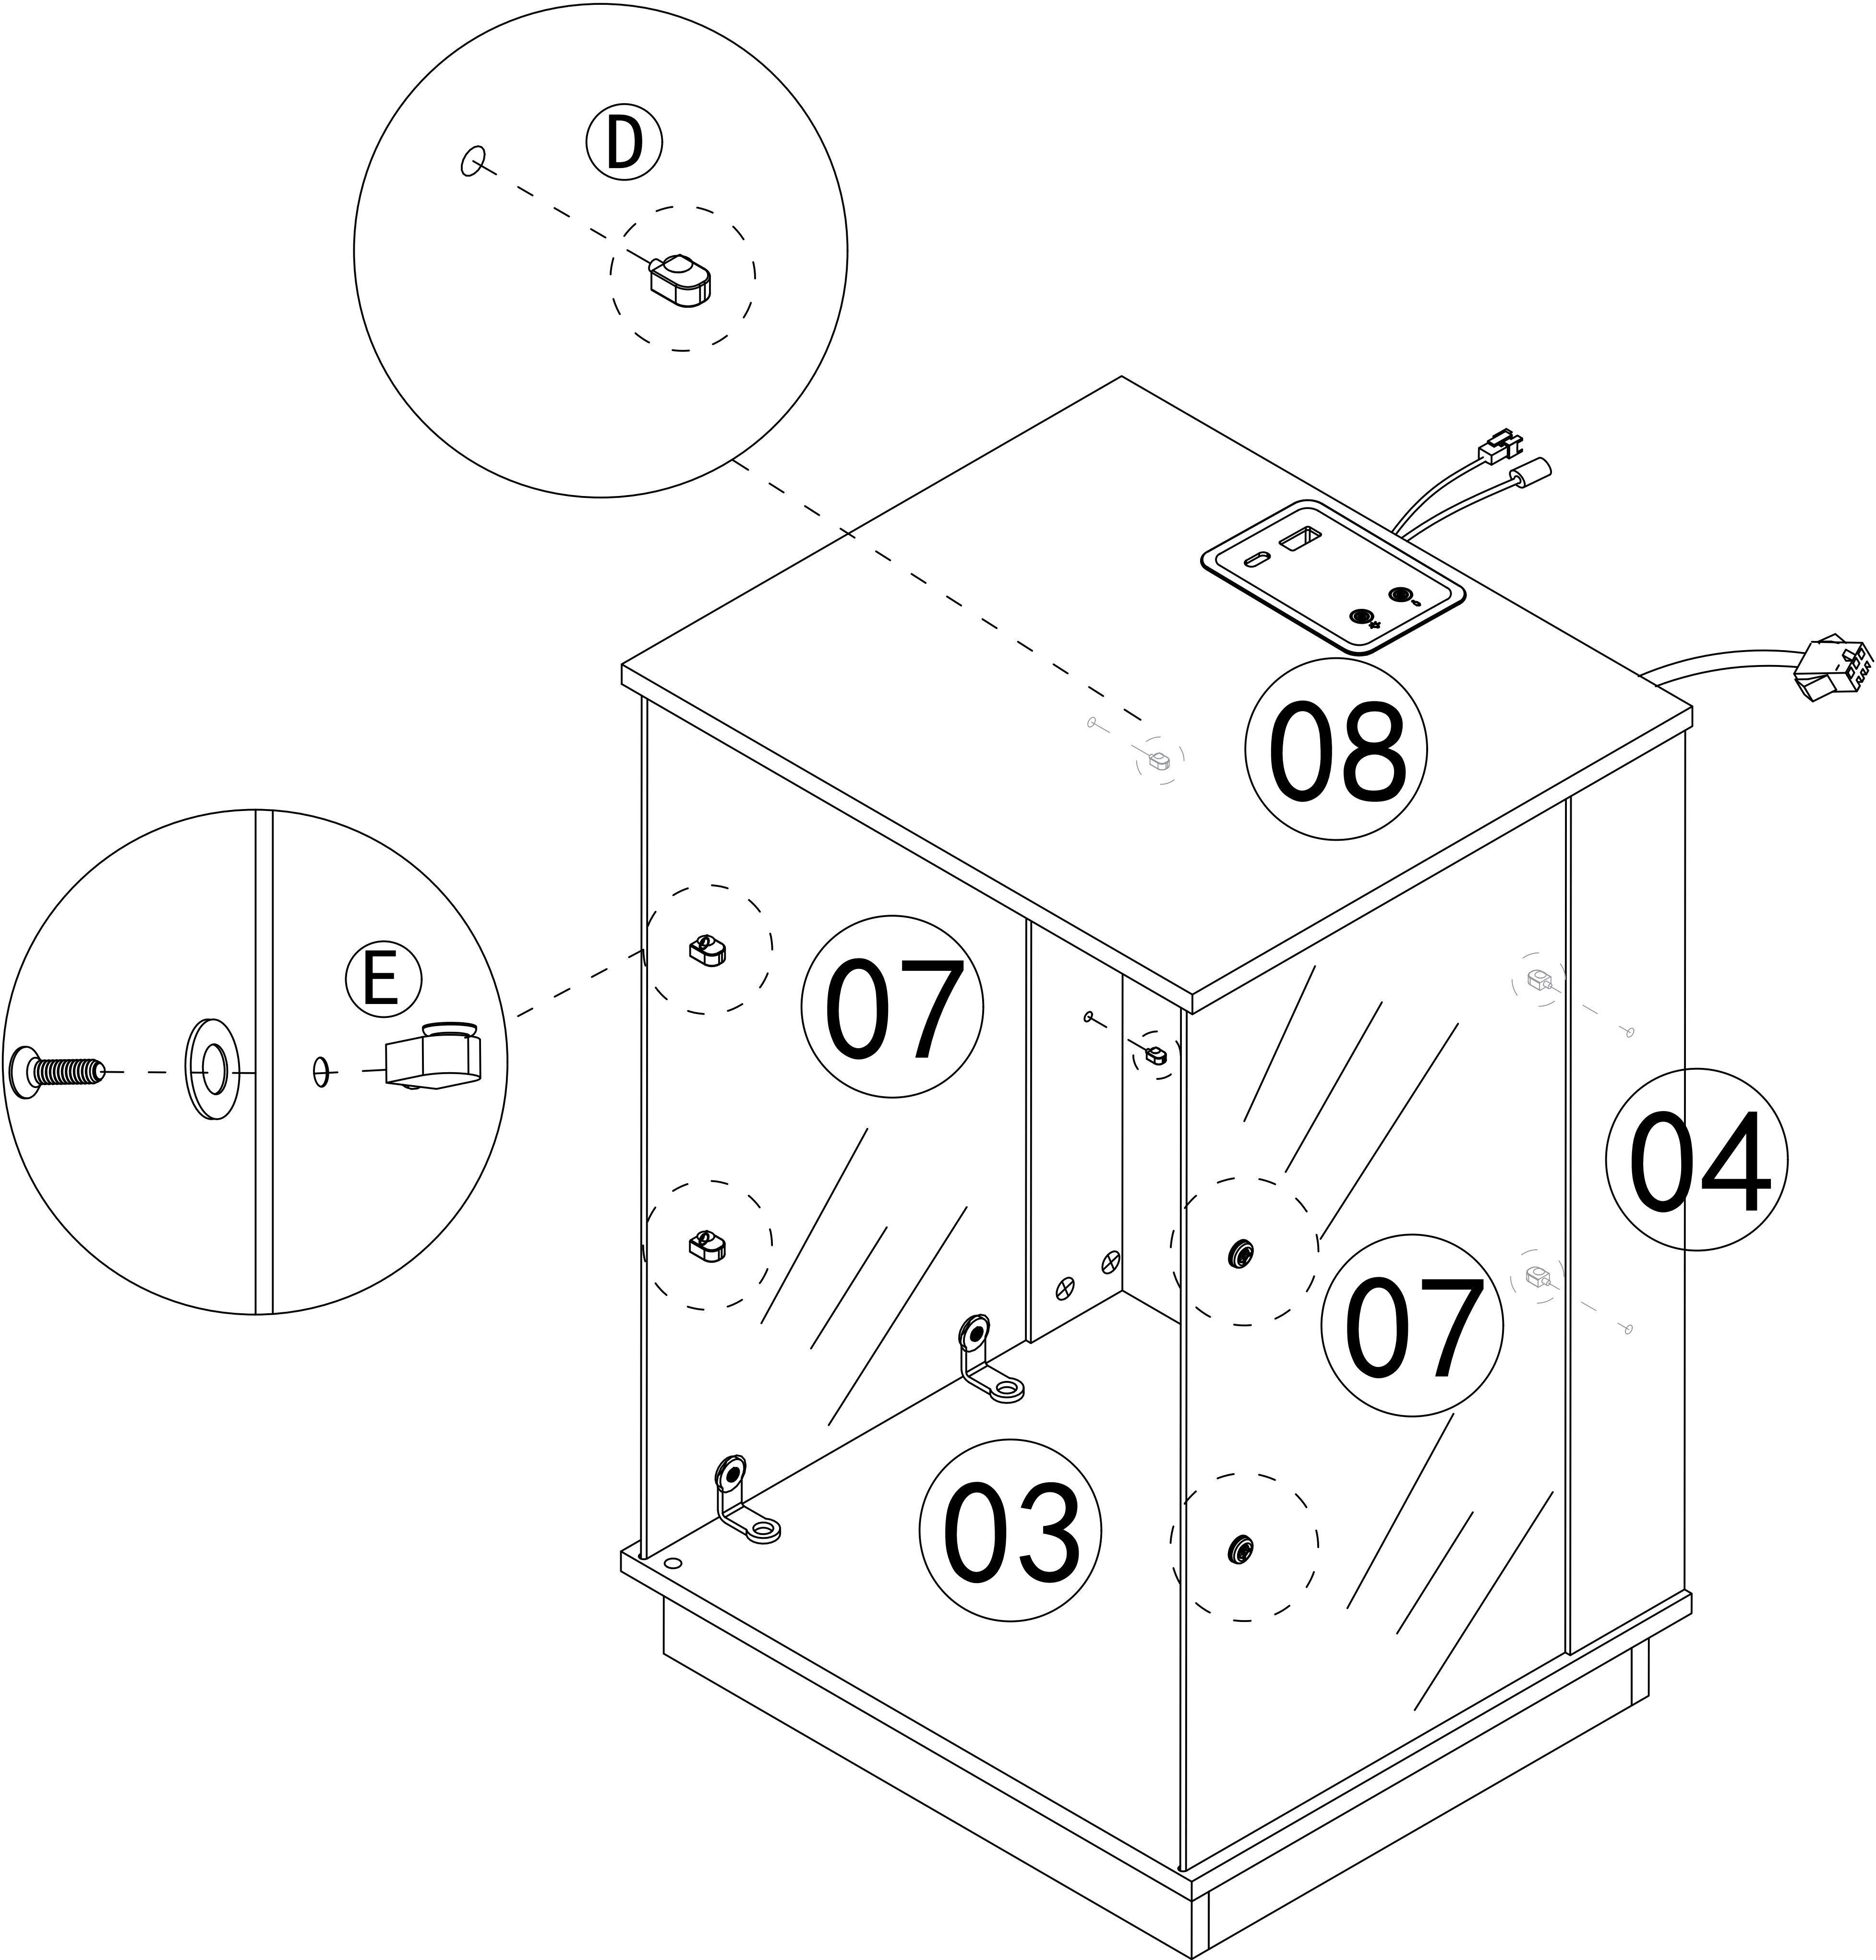


Step 15

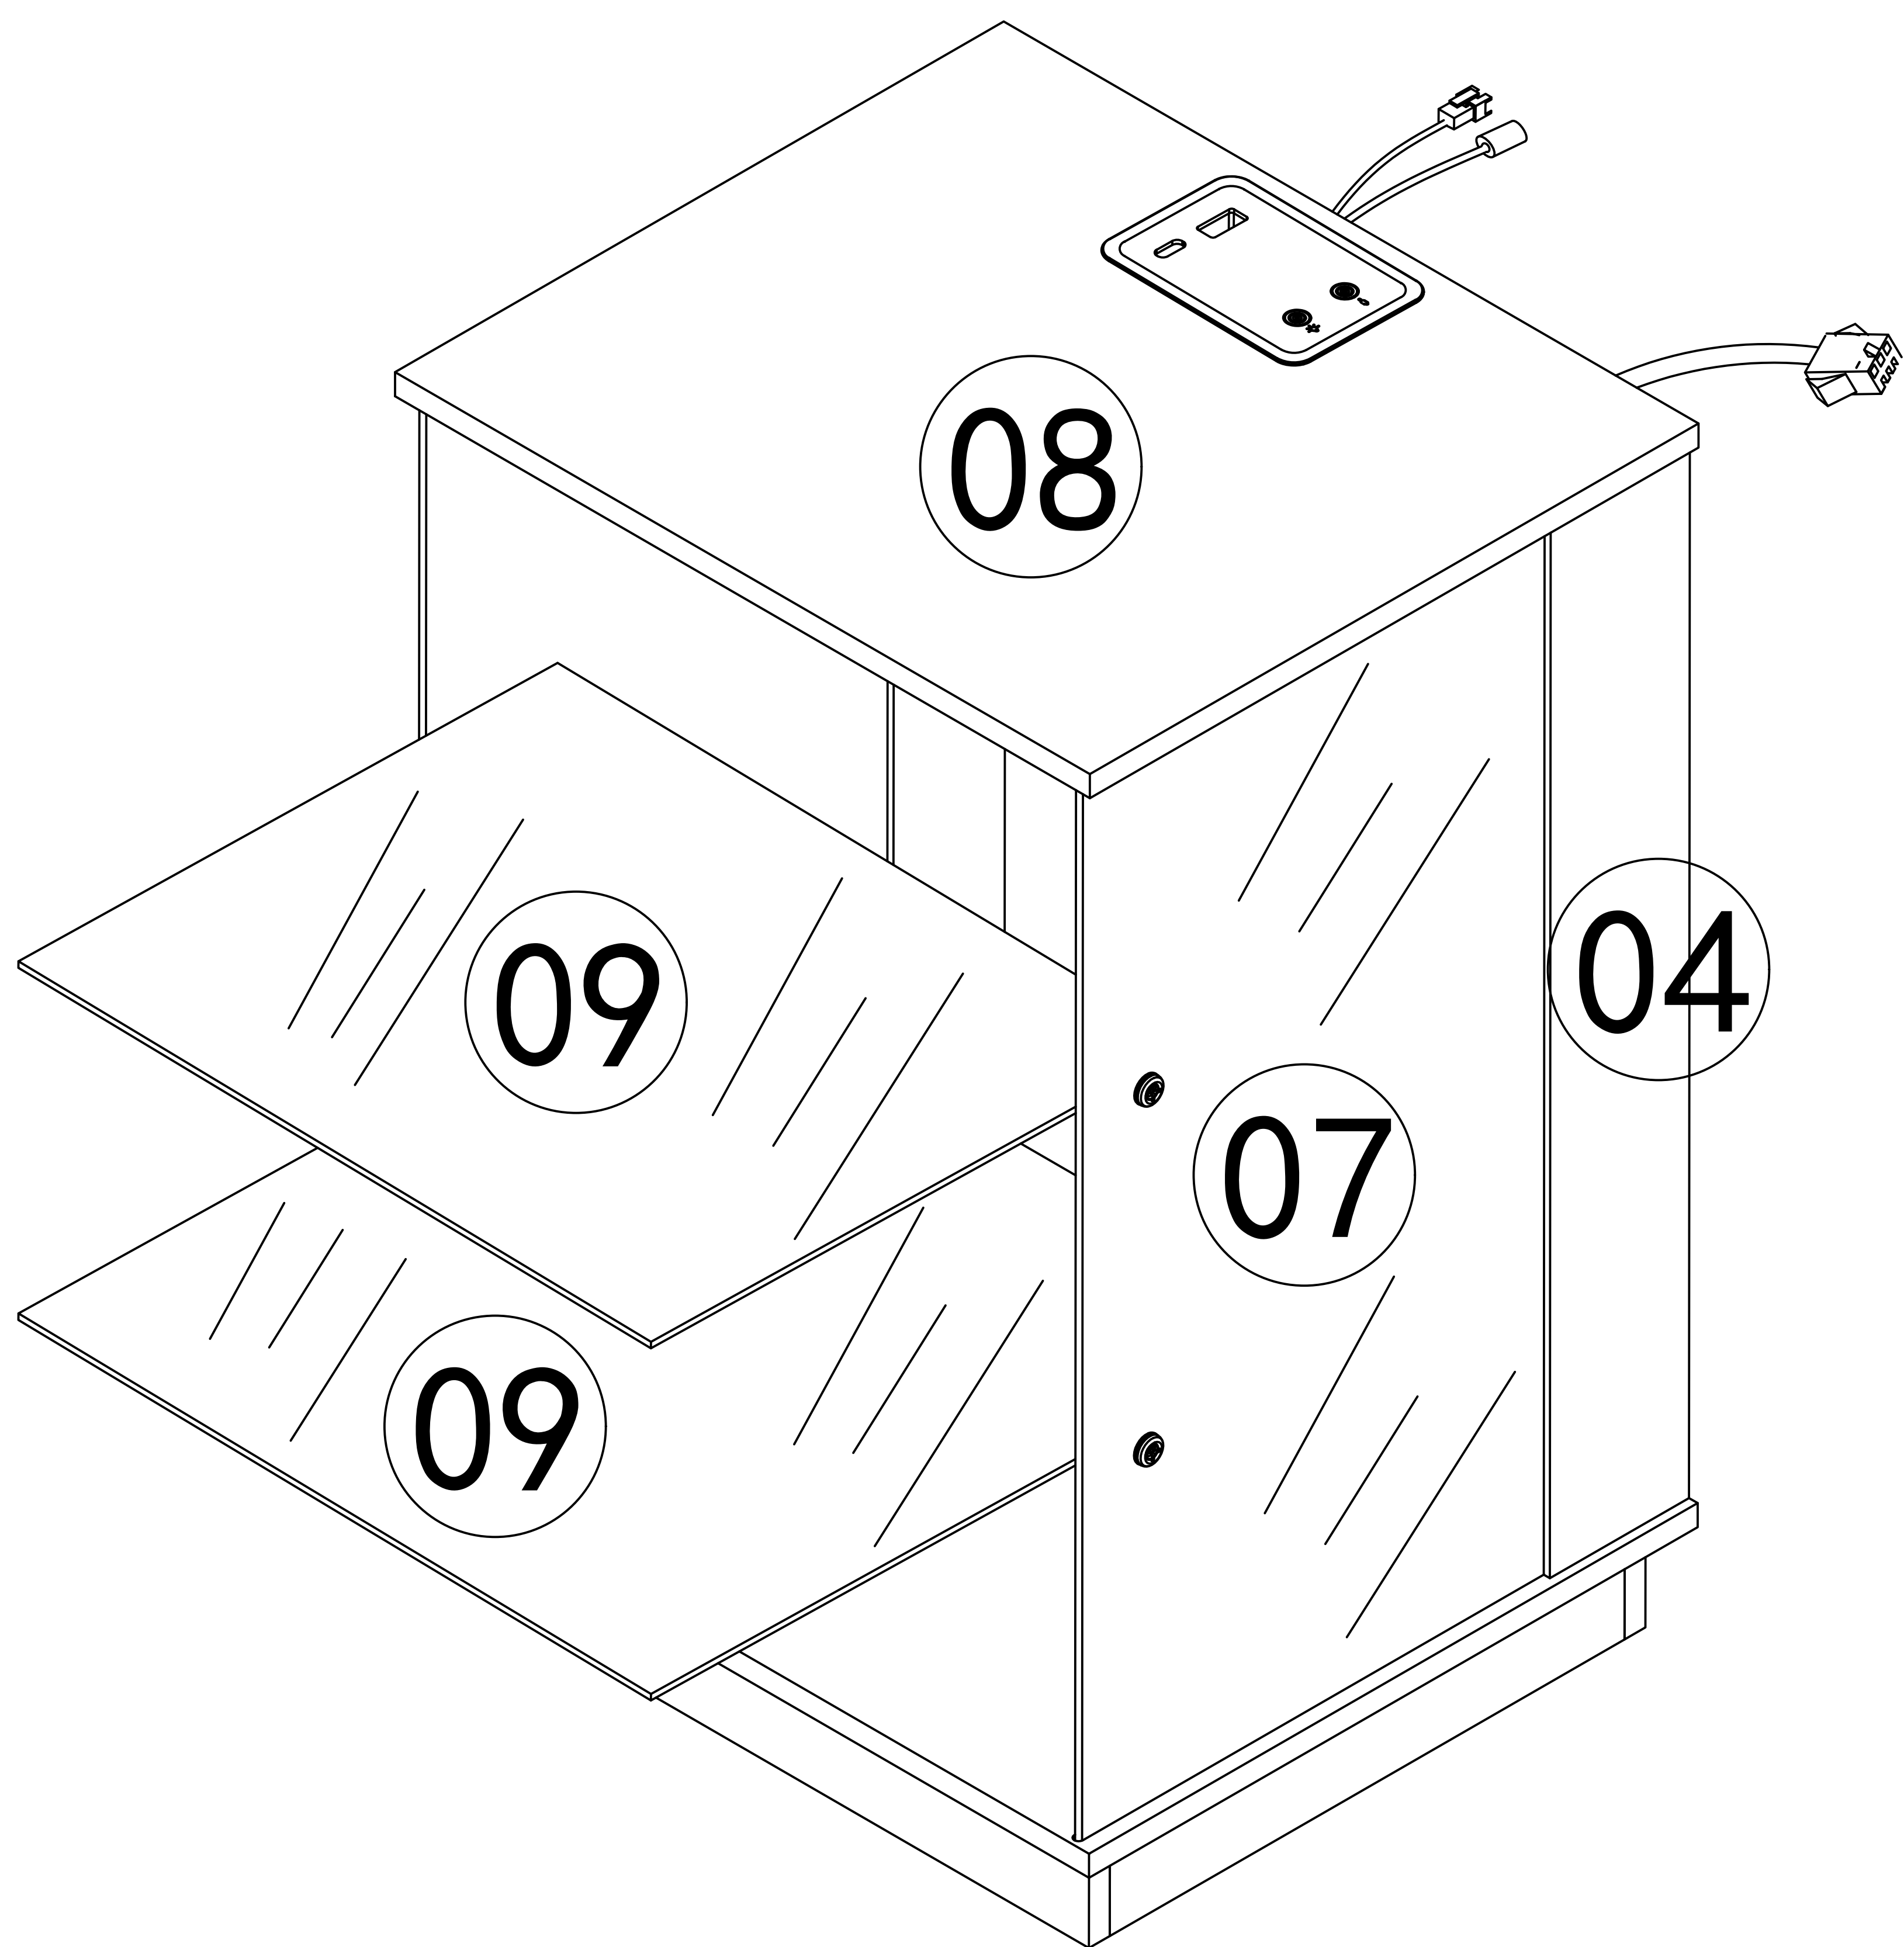


Step 16

First, completely unscrew
the screws on the parts

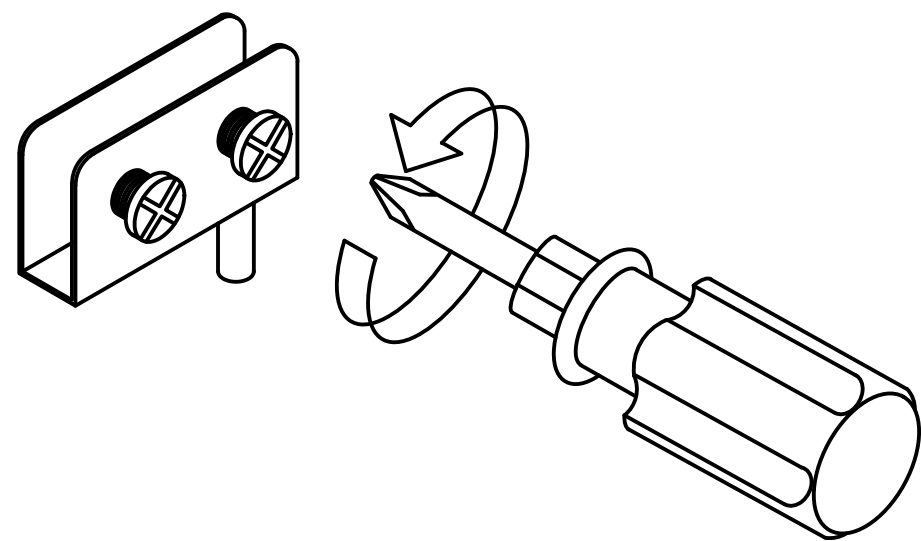


Place the white gasket first,
then install the hinge, and
finally tighten the screws.

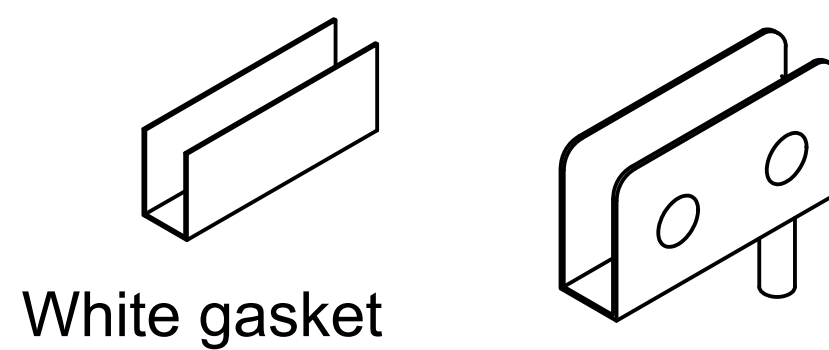


White gasket

F

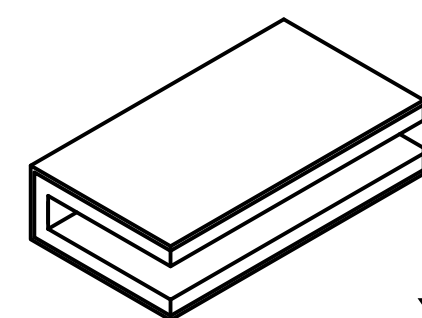


x1

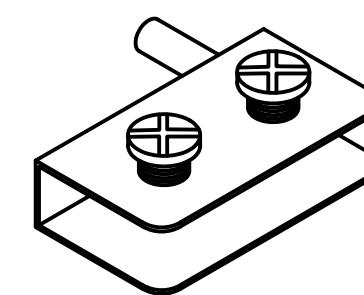



x1

Pay attention to the
direction of the door
hinge, and rotate the
screws to compress
the white gasket

White gasket

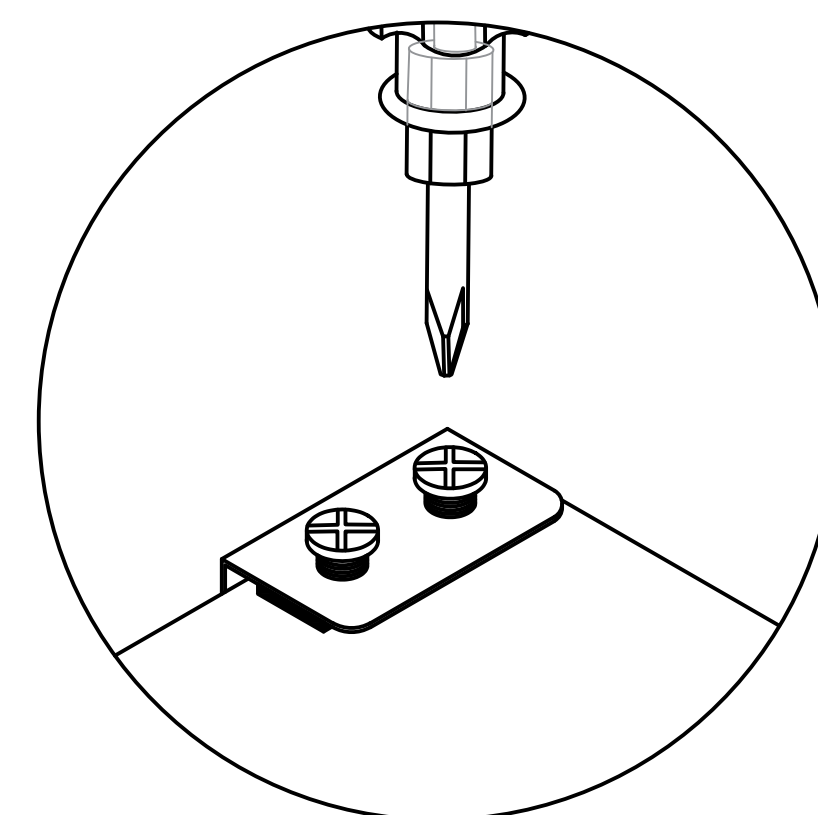

Locking screw

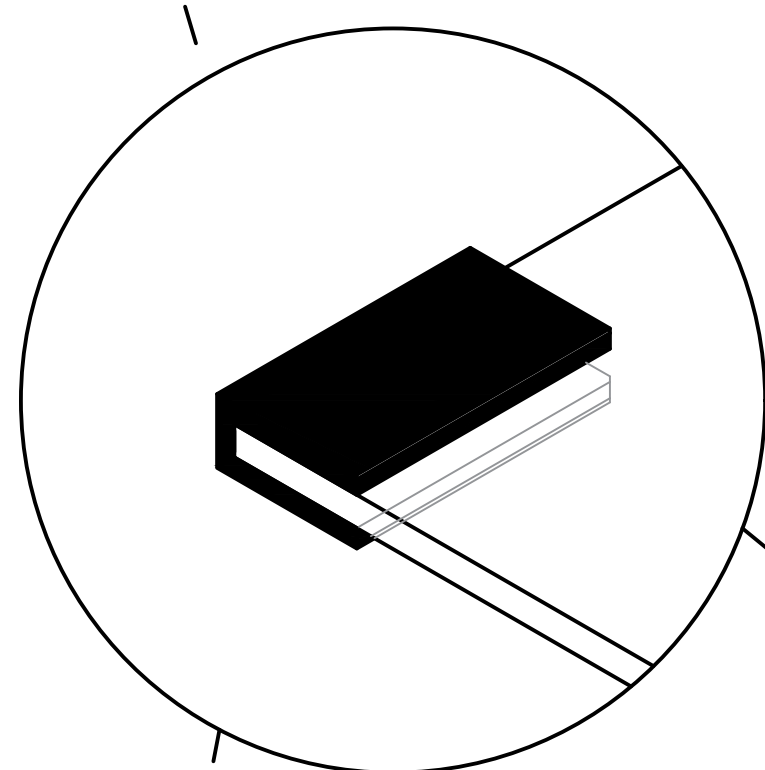


Iron sheet


If you feel loose, please pinch
the accessory before installation

Step 17


F



x1




x1

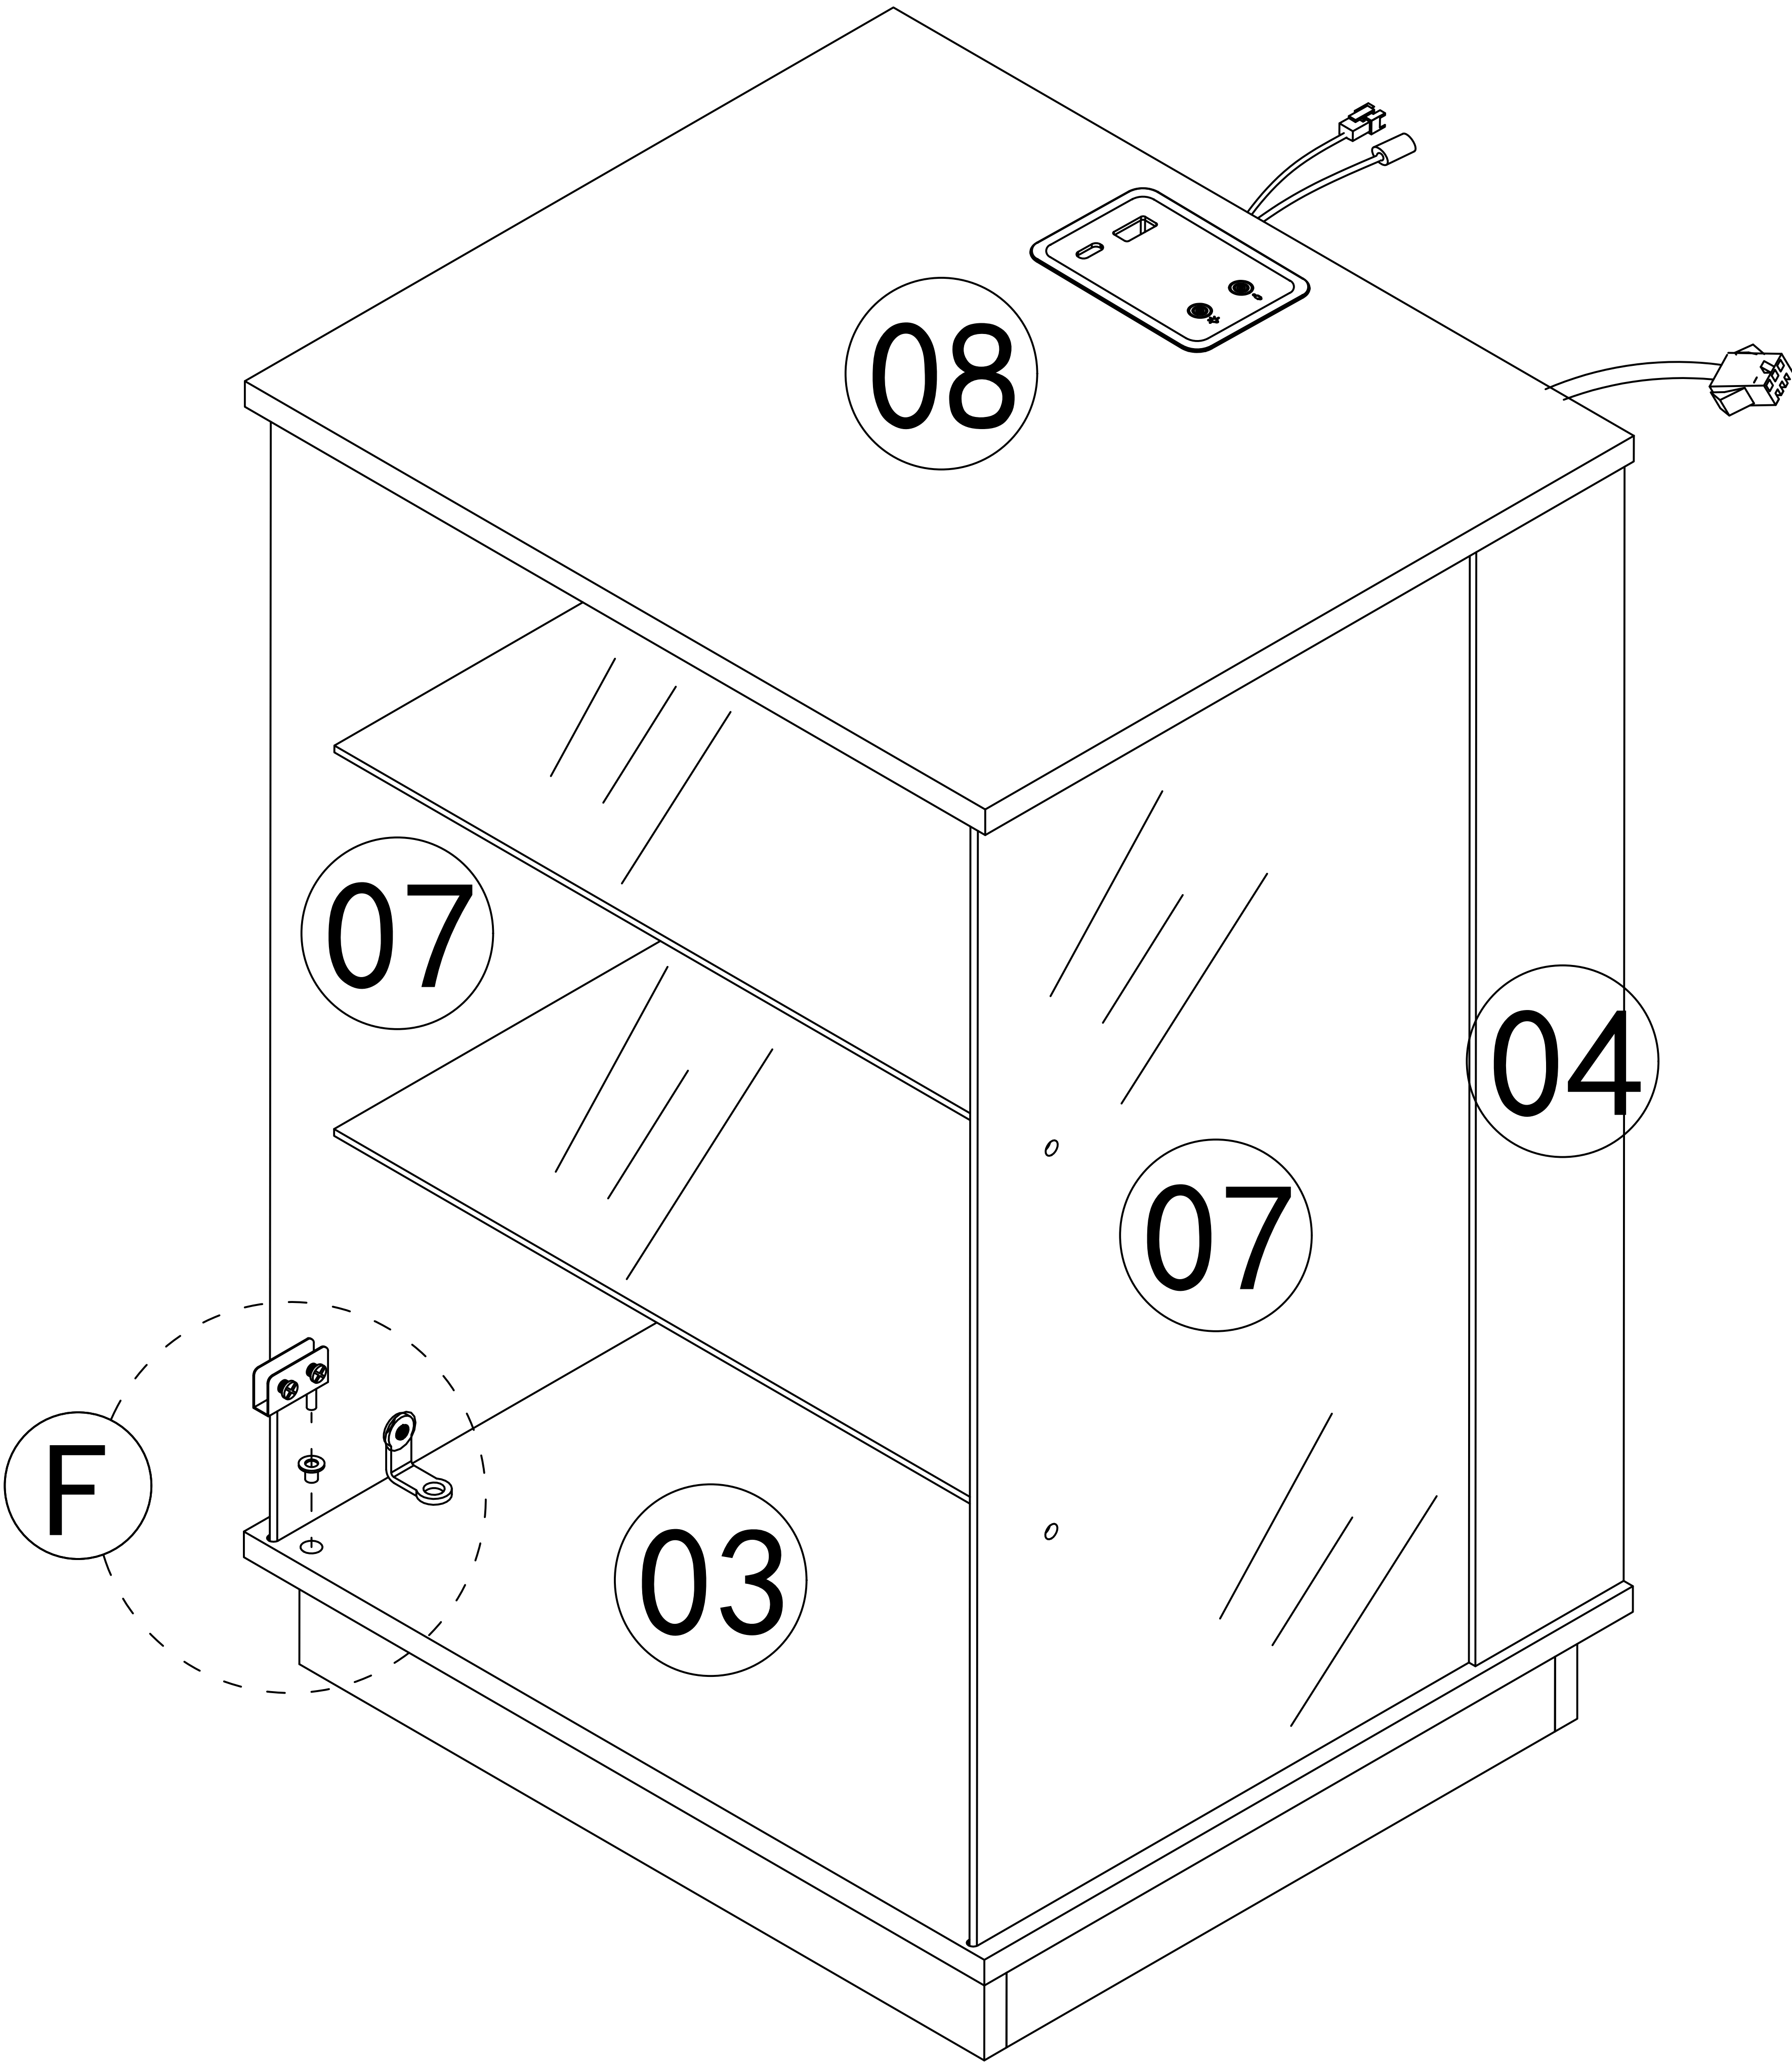

Step 18


Pay attention to the direction of the door hinge during installation

F




x1


When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.

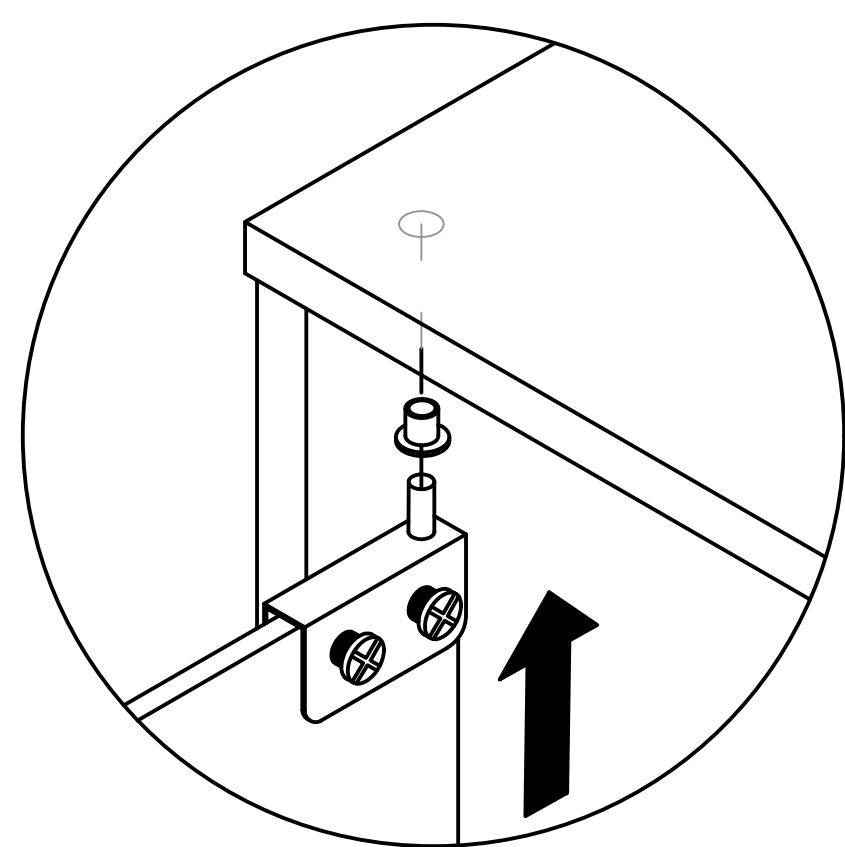

first

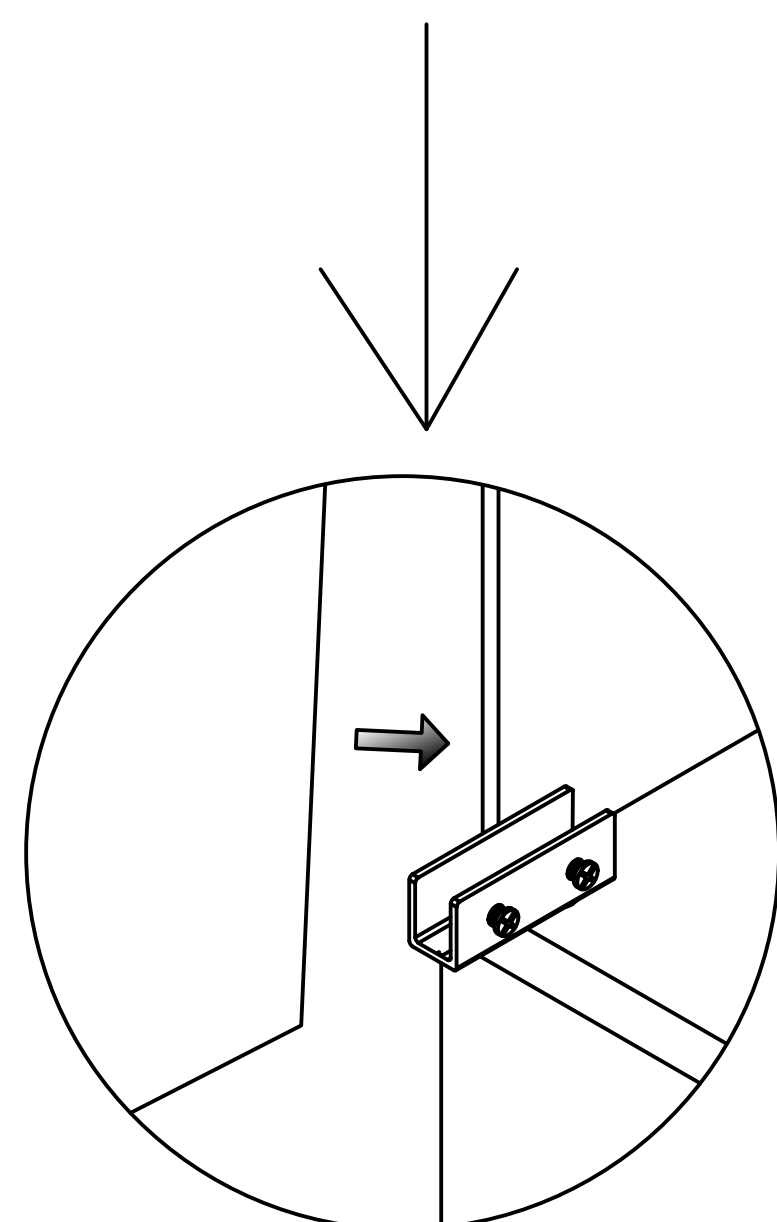


second

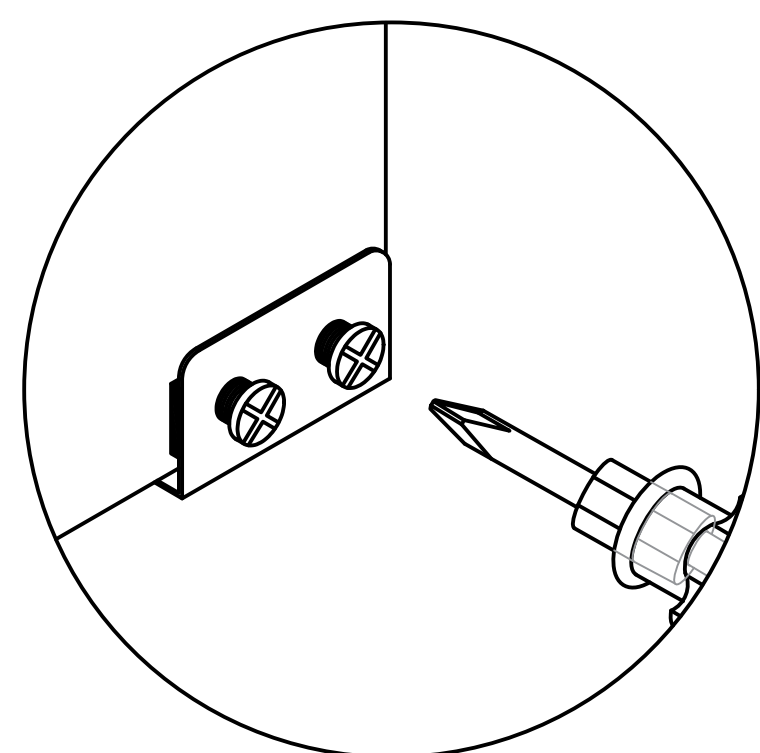

third


Locking screw

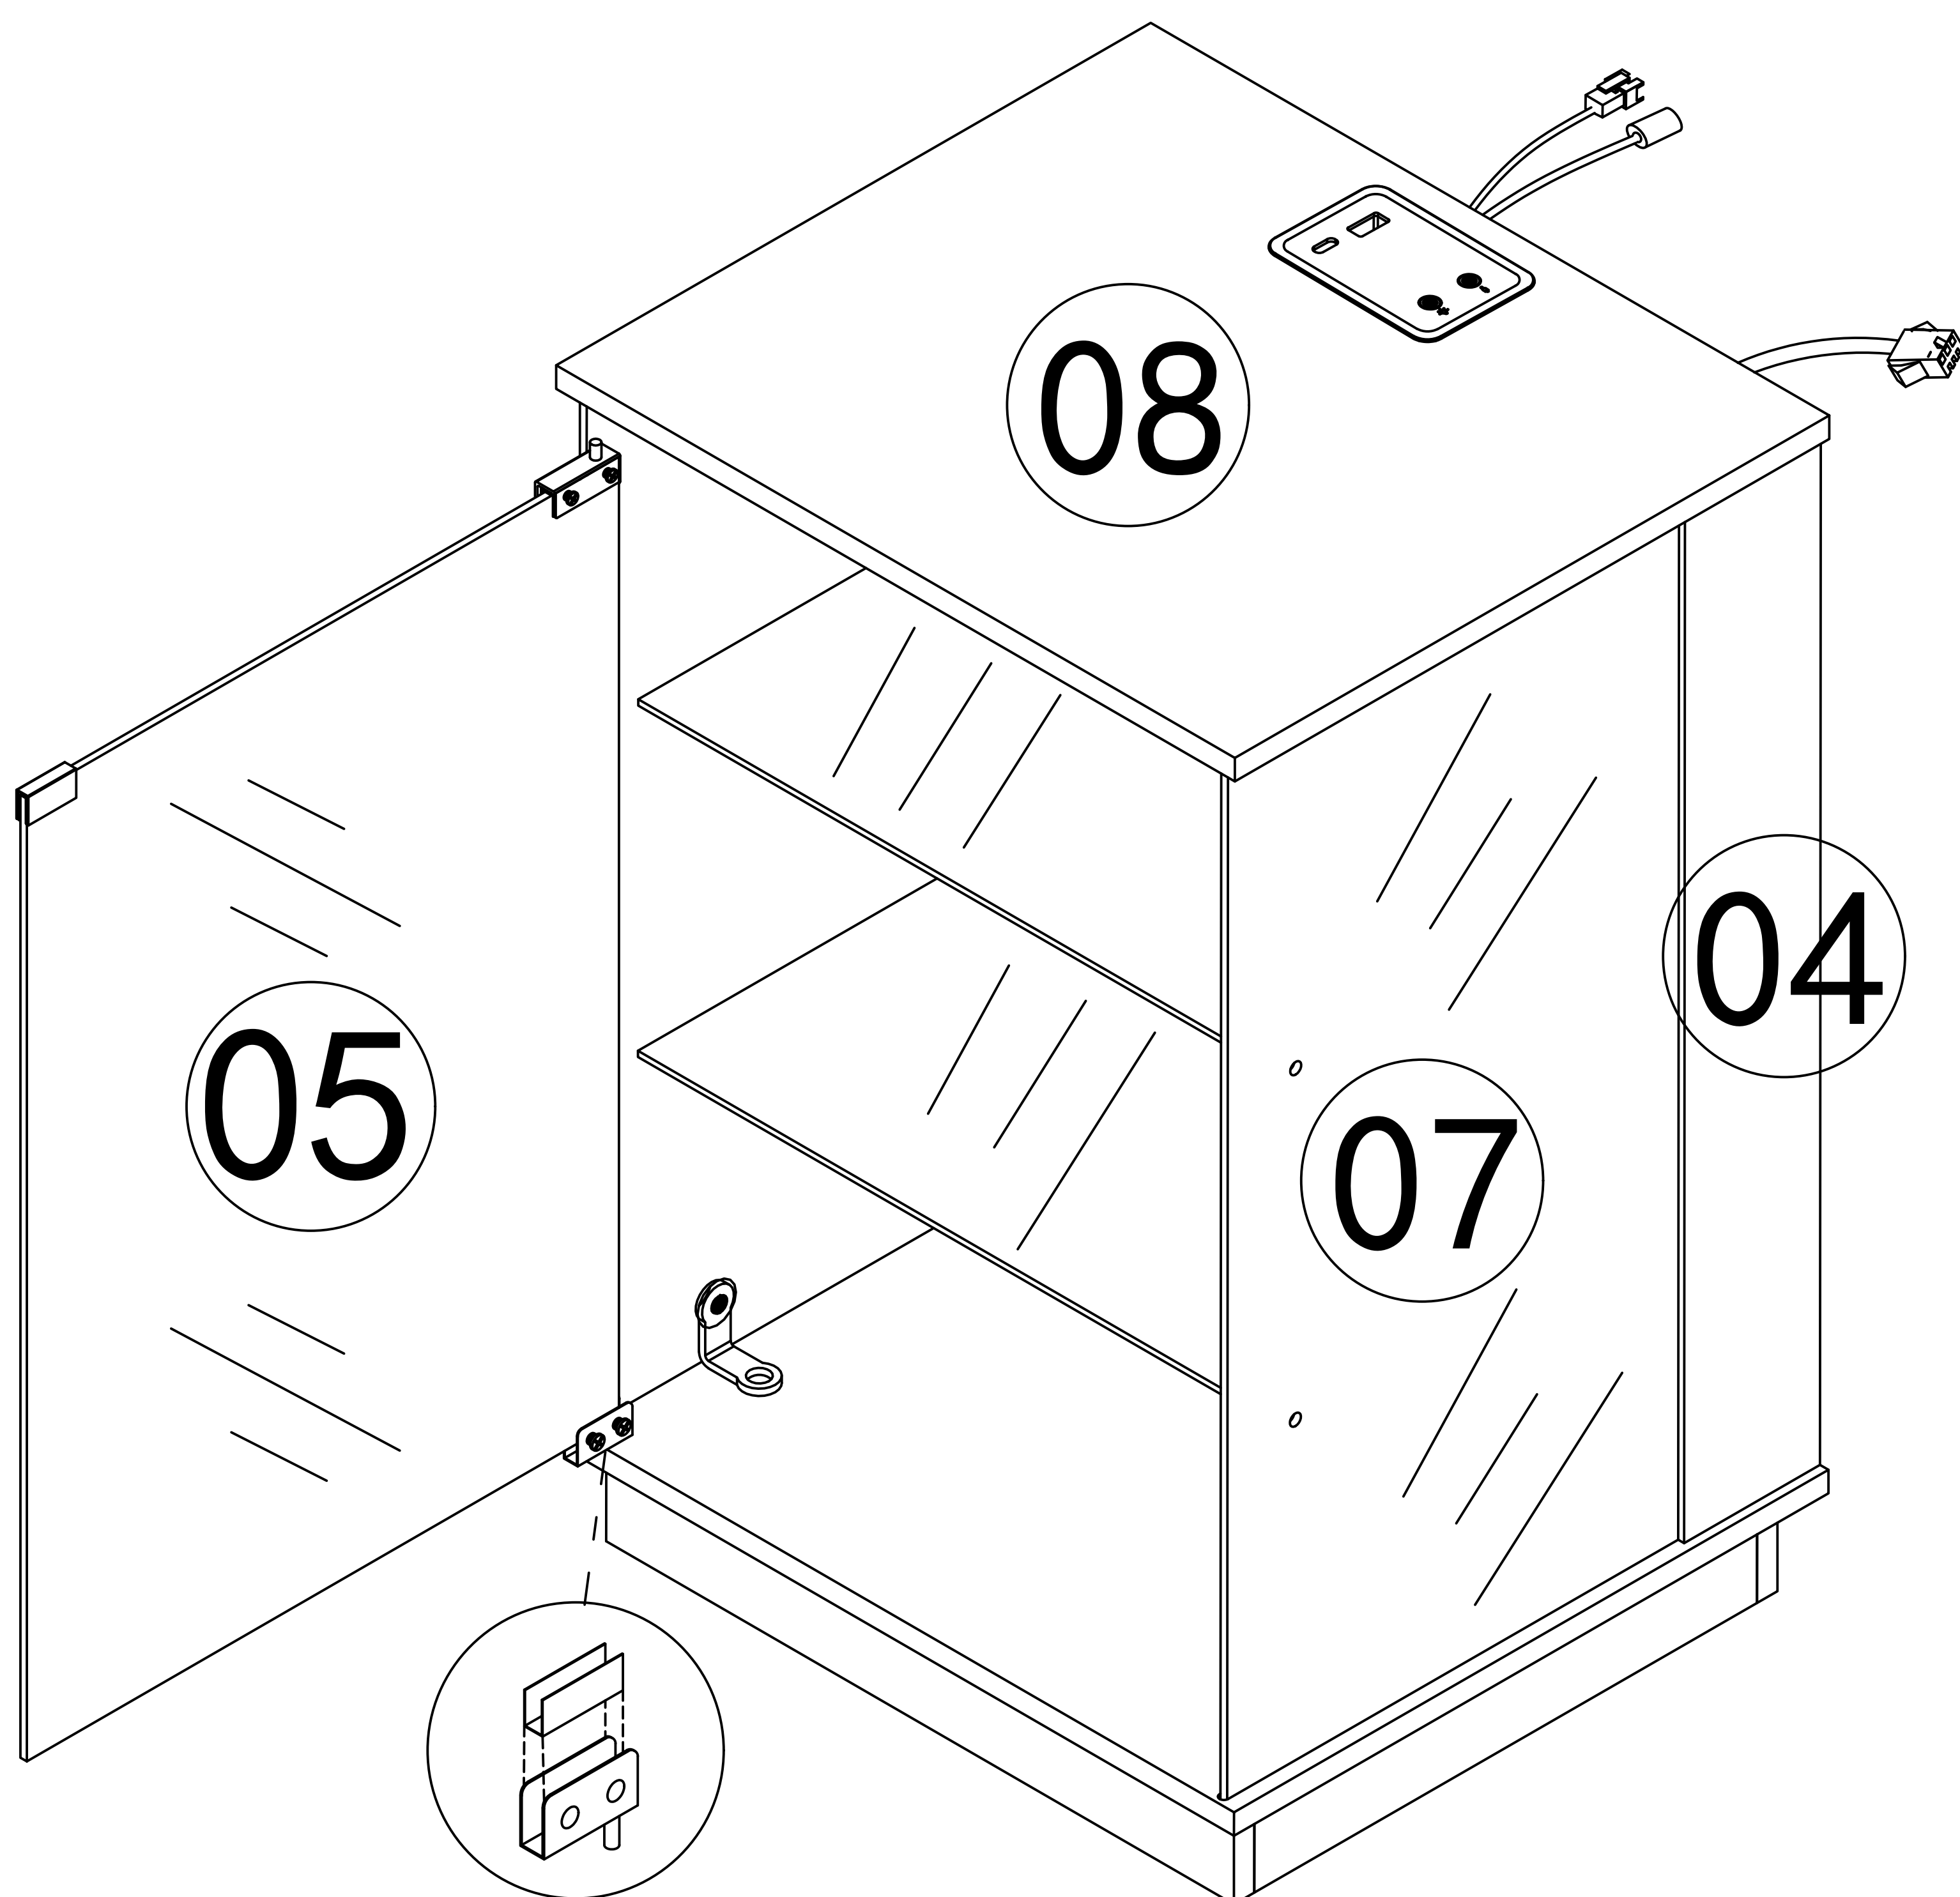


After aligning the glass door, tighten the screws to secure it.



Step 19

G

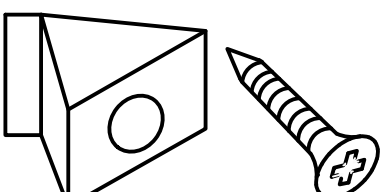x8

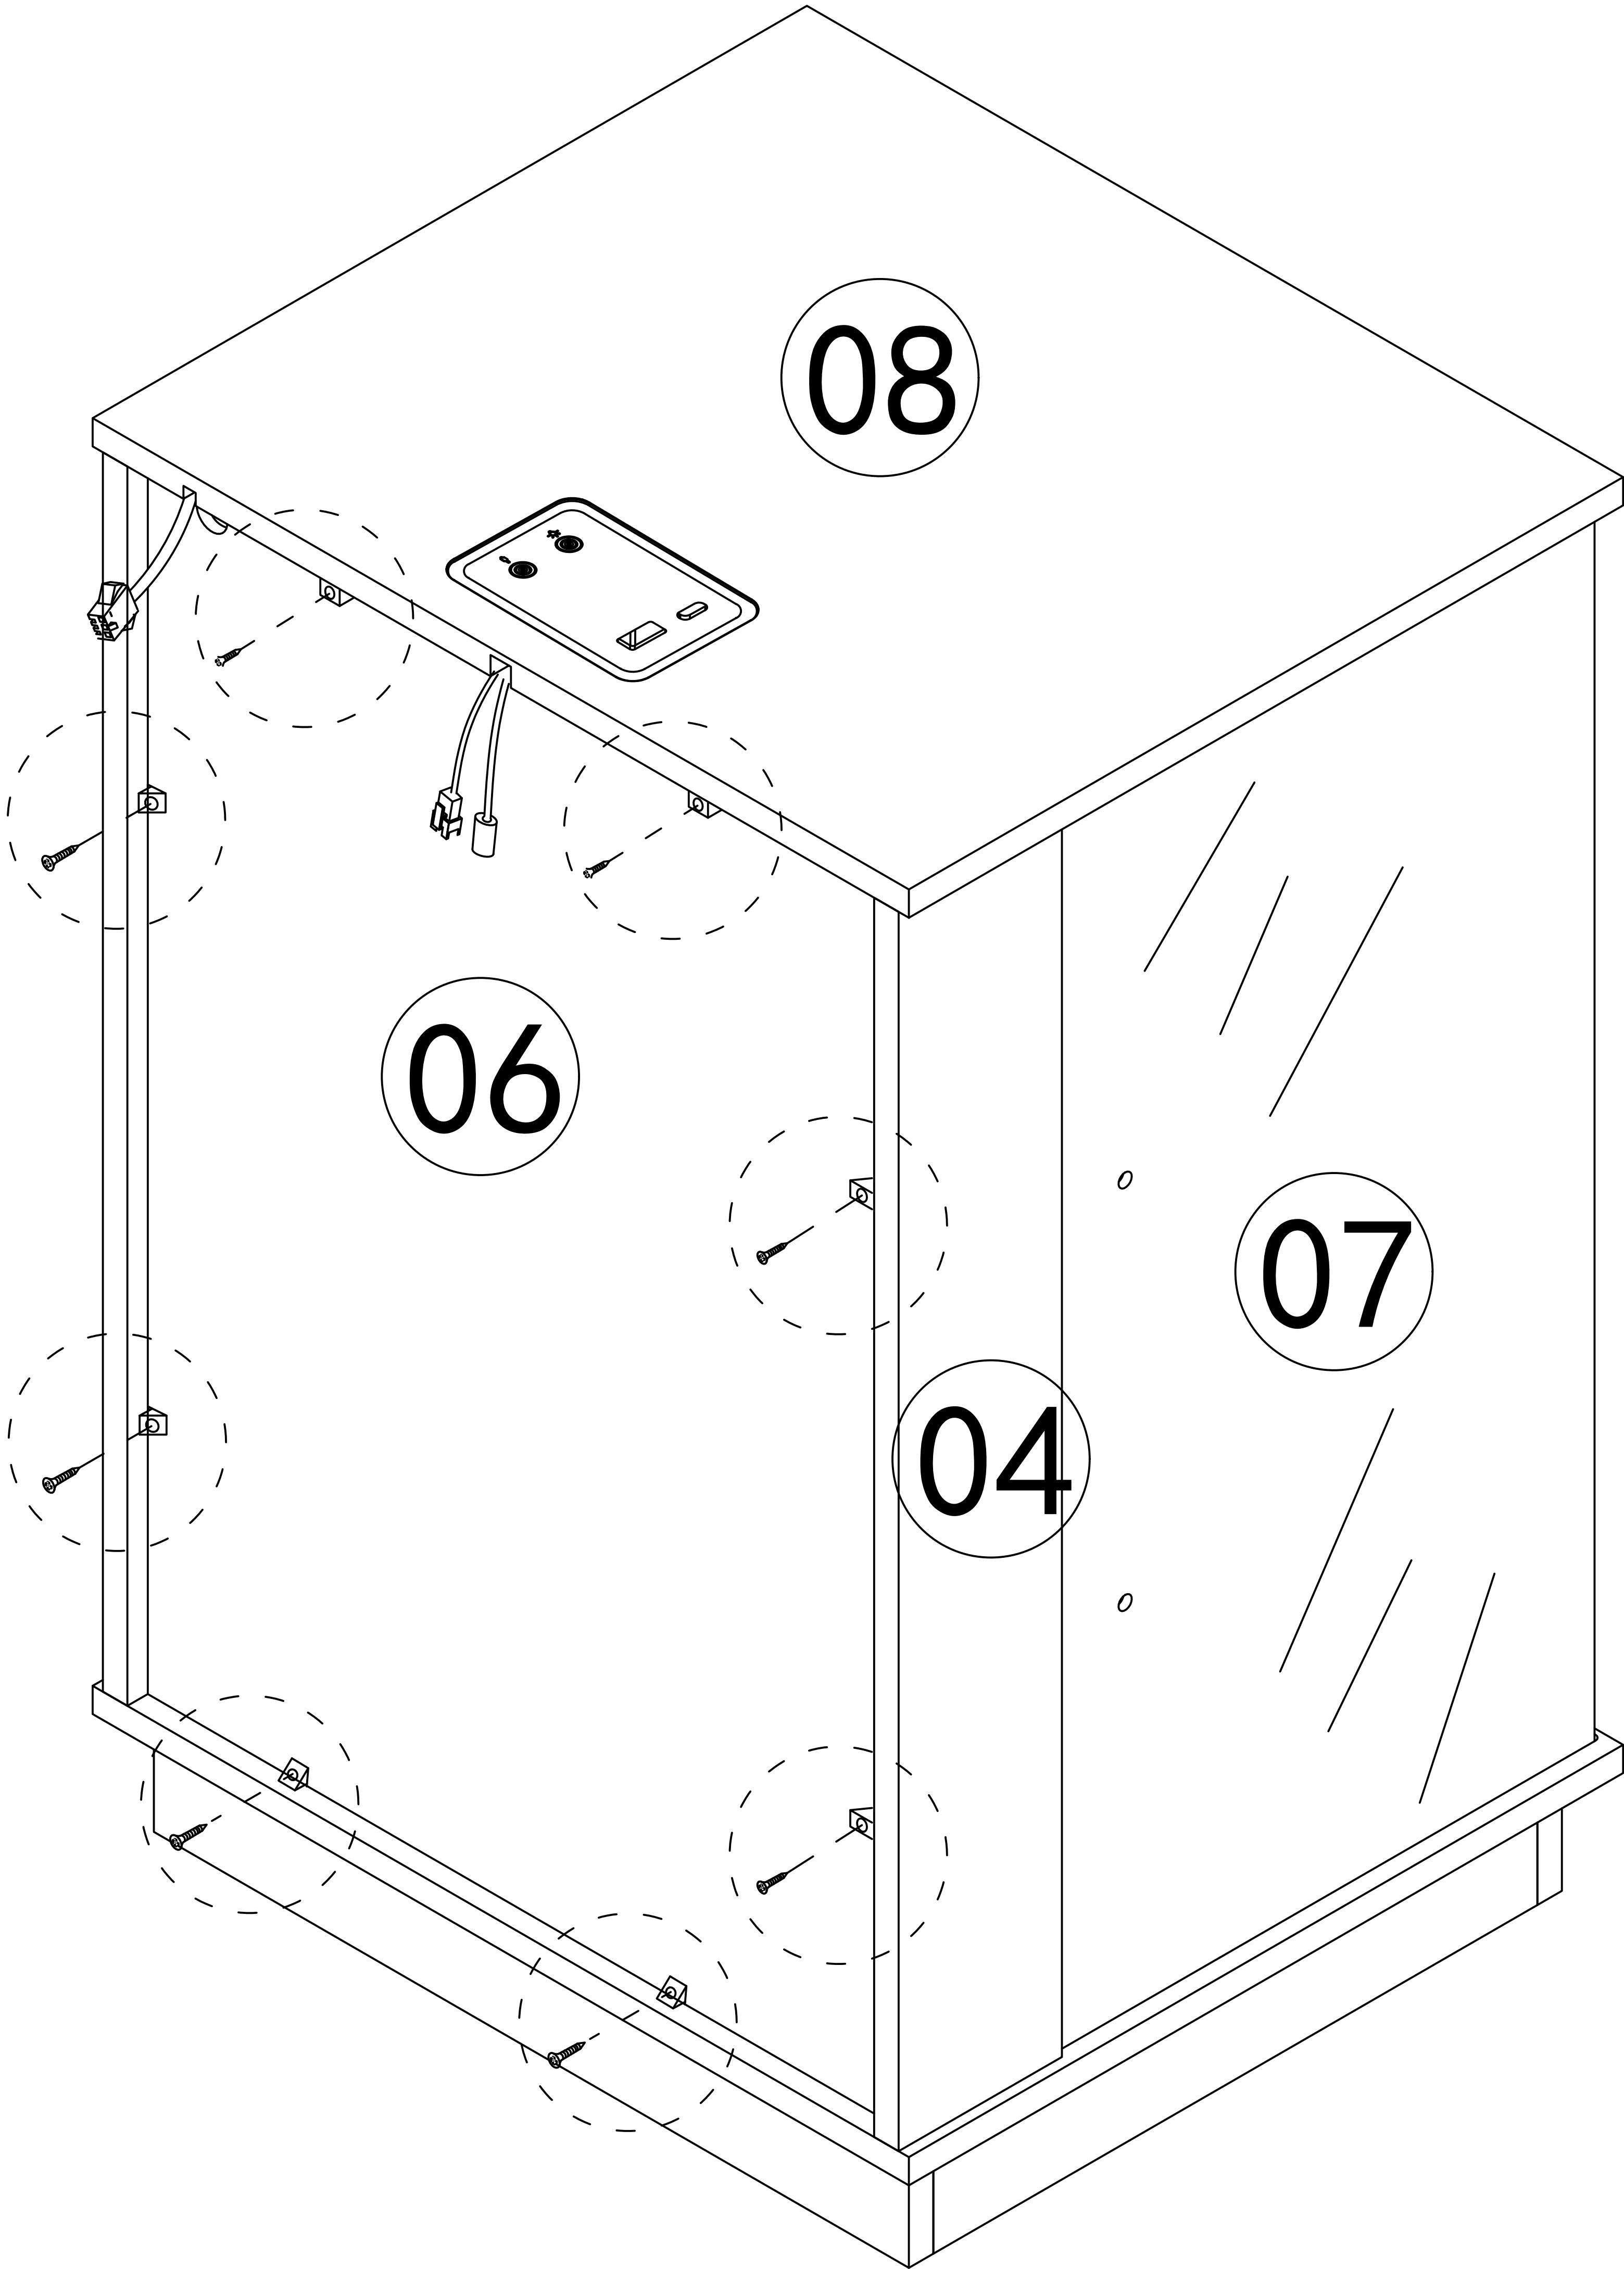


Step 20

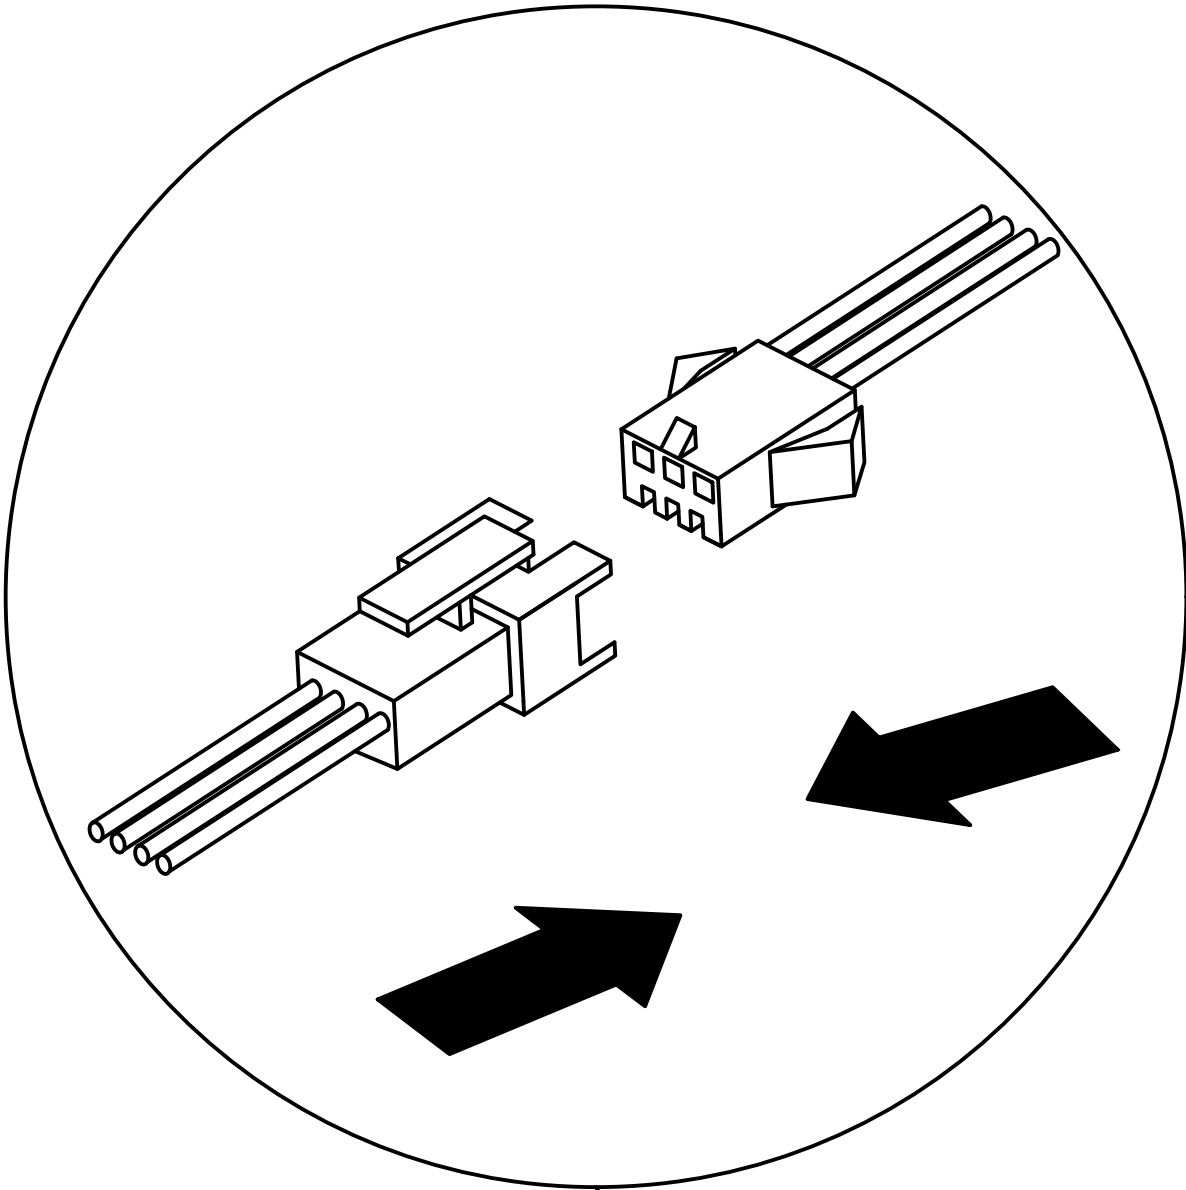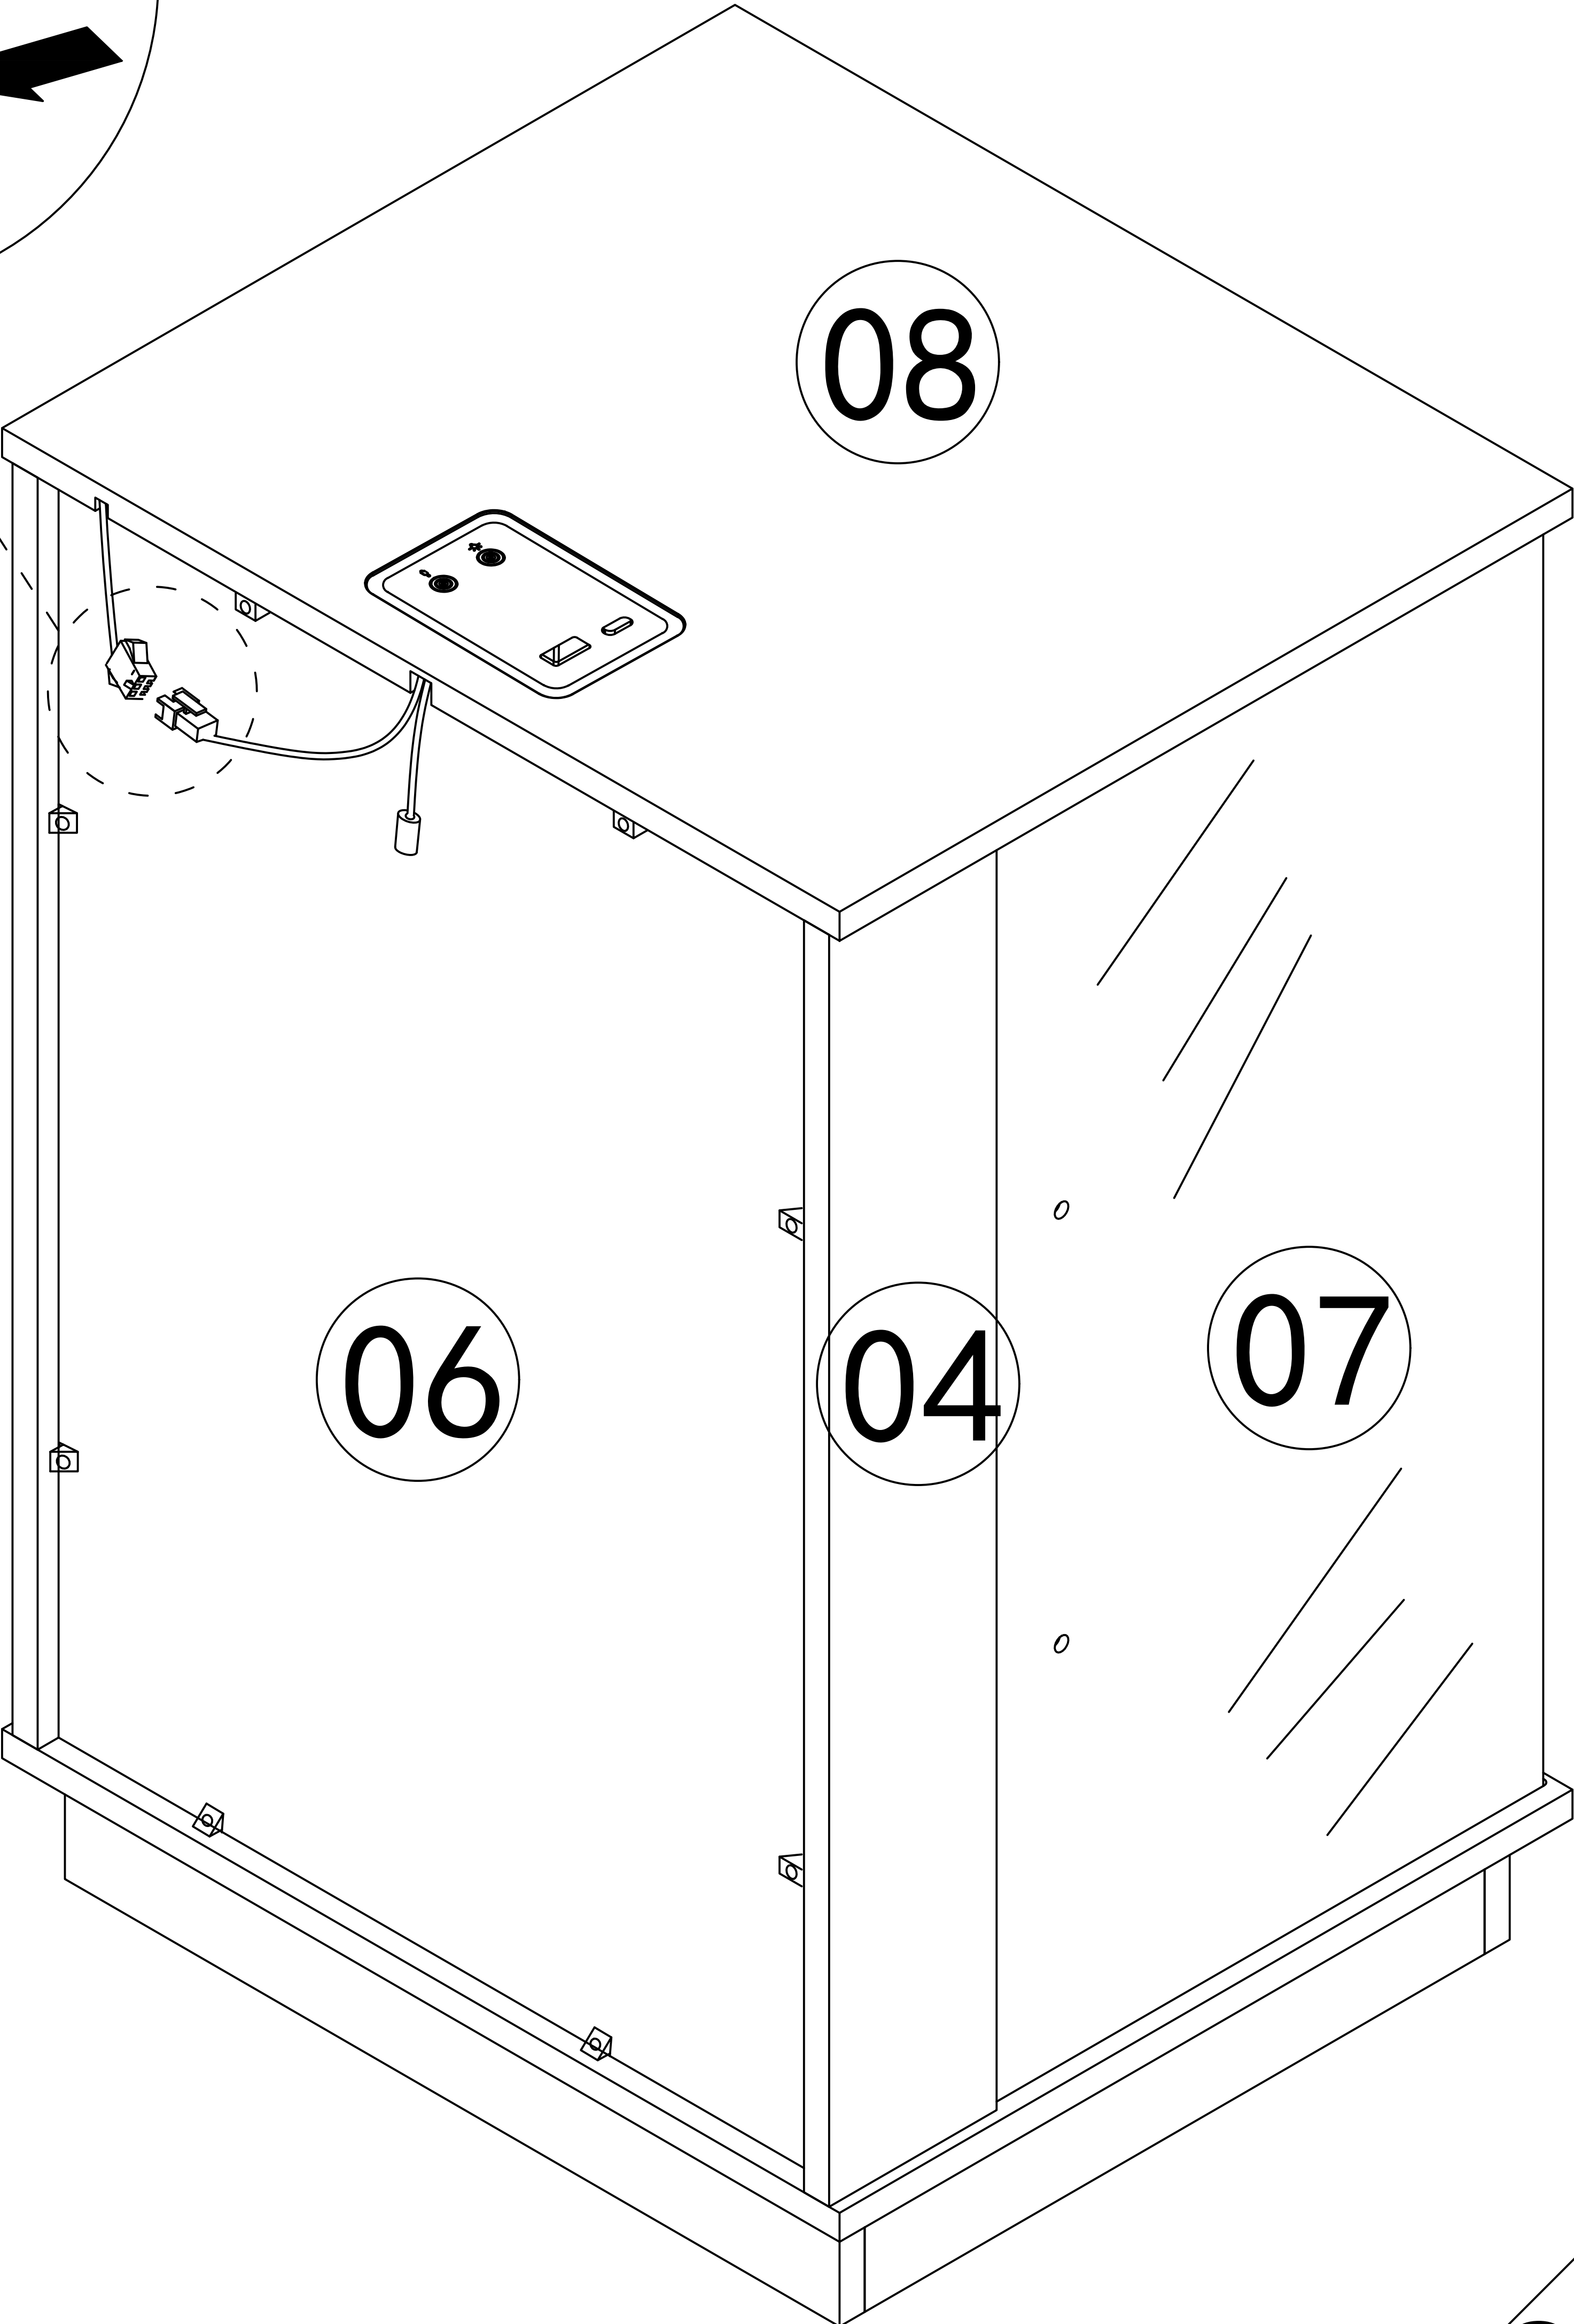


Step 21

I

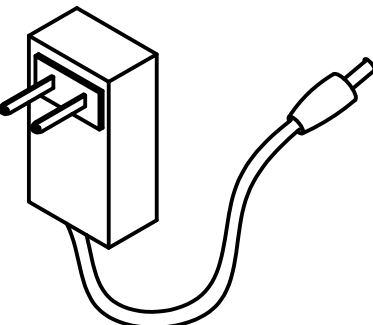

x1

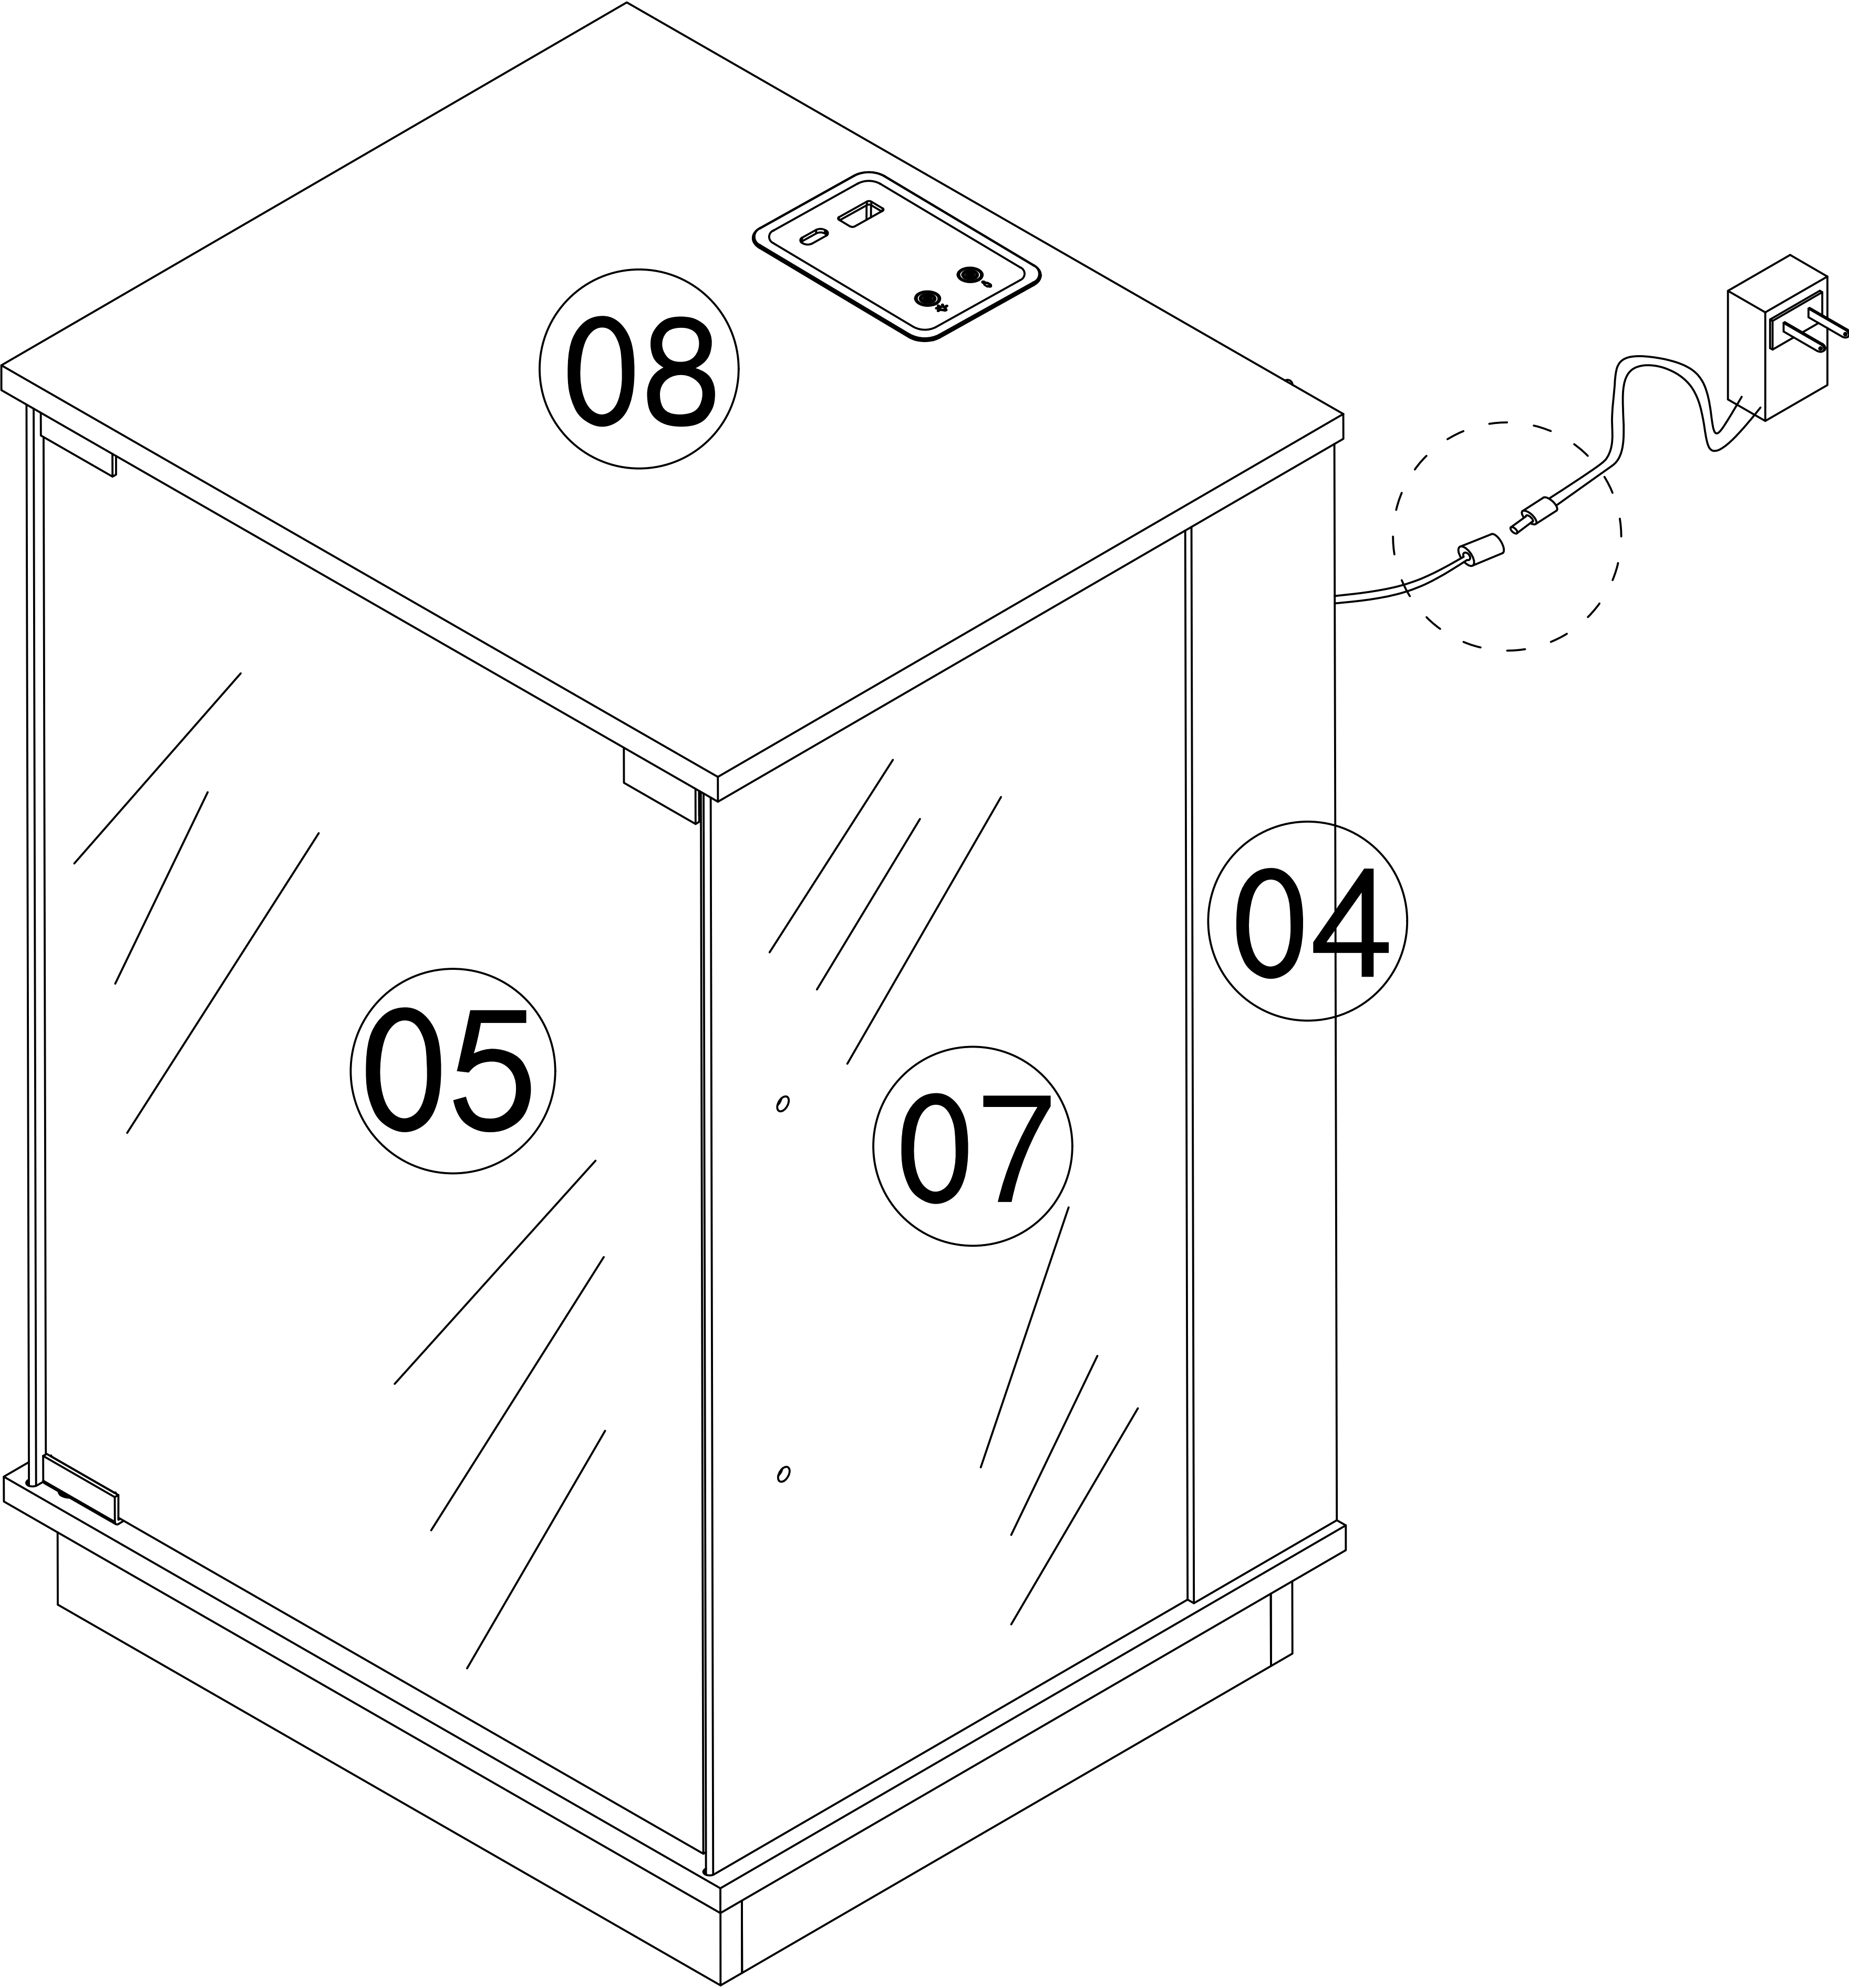

User’s Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

If bubbles appear on the panel, remove the protective film.

Introduction

The box is an intelligent controller.

It has 1 USB output port 1 Type-c port, with 2 touch buttons ,

it can and turn ON/OFF the induction function,

turn ON/OFF the light,adjust the light luminance, and change light colors.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.


- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to switch dynamic phantom colors and turn ON/OFF the induction function.

- i. Single Click:Switch to Phantom Mode, with 5 magical color transformations available.
- ii. Human Body Sensing Control:Long Press (3+ seconds): Turn on The key press indicator light is on.)
- Long Press (3+ seconds): Turn off (The key press indicator light is off.)

By default, the human body sensing is enabled upon initial power-on, and the indicator light is on.

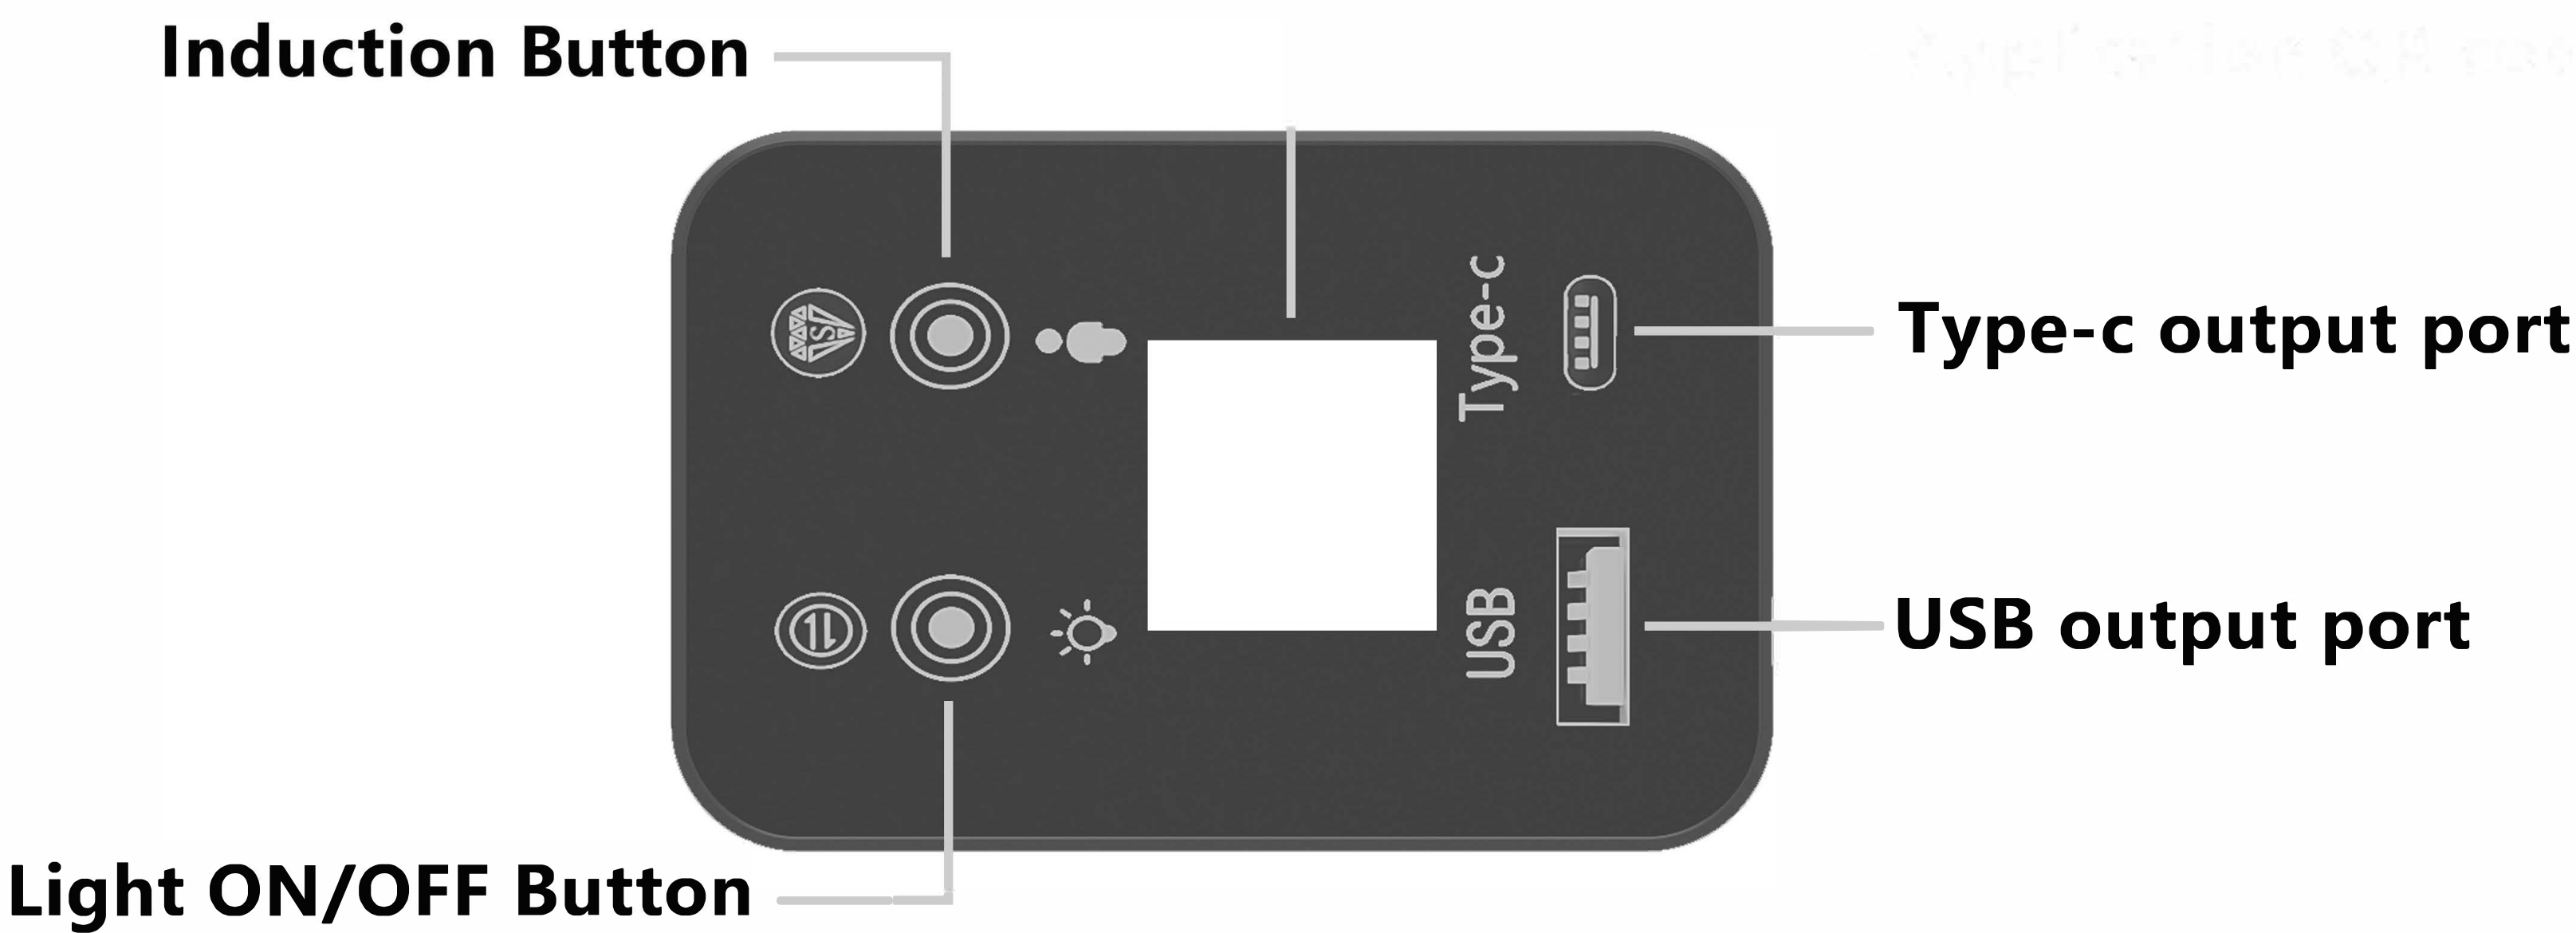


 ATTENTION PLEASE

- 1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
- 2. If you have any questions when installing, please feel free to contact us. Thank you.


Smart Box Plug Power Off

Select the corresponding device to download.

Note: If the download fails,
please turn off the “Enhanced Protection”
in the Pure Mode settings of the device.

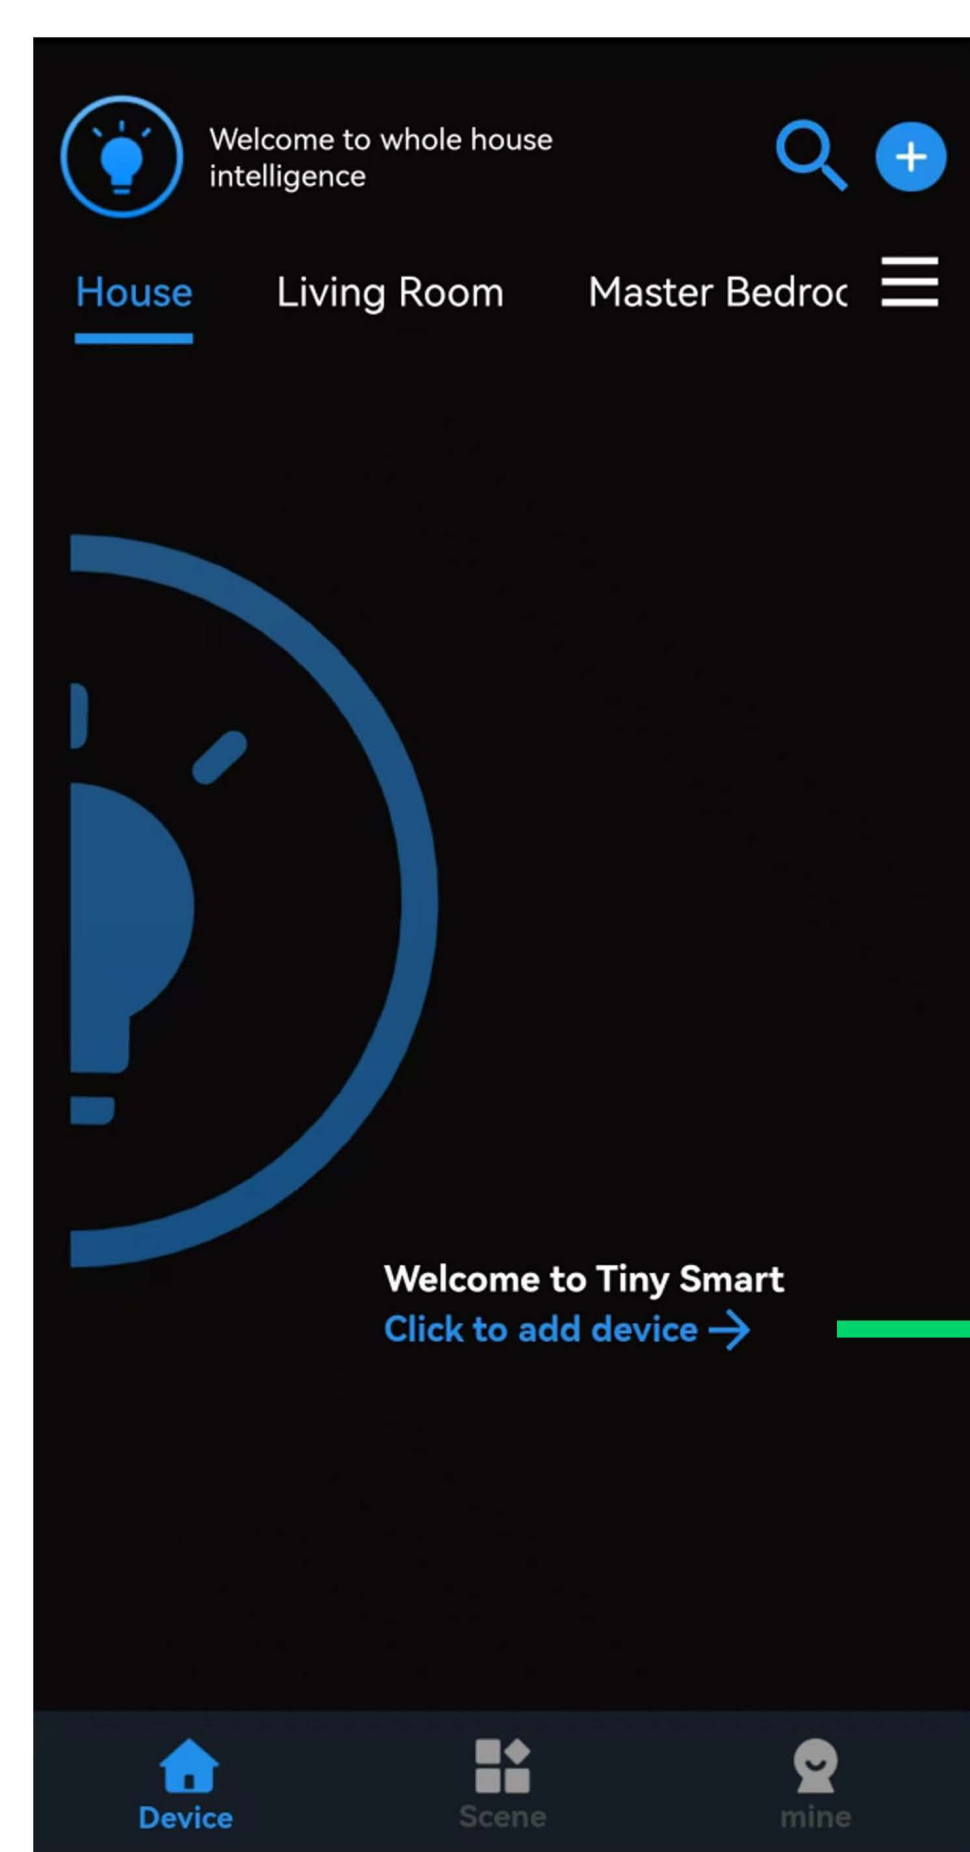


1

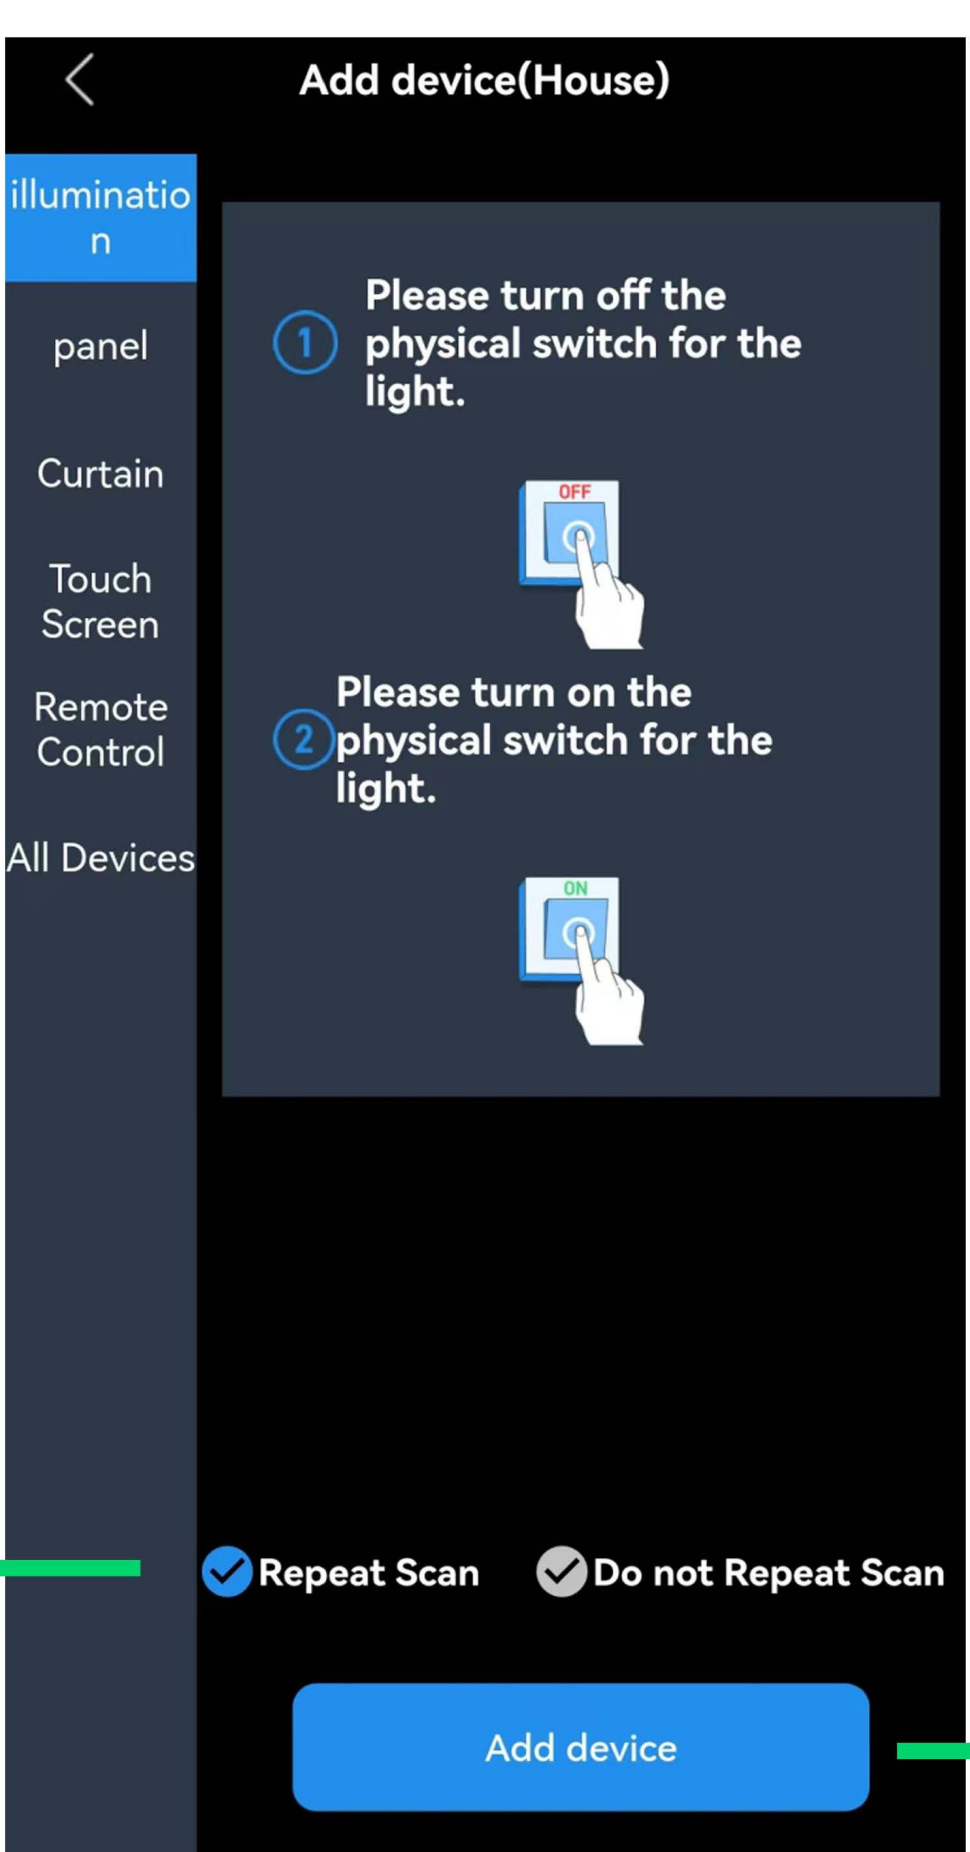


2

It turns blue after clicking

3

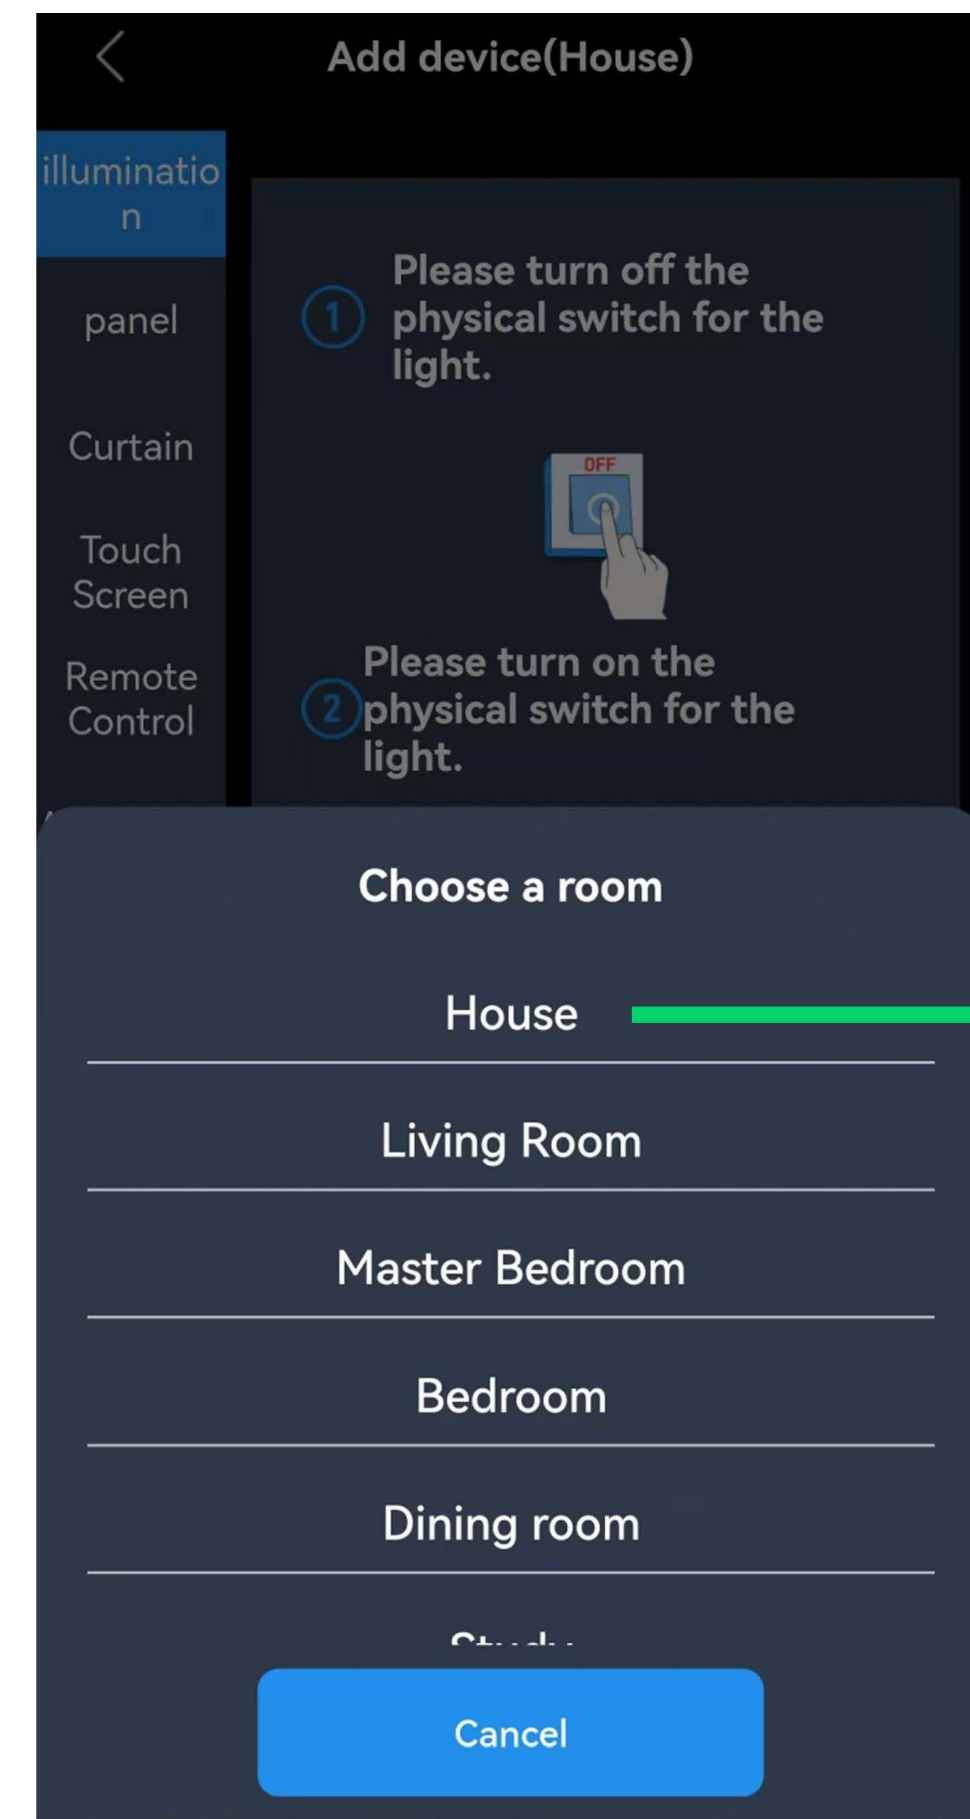

4

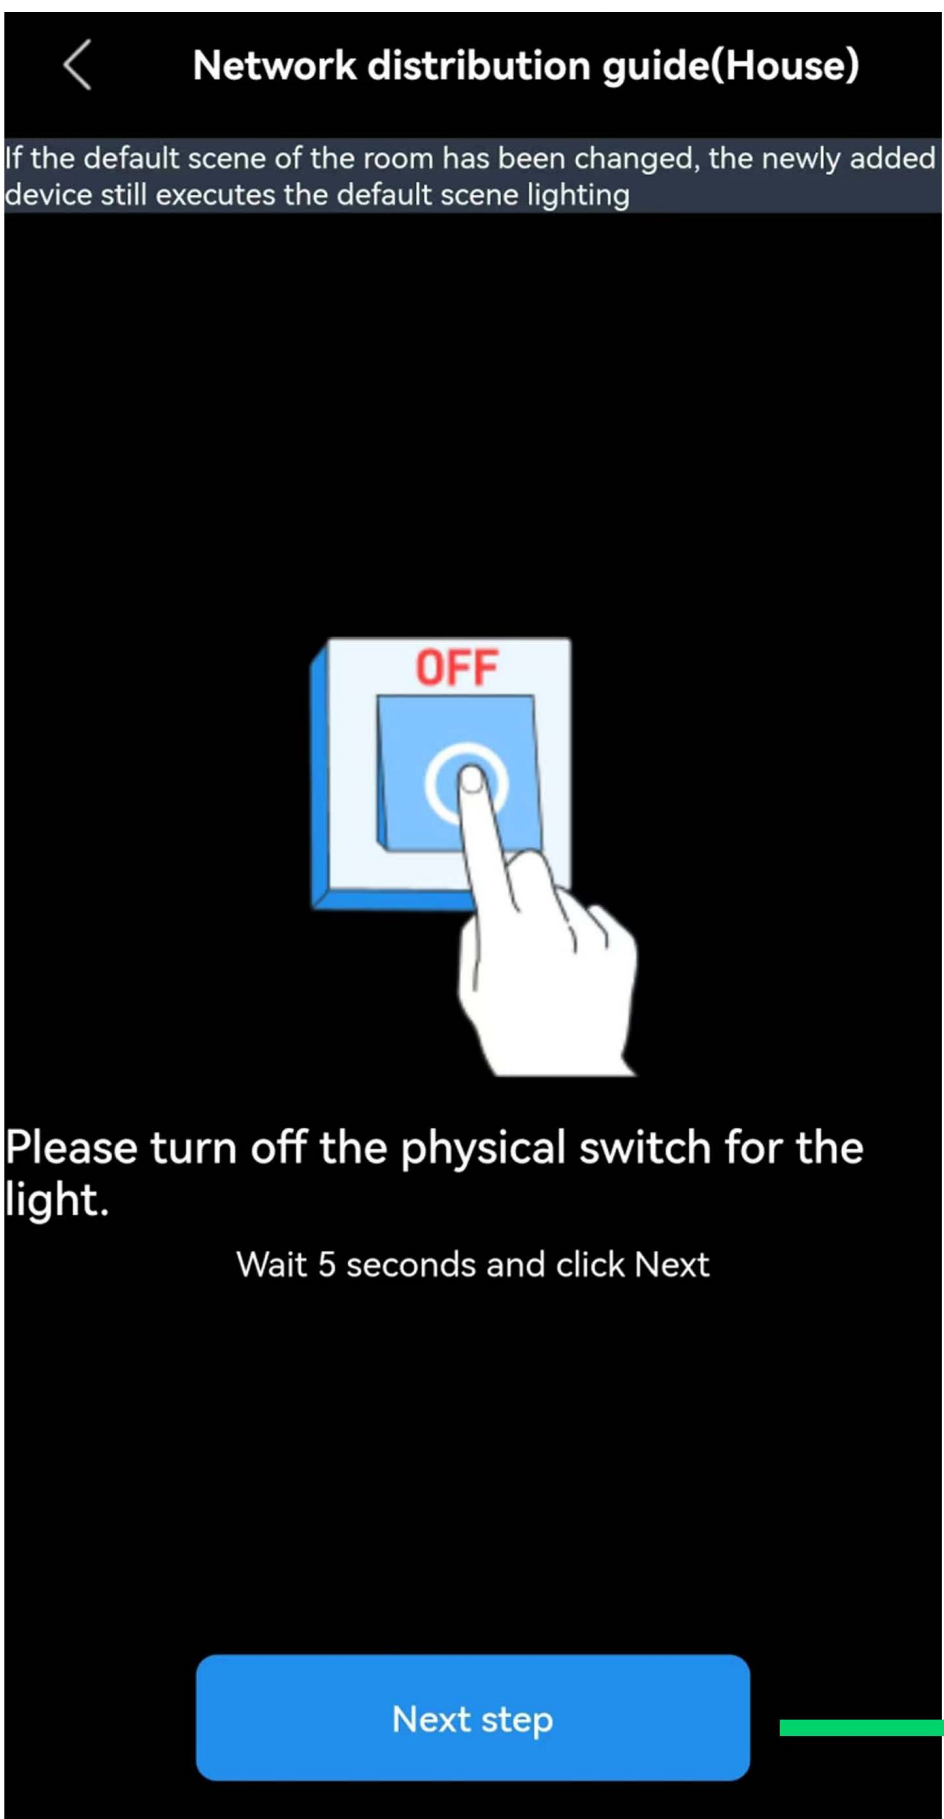


6


5 Unplug the smart box

7 Plug in the smart box power plug.


The appearance of this program icon indicates that the matching is complete

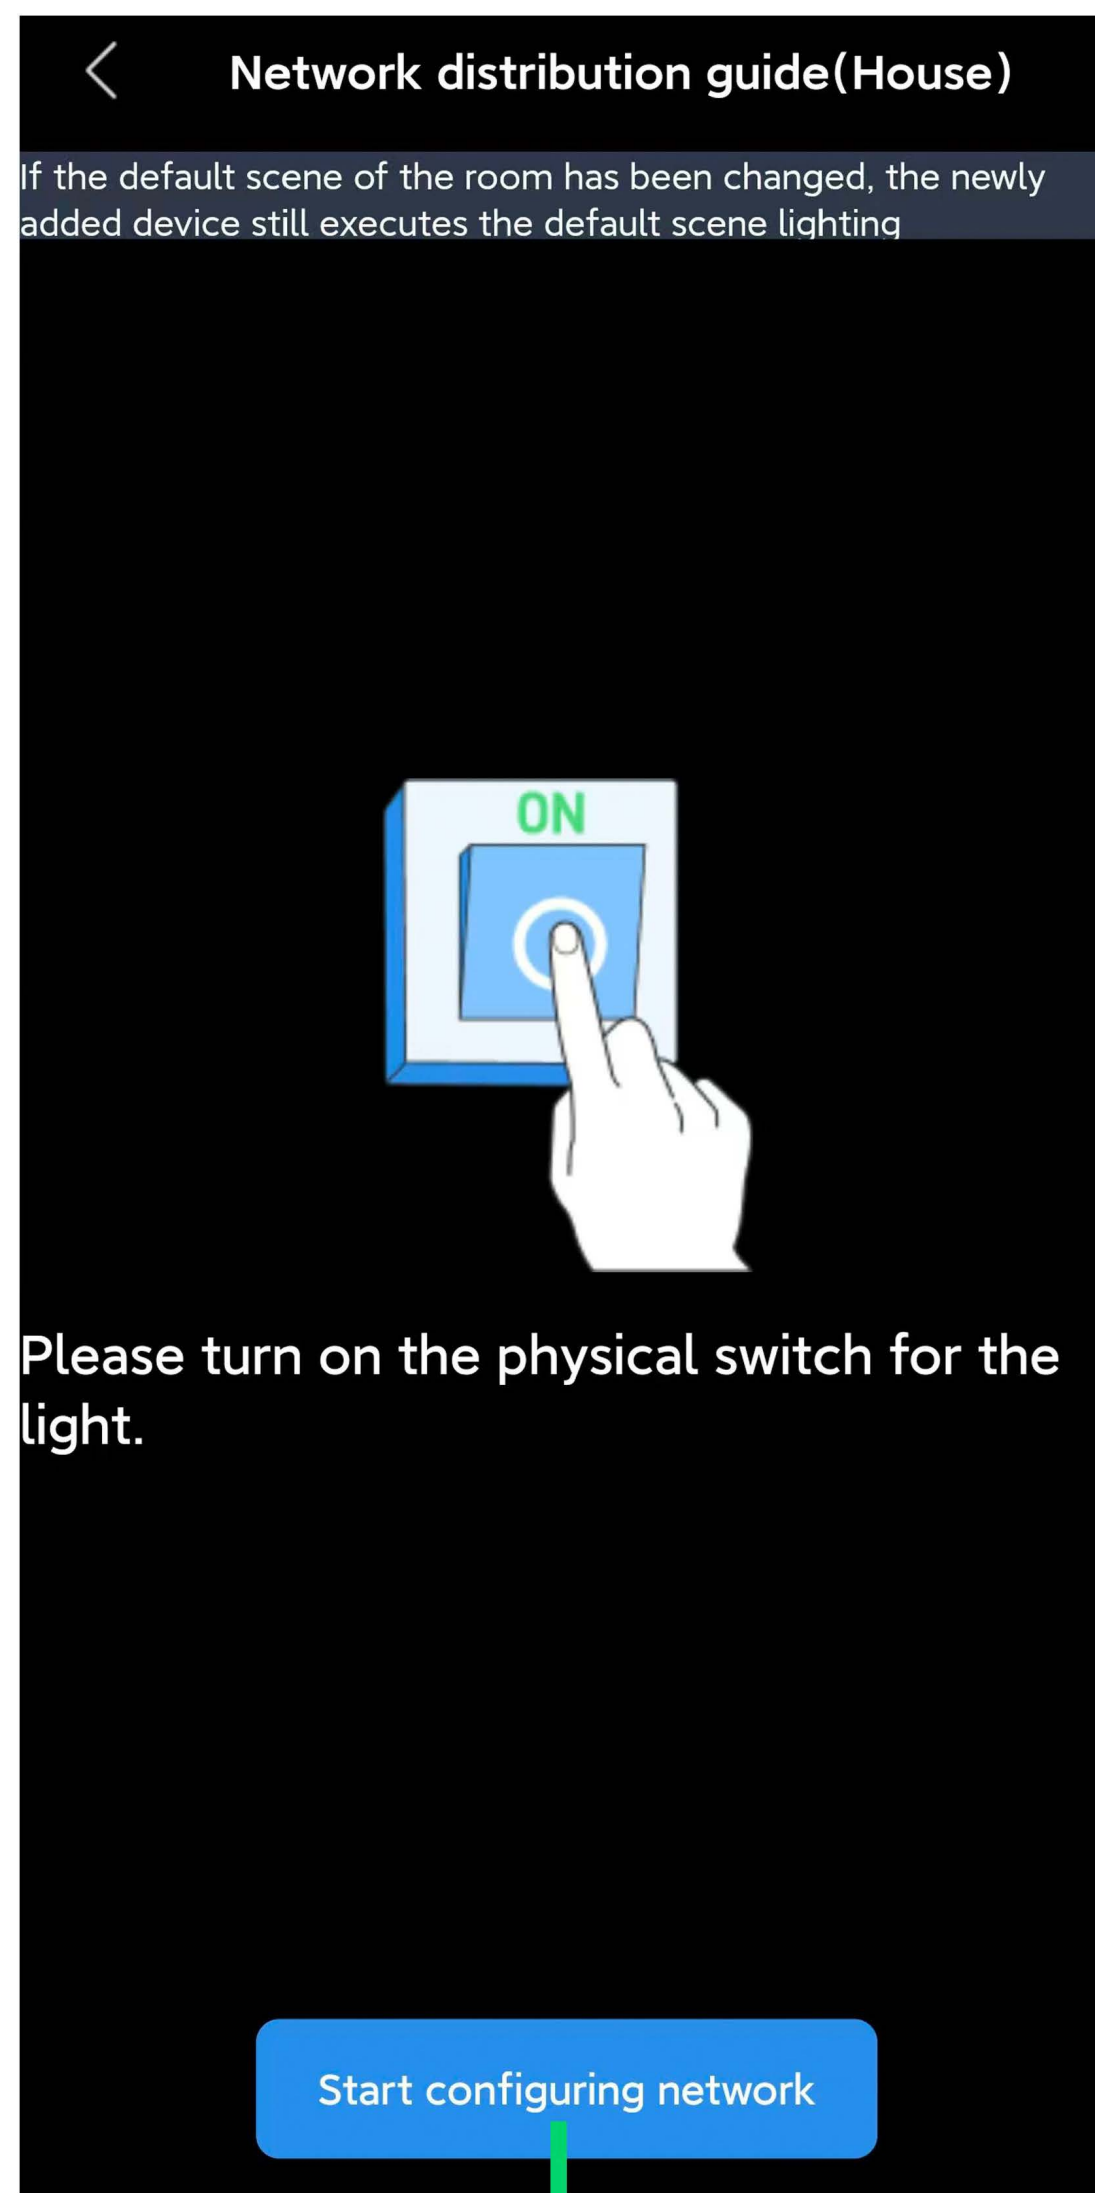


8

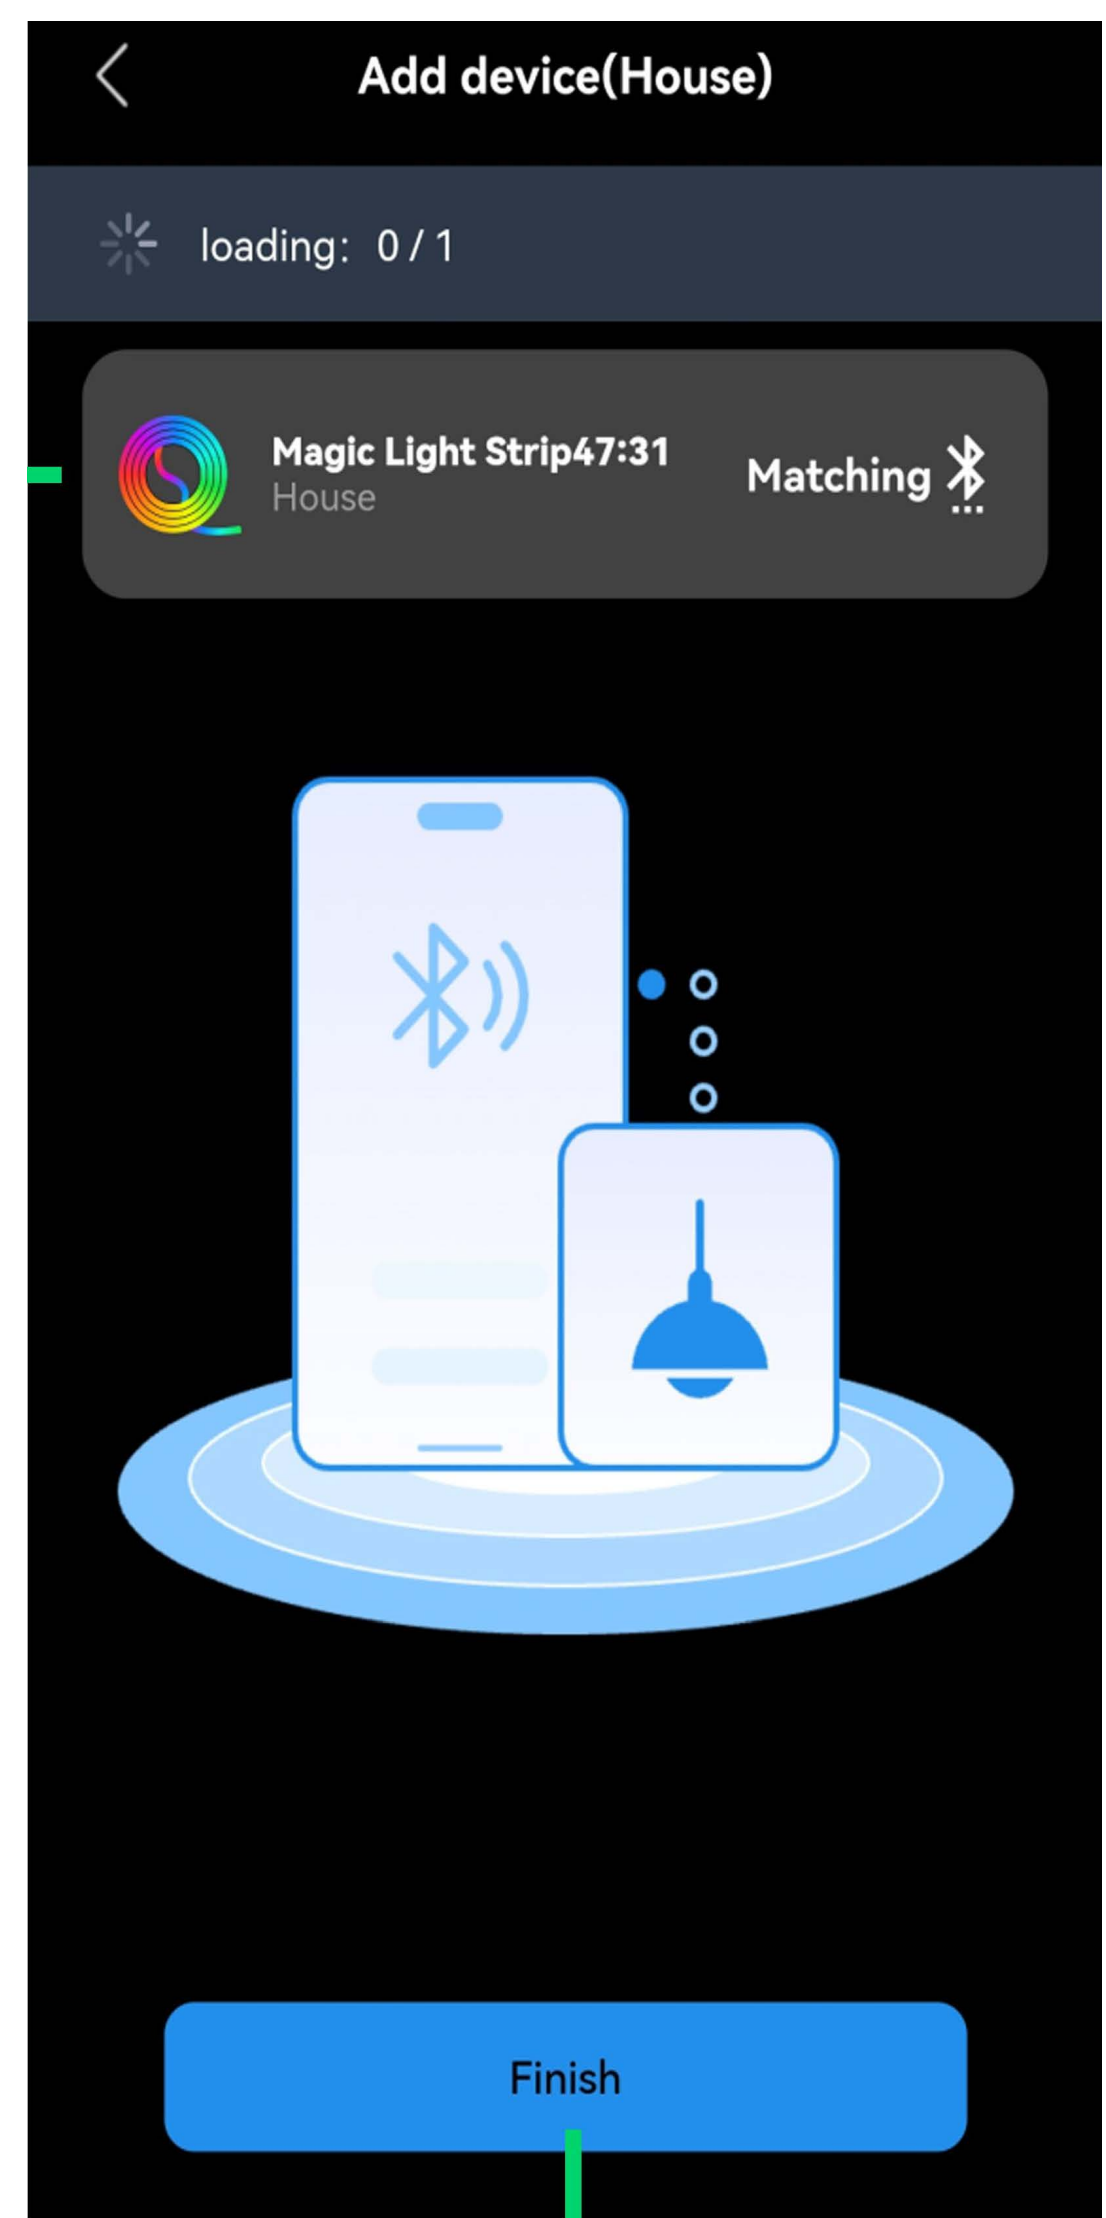

9

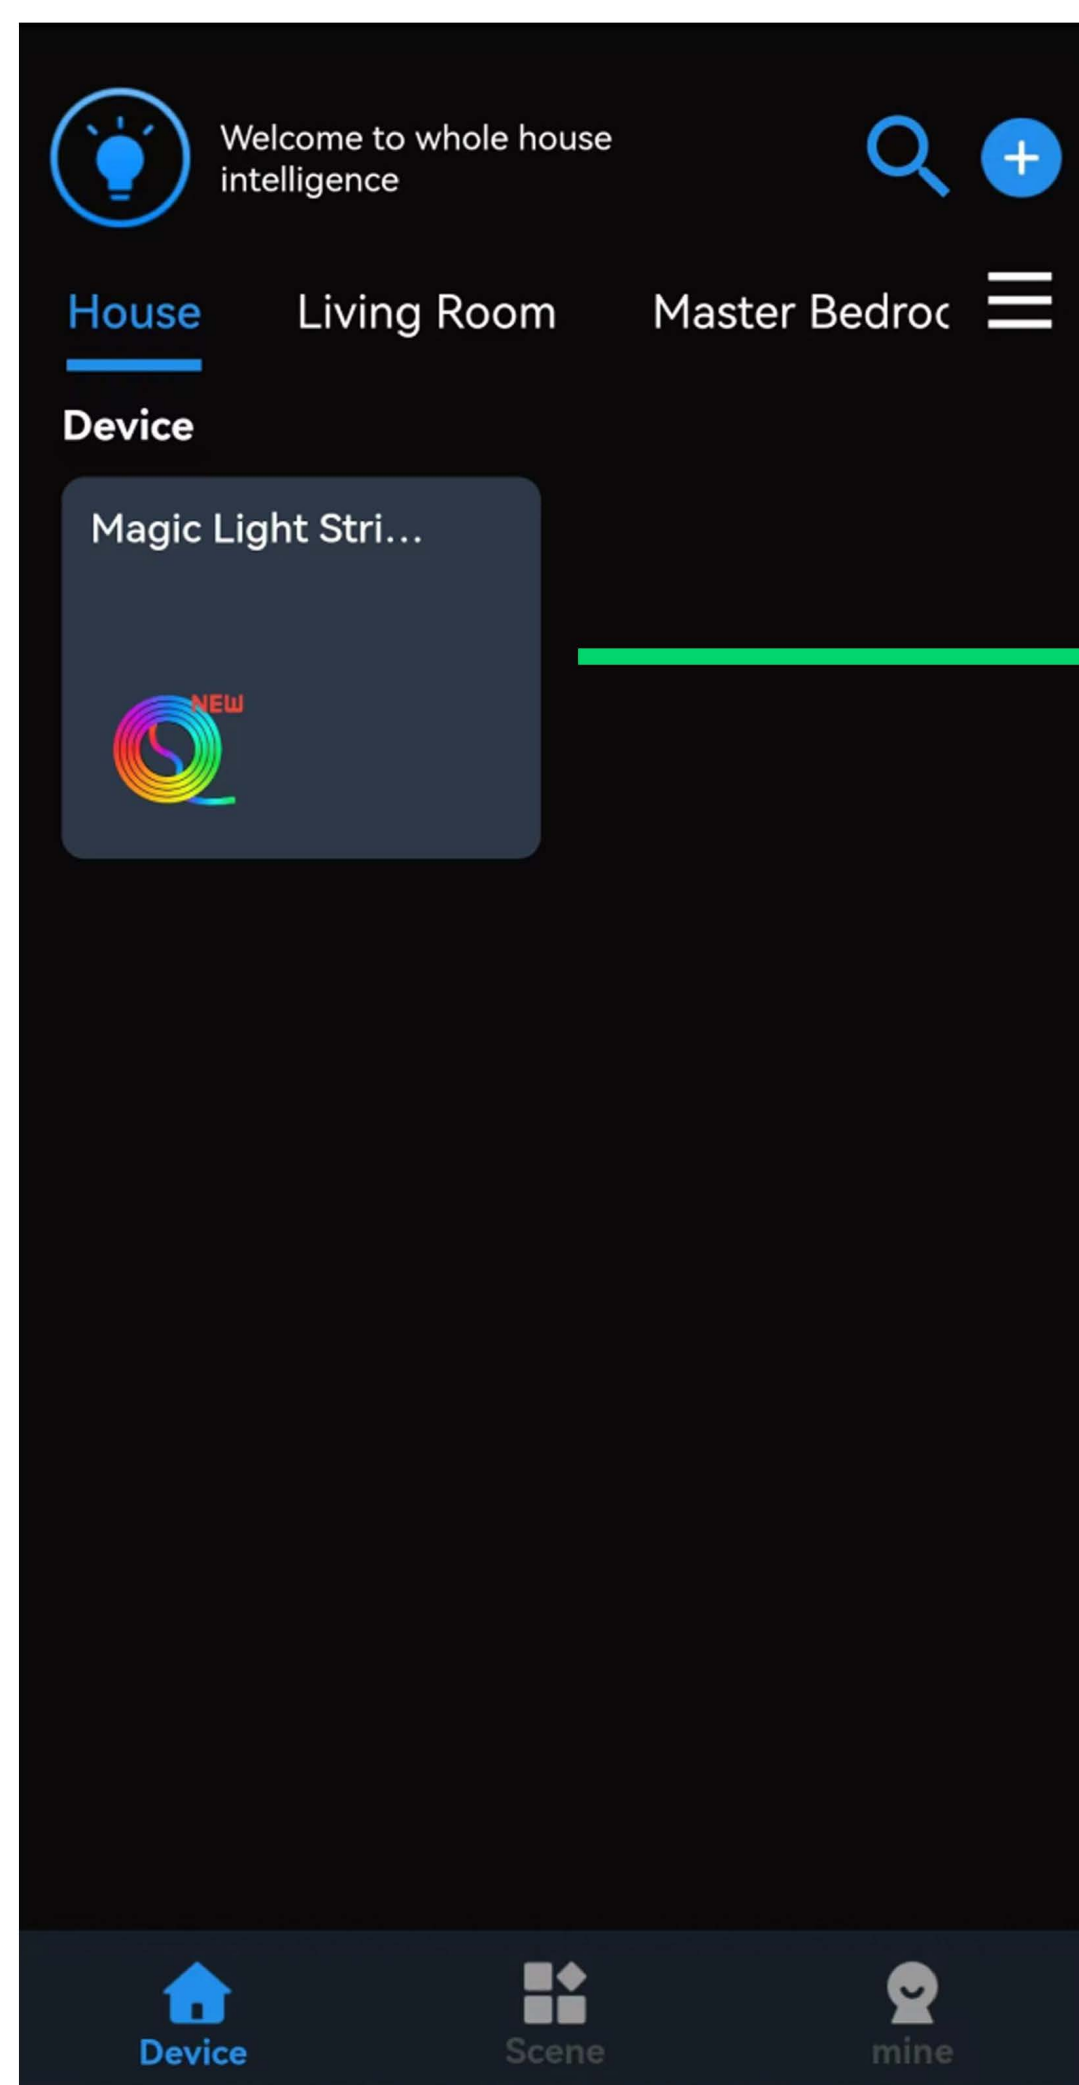

10

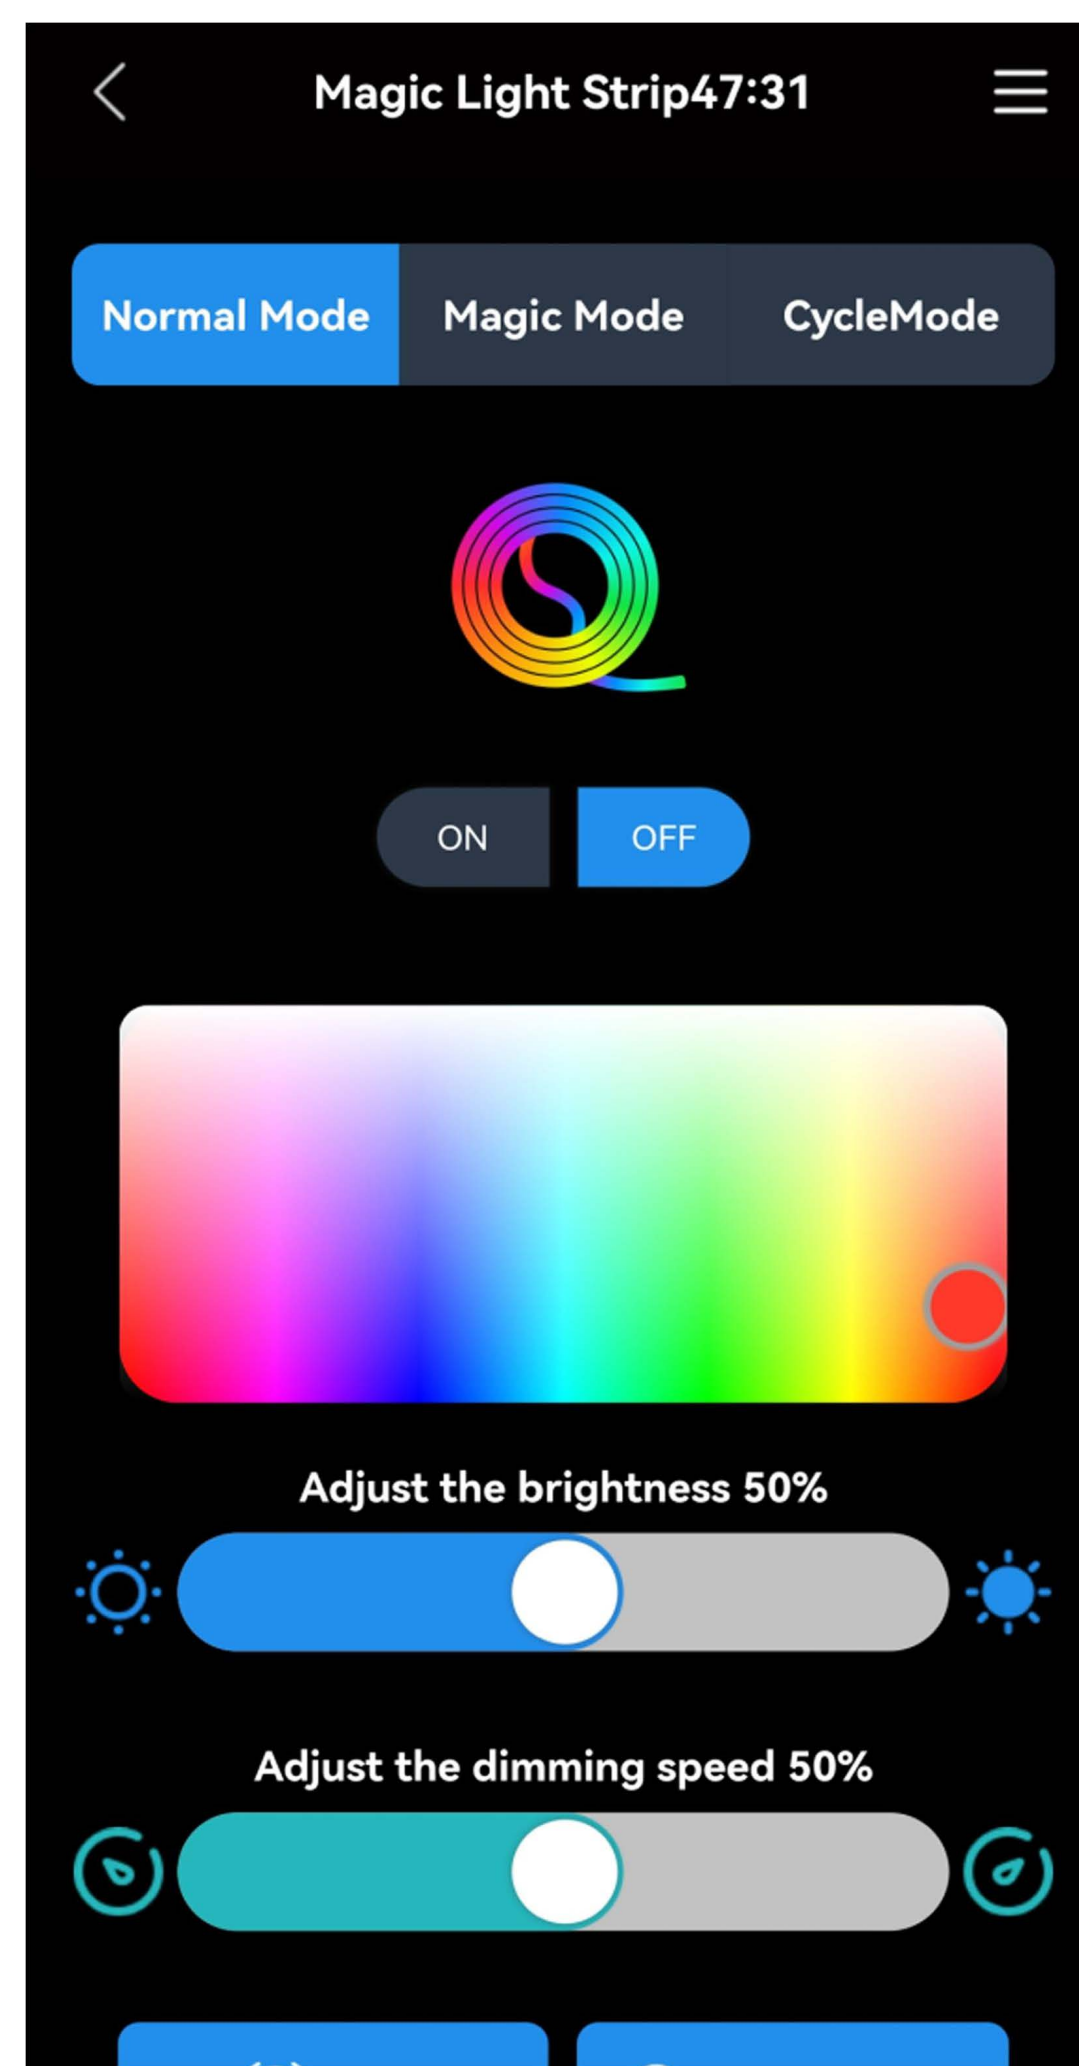

Now you can freely adjust the lighting according to your preferences