
Installation sequence


1

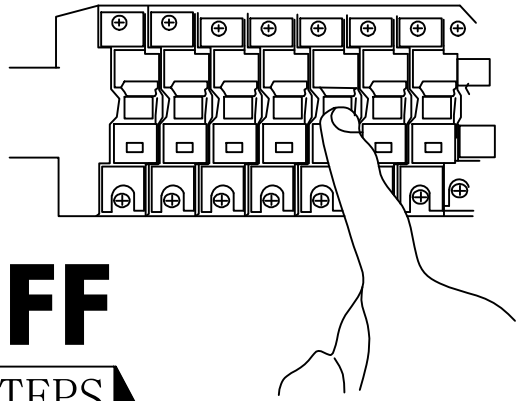

STEPS

Turn off the power


2

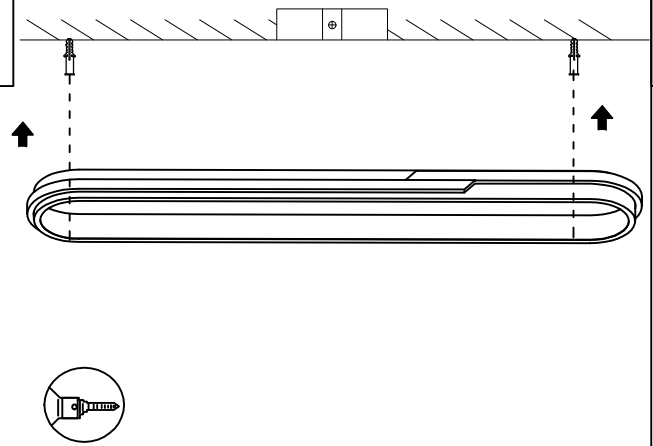

STEPS

Fix the plastic expansion screws into the wall according to the hole spacing of the chassis, flush with the wall surface.

3

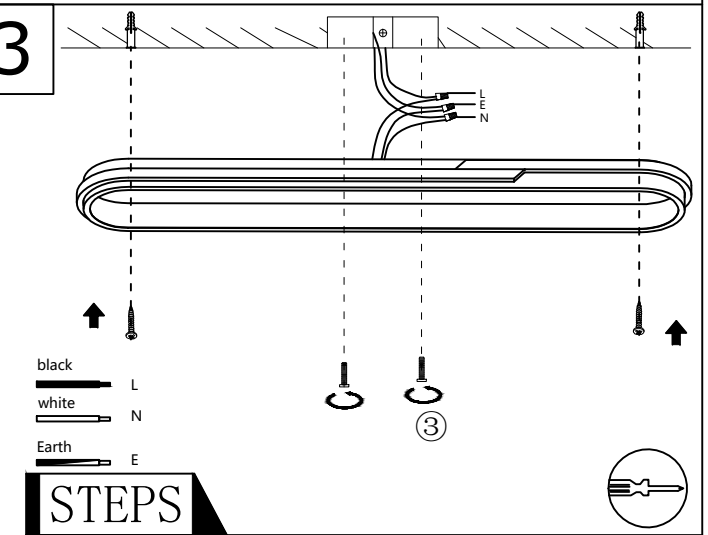


STEPS

1.Connect the wires of the lamp holder to the junction box with wire nuts. Match black wire to black wire, white wire to white wire, and ground wire to ground wire (usually green or bare copper wire).

2.Secure the mounting plate to the junction box with screws, then fasten both sides of the mounting plate with self-tapping screws.

4

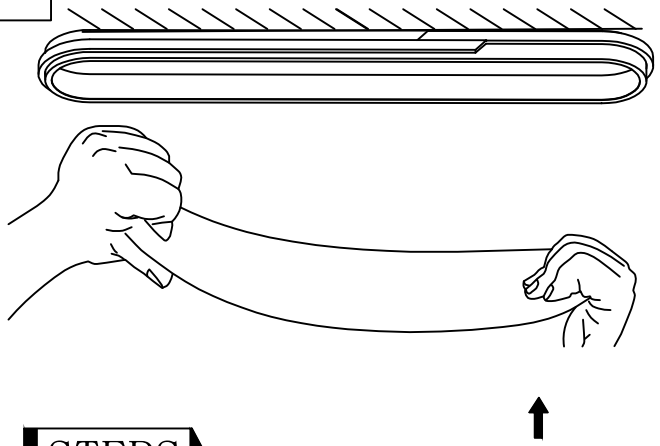

STEPS


1.Take the lampshade out of the packaging.
2.Gently bend the lampshade slightly inward with both hands, then fit it into the lamp body.

5



STEPS

Installation is Complete!

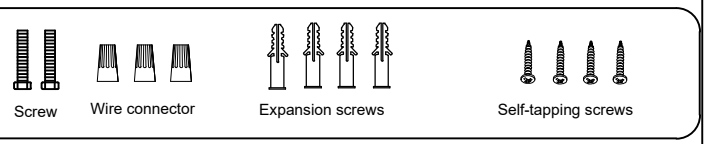

Before installation, please check whether the accessories are complete.If you have any problem, please contact our customer service in time.

Note:

1.Voltage: 120V-50-60Hz
2.Bulb Type: LED
3.Before installation, please cut off the power supply to prevent eletric shock.
4.Please be sure the installation step according to the company's instructions.