

Features


- Acrylic
- Two-piece design
- Complements the Escale Suite
- Freestanding bath with hole drilling for Symbol™ Roman Bath Filler
- BubbleMassage blower requires remote mounting
- 72" (1829 mm) x 36" (914 mm) x 24-1/8" (613 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- ASME A112.19.7/CSA B45.10
- UL 1795

6' FREESTANDING BUBBLEMASSAGE™ BATH K-11344-G

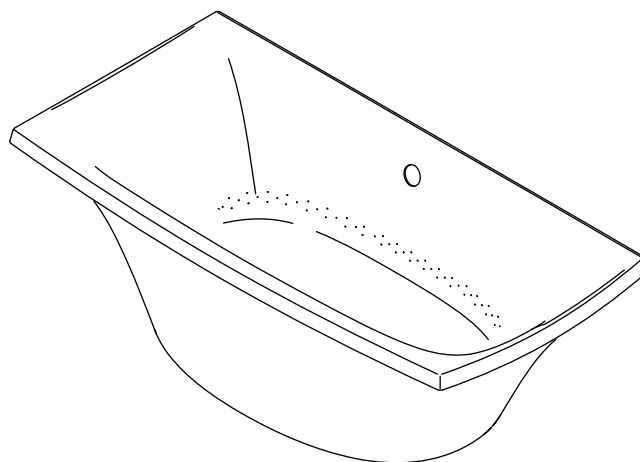

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-11344-G	6' Freestanding BubbleMassage bath with hole drilling for Symbol Roman Bath Filler	☐ 0	☐ Other_____

Required Accessories

K-7219	Bath drain	☐ CP	☐ Other_____
--------	------------	-----------------------------	-------------------------------------

Recommended Accessories

K-18486	Symbol Roman bath filler with handshower AND	☐ CP	☐ Other_____
K-18492	Riser tubes	☐ CP	☐ Other_____

Optional Accessories

K-1676	Pillow	☐ 0	
K-1601	Footstop	☐ 0	☐ Other_____

Product Specification

The two-piece acrylic bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 24-1/8" (613 mm) in height. Bath shall complement the Escale Suite. Bath shall be used with floor-mount faucet installation only. Bath shall be for use only with Symbol Roman Floor-Mount Bath Filler. Bath shall be Kohler Model K-11344-G-_____.

ESCALE®

Technical Information

Fixture*:	
Bathing well	
Basin area, bottom	46-3/4" (1187 mm) x 21-5/8" (549 mm)
Basin area, top	69-15/16" (1776 mm) x 34-3/8" (873 mm)
Weight	130 lbs (59 kg)
To overflow	
Water depth	16-1/2" (421 mm)
Capacity	71 gal (268.8 L)
* Approximate measurements for comparison only.	

Blower motor:	Heater	V	Hz	A
	300 W	120	60	5

Recommended spouts and spout locations*:

Area A – floor-mount installation K-18486 **AND** K-18492

*Refer to shaded areas in product diagram for recommended installation area locations.

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Blower motor: 120 V, 15 A, 60 Hz

Blower motor is supplied with a 24" (610 mm) grounding-type plug-in cord.


Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 41.5 lbs/square foot (202.8 kg/square meter) loading.

BubbleMassage blower requires remote mounting.

No change in measurements if connected with drain illustrated. (K-7219)

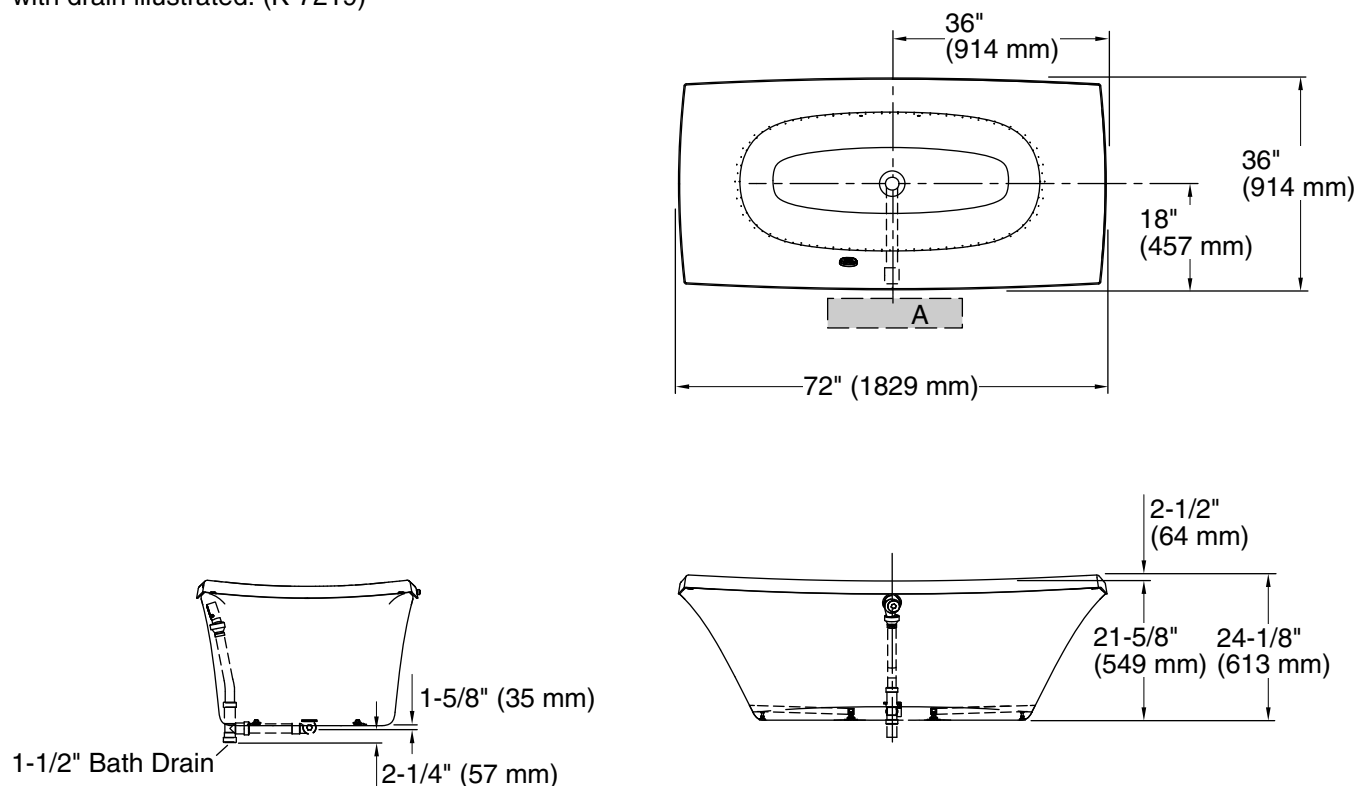

Product Diagram