



AVAILABLE FINISHES:



PRODUCT DESCRIPTION

What's in right now? Just some of the most powerful LEDs in the industry, along with mouth-blown etched opal glass and expertly crafted hardware. With its wide variety of sizes and luminaire options, slips into transitional, contemporary and urban industrial decor plans with ease.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Mouth-blown opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum hardware, mouth-blown opal glass diffuser

REPLACEMENT PARTS

Glass

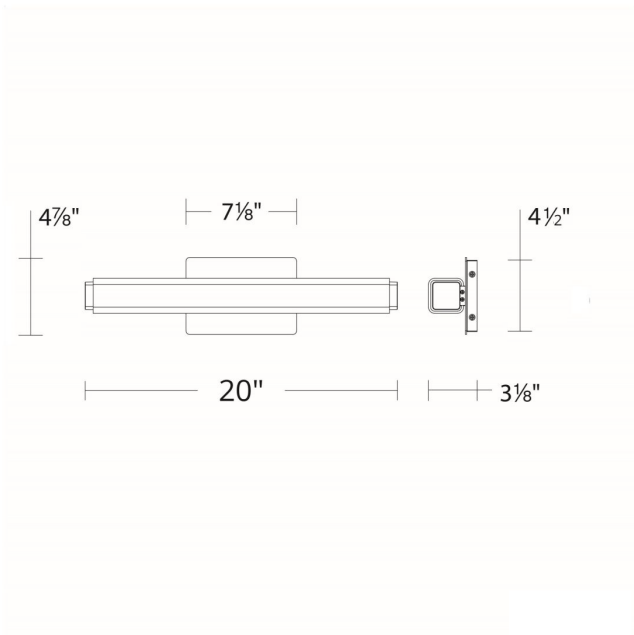

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
20"	2700K	BN	33.9W	2849	2139
	2700K	BR	33.9W	2849	2139
	2700K	BZ	33.9W	2849	2139
	2700K	CH	33.9W	2849	2139
	3500K	BN	33.9W	2849	2139
	3500K	BR	33.9W	2849	2139
	3500K	BZ	33.9W	2849	2139
	3500K	CH	33.9W	2849	2139
	3000K	BN	33.9W	2849	2139
	3000K	BR	33.9W	2849	2139
	3000K	BZ	33.9W	2849	2139
	3000K	CH	33.9W	2849	2139

•For 277V special order, add an "F" before the finish

AVAILABLE FINISHES:



PRODUCT DESCRIPTION

What's in right now? Just some of the most powerful LEDs in the industry, along with mouth-blown etched opal glass and expertly crafted hardware. With its wide variety of sizes and luminaire options, slips into transitional, contemporary and urban industrial decor plans with ease.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Mouth-blown opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Aluminum hardware, mouth-blown opal glass diffuser

REPLACEMENT PARTS

Glass

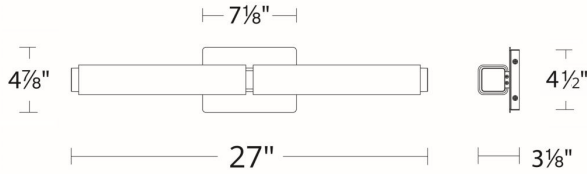

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens	
27"	2700K	BN	Brushed Nickel	40.6W	3895	2993
	2700K	BR	Brushed Brass	40.6W	3895	2993
	2700K	BZ	Bronze	40.6W	3895	2993
	2700K	CH	Chrome	40.6W	3895	2993
	3500K	BN	Brushed Nickel	40.6W	3895	2993
	3500K	BR	Brushed Brass	40.6W	3895	2993
	3500K	BZ	Bronze	40.6W	3895	2993
	3500K	CH	Chrome	40.6W	3895	2993
	3000K	BN	Brushed Nickel	40.6W	3895	2993
	3000K	BR	Brushed Brass	40.6W	3895	2993
	3000K	BZ	Bronze	40.6W	3895	2993
	3000K	CH	Chrome	40.6W	3895	2993

•For 277V special order, add an "F" before the finish



AVAILABLE FINISHES:



PRODUCT DESCRIPTION

What's in right now? Just some of the most powerful LEDs in the industry, along with mouth-blown etched opal glass and expertly crafted hardware. With its wide variety of sizes and luminaire options, slips into transitional, contemporary and urban industrial decor plans with ease.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Mouth-blown opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Aluminum hardware, mouth-blown opal glass diffuser

REPLACEMENT PARTS

- Glass

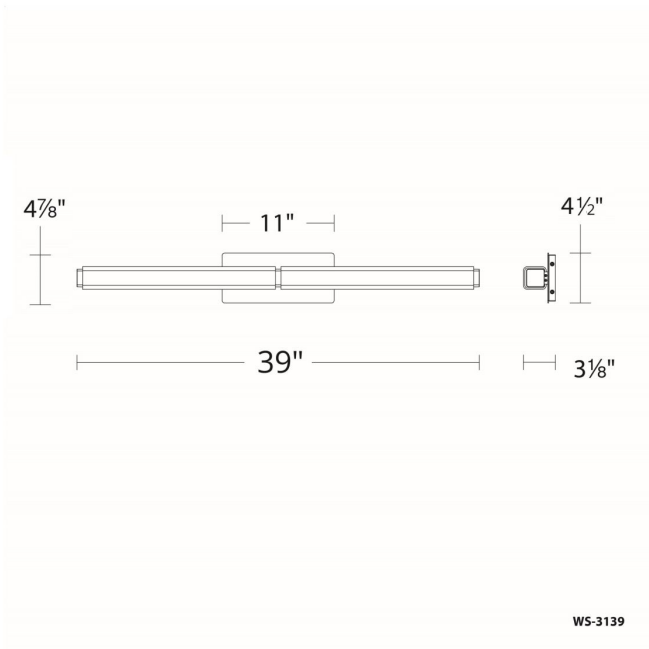

WS-3139

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens	
39"	2700K	BN	Brushed Nickel	66.2W	5574	4364
	2700K	BR	Brushed Brass	66.2W	5574	4364
	2700K	BZ	Bronze	66.2W	5574	4364
	2700K	CH	Chrome	66.2W	5574	4364
	3500K	BN	Brushed Nickel	66.2W	5574	4364
	3500K	BR	Brushed Brass	66.2W	5574	4364
	3500K	BZ	Bronze	66.2W	5574	4364
	3500K	CH	Chrome	66.2W	5574	4364
	3000K	BN	Brushed Nickel	66.2W	5574	4364
	3000K	BR	Brushed Brass	66.2W	5574	4364
	3000K	BZ	Bronze	66.2W	5574	4364
	3000K	CH	Chrome	66.2W	5574	4364

•For 277V special order, add an "F" before the finish