



Aquifer® | K-22157

Reverse osmosis (RO) sediment pre-filter replacement

Features

- Reduces dirt, sand and rust in drinking water
- Filter head automatically turns off water supply when cartridge is removed
- Replacing RO sediment prefilter every six months keeps filtration system performing effectively



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:15 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B483.1
NSF/ANSI 42

Material


- High-impact plastic construction
-

Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty



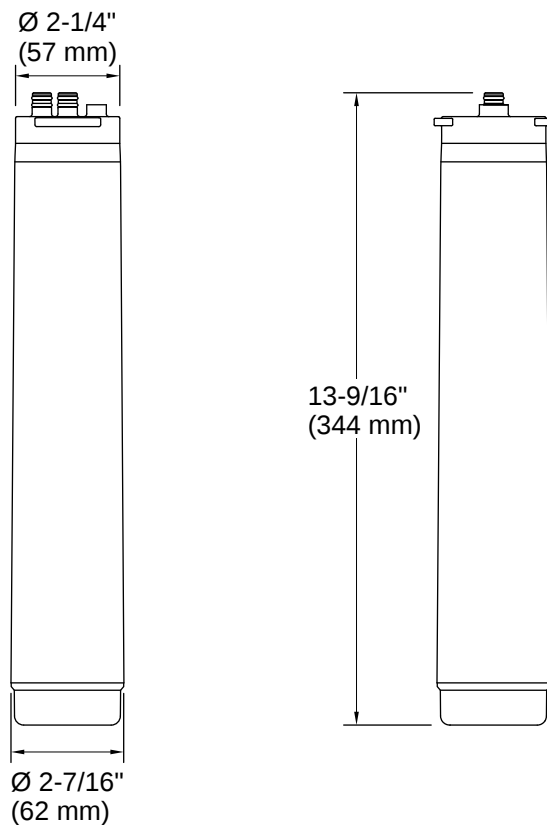

Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement

Installation Notes

Install this product according to the installation instructions.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters: Water

Pressure: 40-100 psi (276-689 kPa) Water Temperature: 40-100°F (4.4-37.8°C)

