
INSTALLATION

10 Place the glass onto the lamp head, twist the lamp head ring, and install the E12 bulbs (bulbs not included)

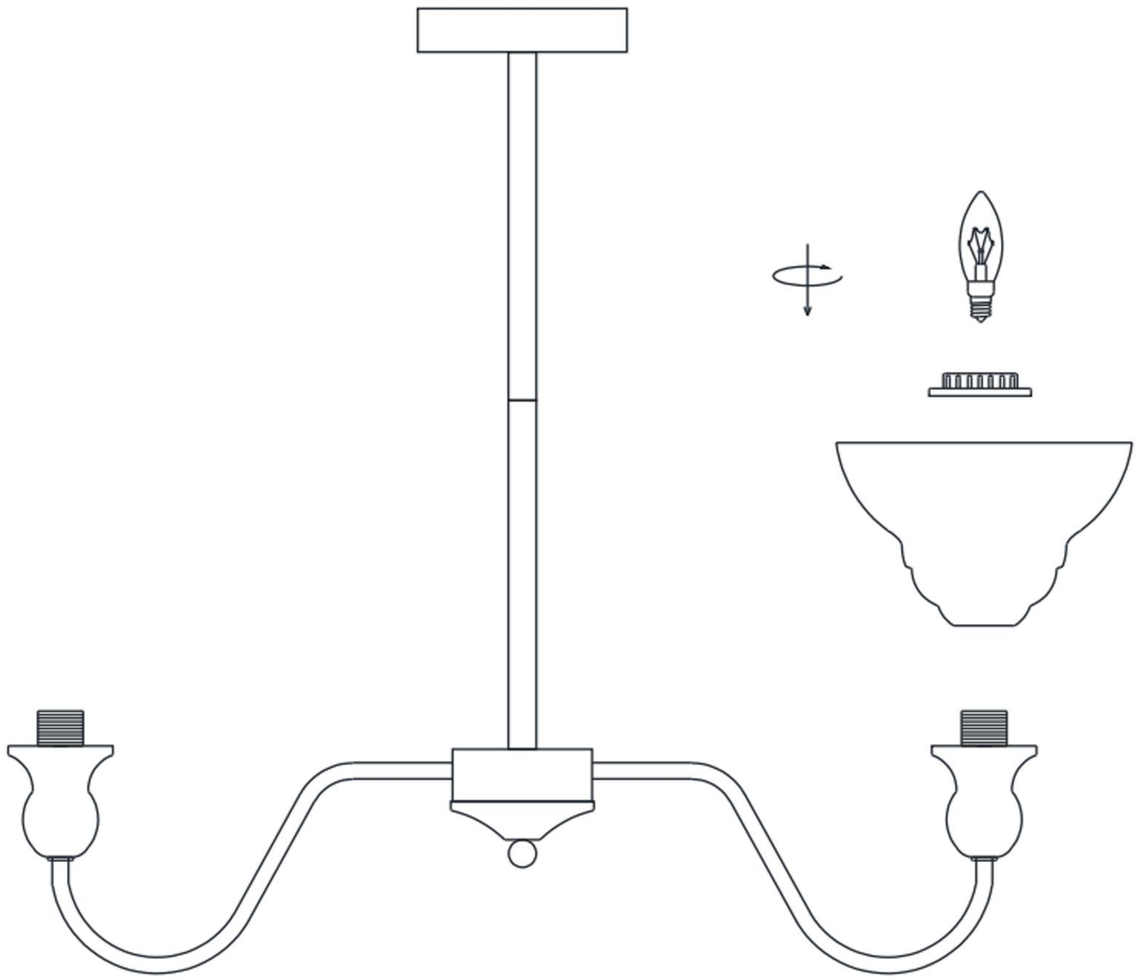

INSTALLATION GUIDE FOR 70082-6

⚠ WARNINGS AND CAUTIONS

Released Date:2026-01

READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Tum off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

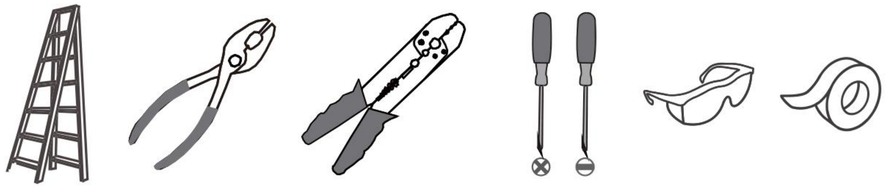

CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance contact our After Customer Care at


betteraftersaleservice01@outlook.com,

we will reply you in 24 hours.


PACKAGE CONTENTS




D Threaded Tube
x 4




C Ceiling Canopy
x 1

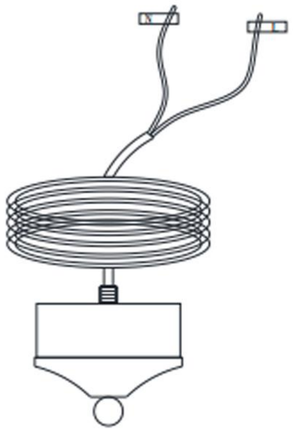

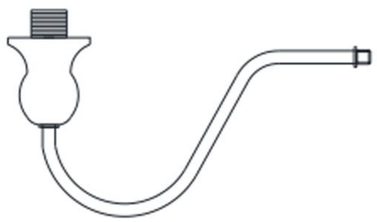


E Socket Rod
x 6




B Glass Shade
x 6

A Fixture Body with Wire
x 1

PACKAGE CONTENTS (PARTS BAG 1)




AA Wire Connector
x 4



BB Screw
x 4



CC Wall Anchor
x 4




EE Mounting Bracket
x 1




DD Mechanical Screw
x 2

INSTALLATION


9 Fix the canopy onto the Mounting Bracket with Cap Nut

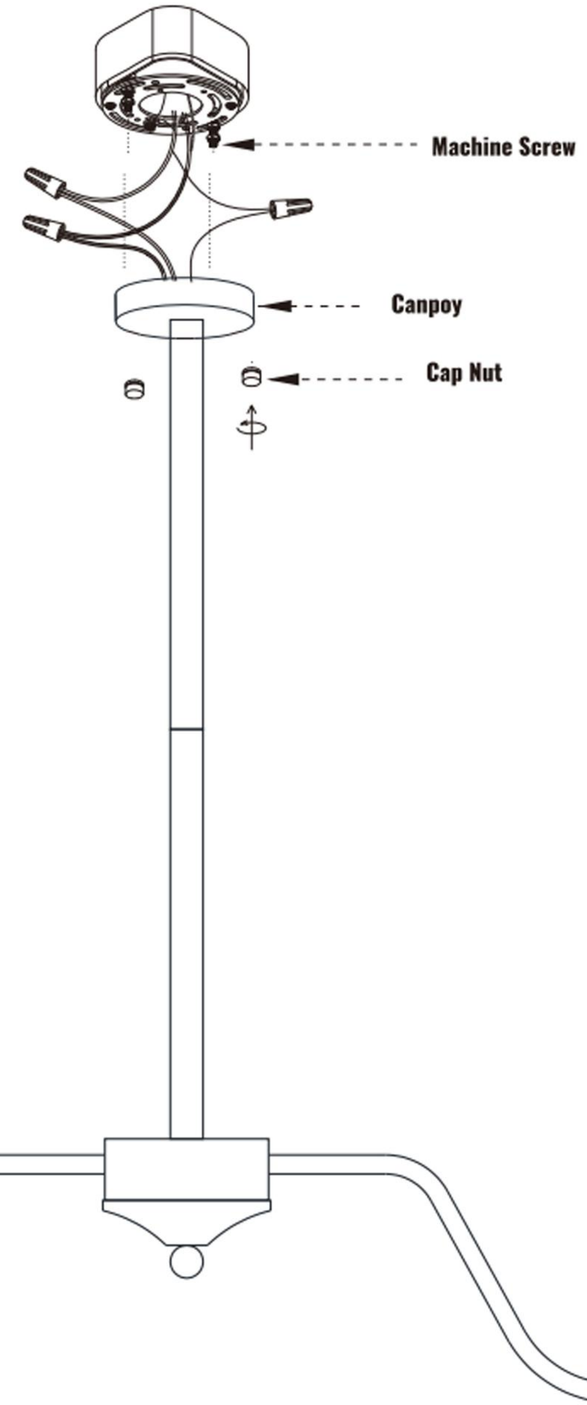


7 Install the Mounting Bracket

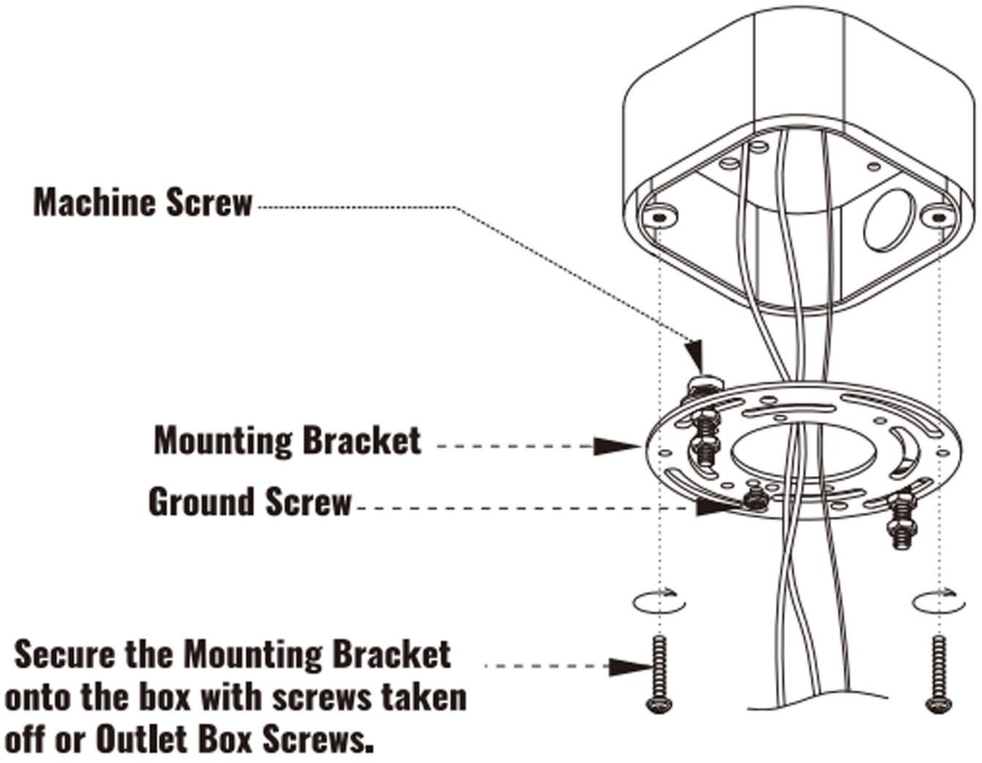

8 Wiring

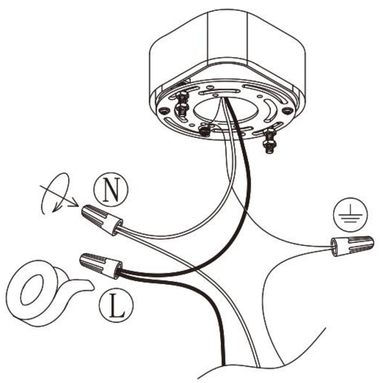


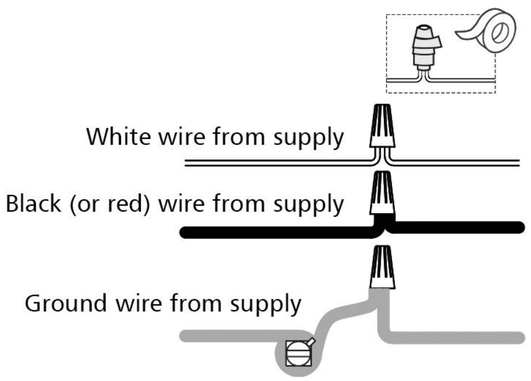


Step 1: Connect the wires from the fixture to the house supply wires nuts, ground wire (green, green/yellow, or bare) to ground wire, neutral wire(white)to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electriacl tape.

Step 2: Spread apart the wires so that the hot wrires are on one side of the outler box and the neutral wires are on the other side.


1 Unscrew the nut from the fixture body and remove the cover Set it aside for later installation

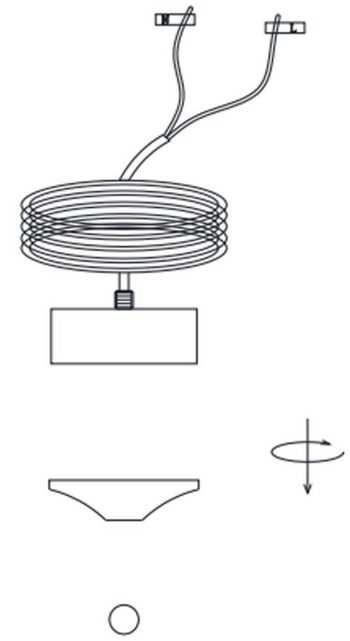

2 Unscrew the nuts and washers from the 6 socket rods

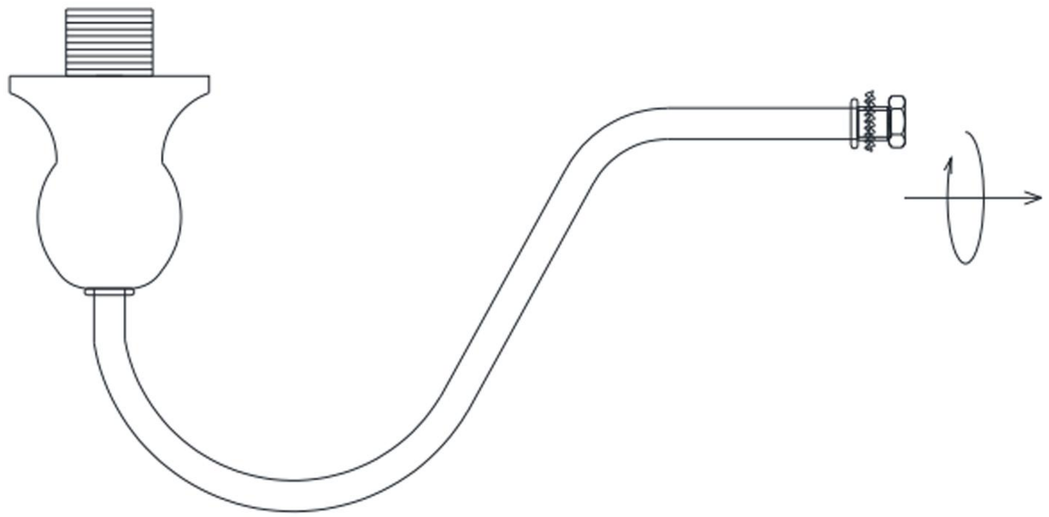


3 Use the washers and nuts to secure the 6 socket rods to the lamp fixture with wire

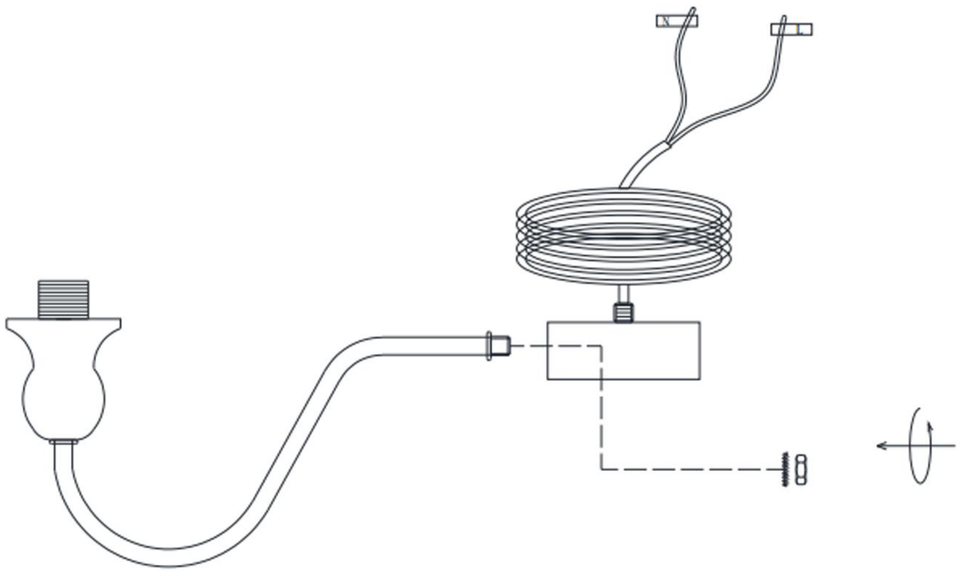


4 1. Connect the wires from the socket rod to the wires from the fixture body, matching the colors (white to white, black to black) Secure the connections with wire nuts and tuck them into the fixture body

2. Place the cover onto the fixture body and secure it by screwing on the nut

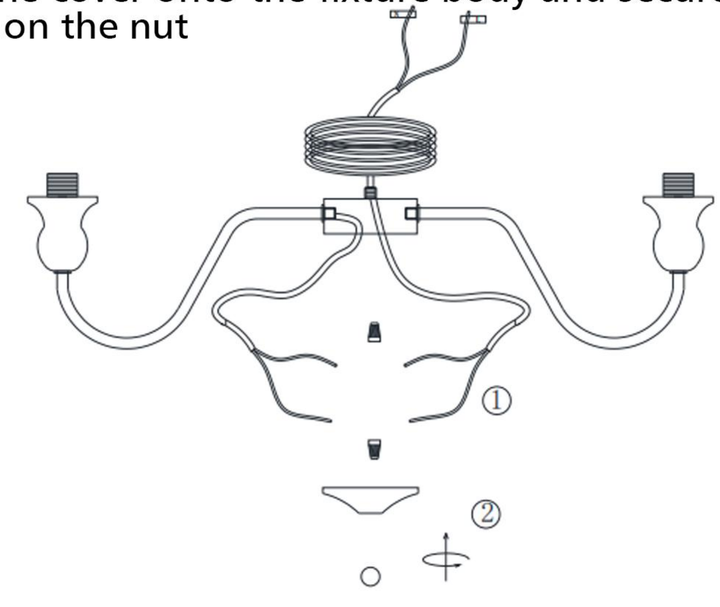

5 Choose the appropriate length of the Threaded Tube, thread the fixture body wires through the Threaded Tube, then pass them through the ceiling canopy. Finally, tighten both ends and the middle connection of the Threaded Tube

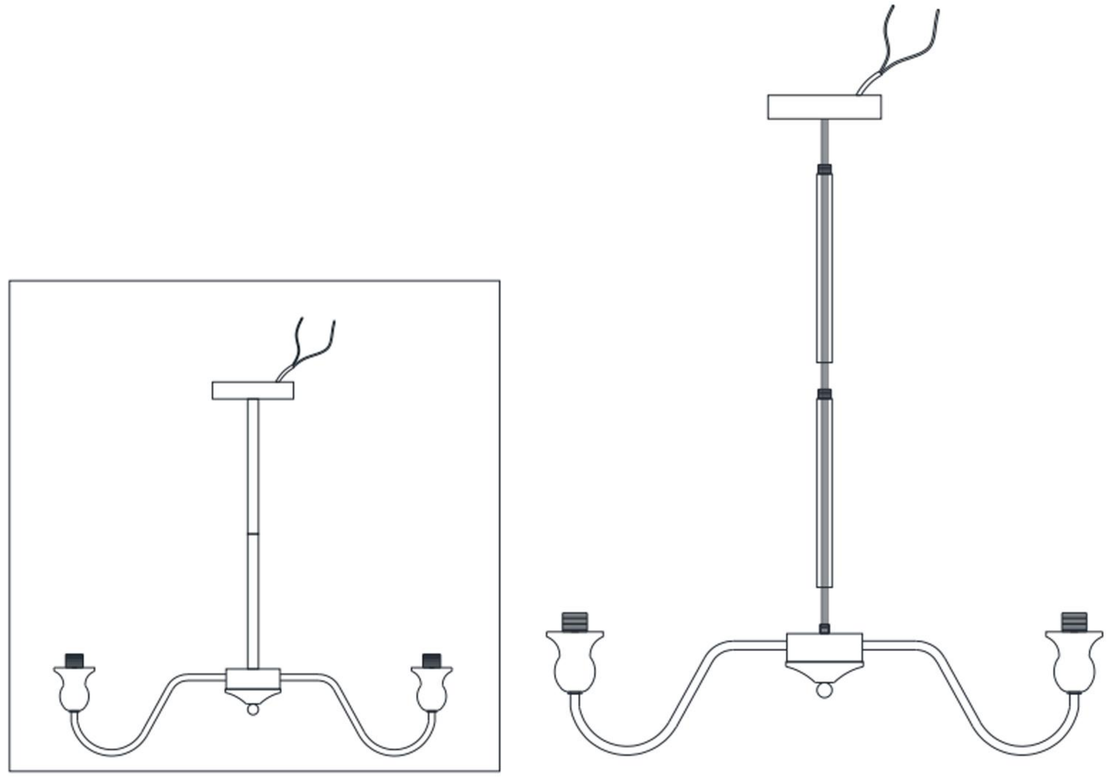

6 1. Unscrew the nuts ❶ on both sides of the ceiling canopy.
2. Take out the mounting bracket ❷.

