


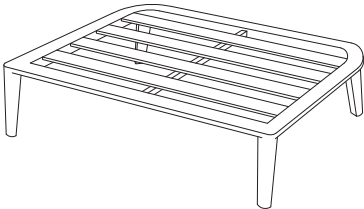









INSTRUCTION MANUAL

Assembly Instructions			
No.	COMPONENT	DESCRIPTION	QTY
A		LEFT ARMREST	1
B		RIGHT ARMREST	1
C		SEAT FRAME	1
D		BACK FRAME	1


Assembly Instructions			
No.	COMPONENT	DESCRIPTION	QTY
E		BACK CUSHION	1
F		SEAT CUSHION	1
G		LEFT ARMREST CUSHION	1
H		RIGHT ARMREST CUSHION	1
I		1/4"x18 mm BOLT	6
J		Ø6.5x1.0 mm WASHER	6
K		HEX BOLT DRIVER	1

Assembly Instructions

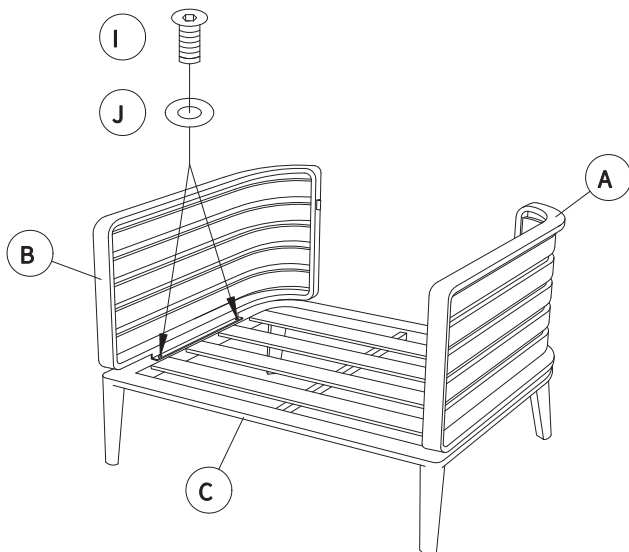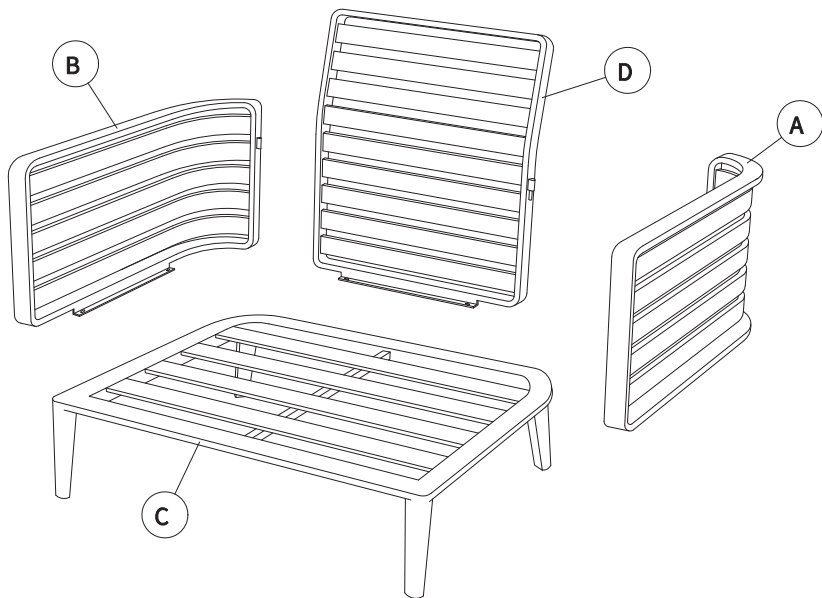


Step 1: Insert 1/4"x18mm bolt(I) and washer(J) through the holes in the left & right armrest(A&B) and the seat frame(C). Repeat for the rest holes in the frame.

Assembly Instructions

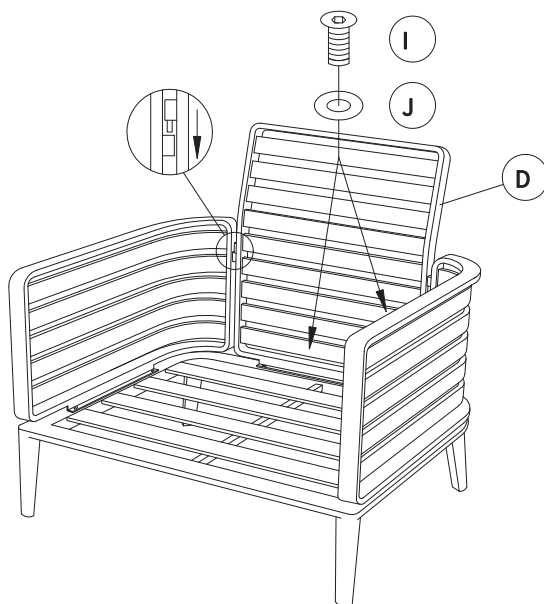

Step 2: Insert 1/4"x18mm bolt(I) and washer(J) through the holes in the back frame(D) and the seat frame(C). Repeat for the rest holes in the frame.

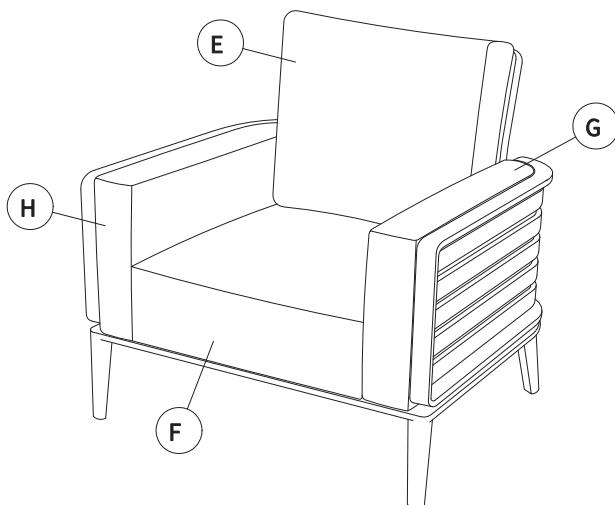

Step 3: Tighten all the bolts completely. Your chair should be ready for use.