



Installation Instruction

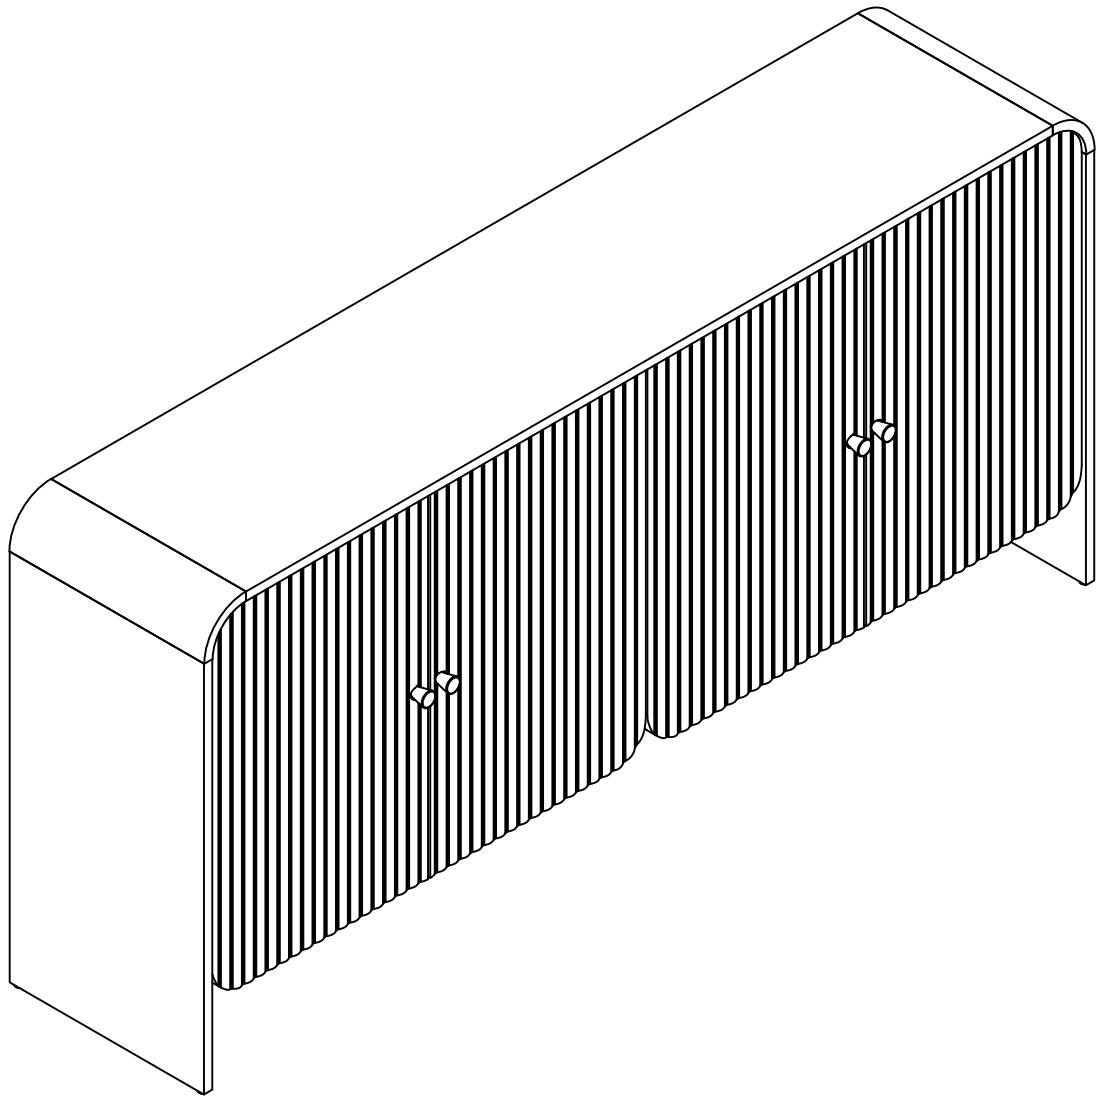

Assembling

What you need

- Use the packaging carton as a working surface to prevent product damage during assembly
- Phillips head screwdriver



Weight Limitation




100

lbs table top

35


lbs per

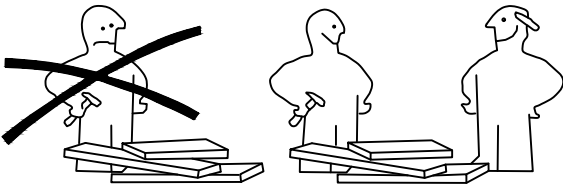

What' included

Code	Description	Qty
A	Cam Bolt M6X35MM	30
B	Cam Lock 15X10MM	30
C	Wooden Dowel M8X30MM	20
D	Screw M4X40MM	4
E	Screw M3.5X14MM	70
F	Shelf Holder	8
G	NMetal connector	2
H	Shelf Holder	4
I	Cam Bolt M4X15MM	4
J	The back button	20
K	Anchor	2
L	MATS	4
M	Metal shake handhandle	4
N	Self-adhesive hole sticker	30
O	Adjustable foot pads	1
P	The metal plate	1
Q	Screw M4.0X14MM	4
R	Shelf Holder	4
S	Iron absorption	2
T	Screw M3.0X16MM	4

The Hardwares

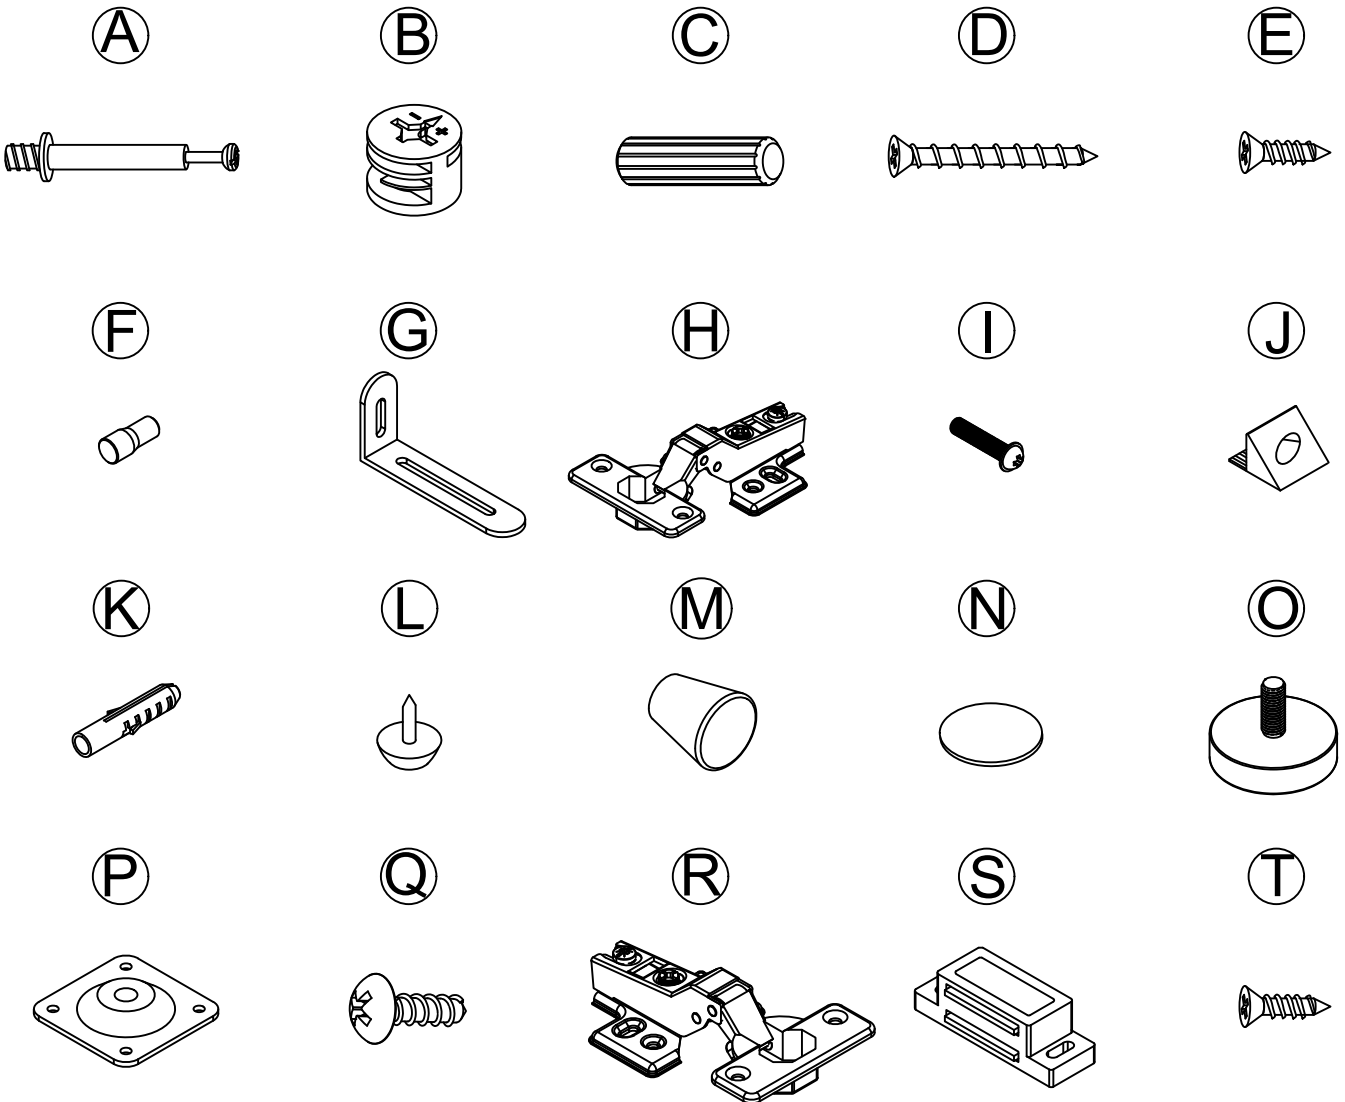


IMPORTANT:

1. Do not tighten bolts / screws completely until all bolts / screws are lined up and inserted into holes.
2. Do not over tighten screws and bolts to avoid stripping
3. You can use a screwdriver. Power tools can also be used. (Be careful with power tools)




Included Accessories

Code	Description	Qty
1	Cabinet Top	1
2	Arc connecting plate	2
3	Left Side Panel	1
4	Right Side Panel	1
5	On the rear panell	2
6	On the rear panell	2
7	Right door panel	1
8	Back reinforcement plate	2
9	Movable laminated plate	2
10	Solid wood feet	1
11	The left middle door leaf	1
12	The right middle door leaf	1
13	Left and right door panels	2
14	Bottom Panel	1
15	Left panel reinforcing plate	1
16	Right panel reinforcing plate	1








The Accessories

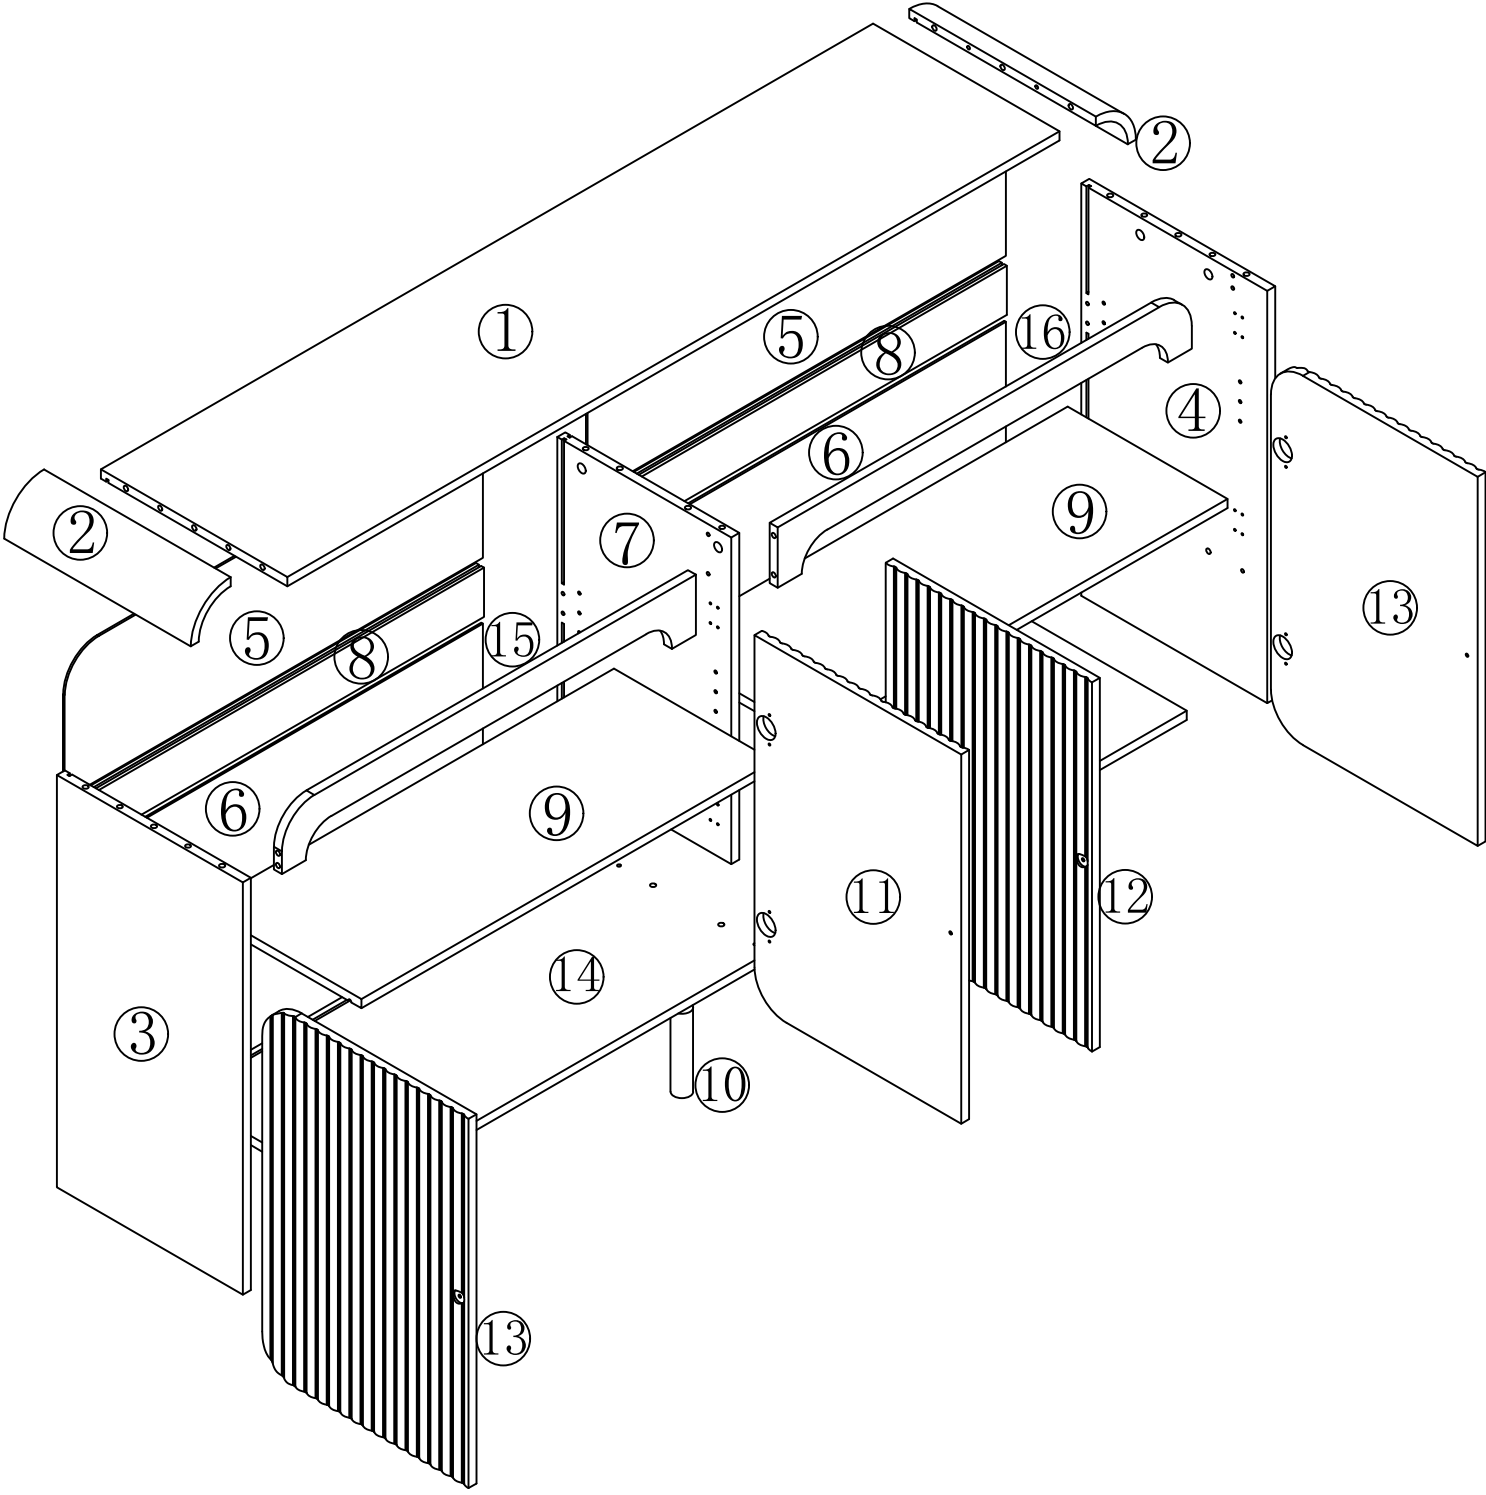




Step 1

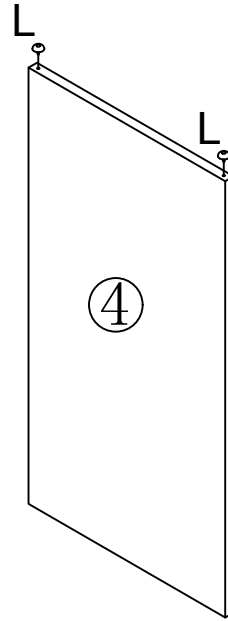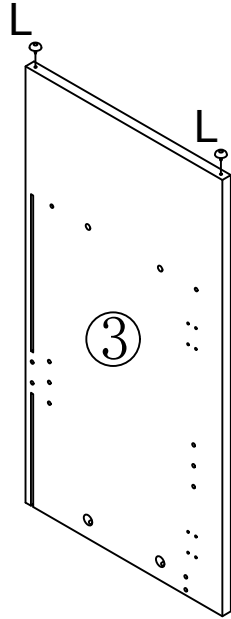



Step 2

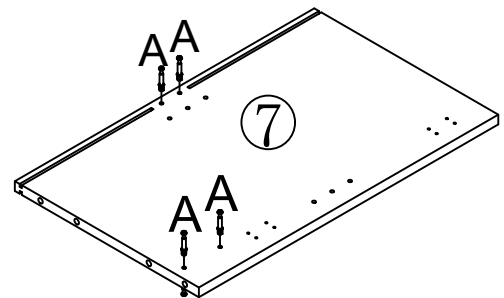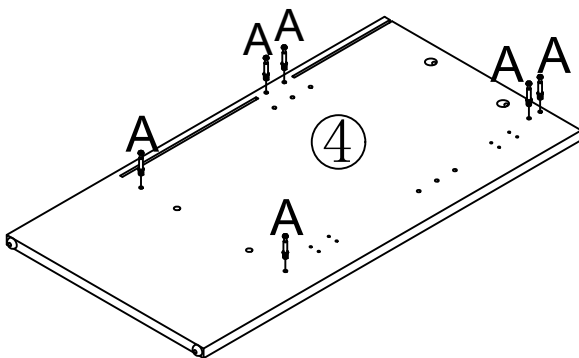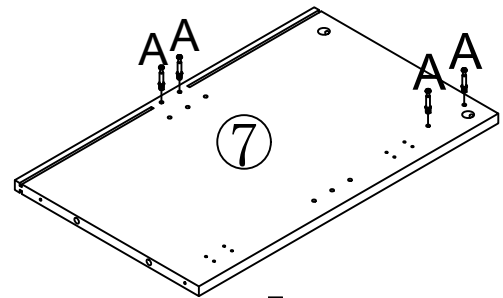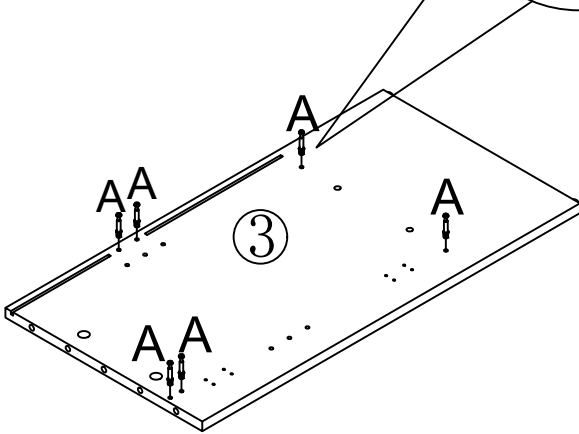


Step 3

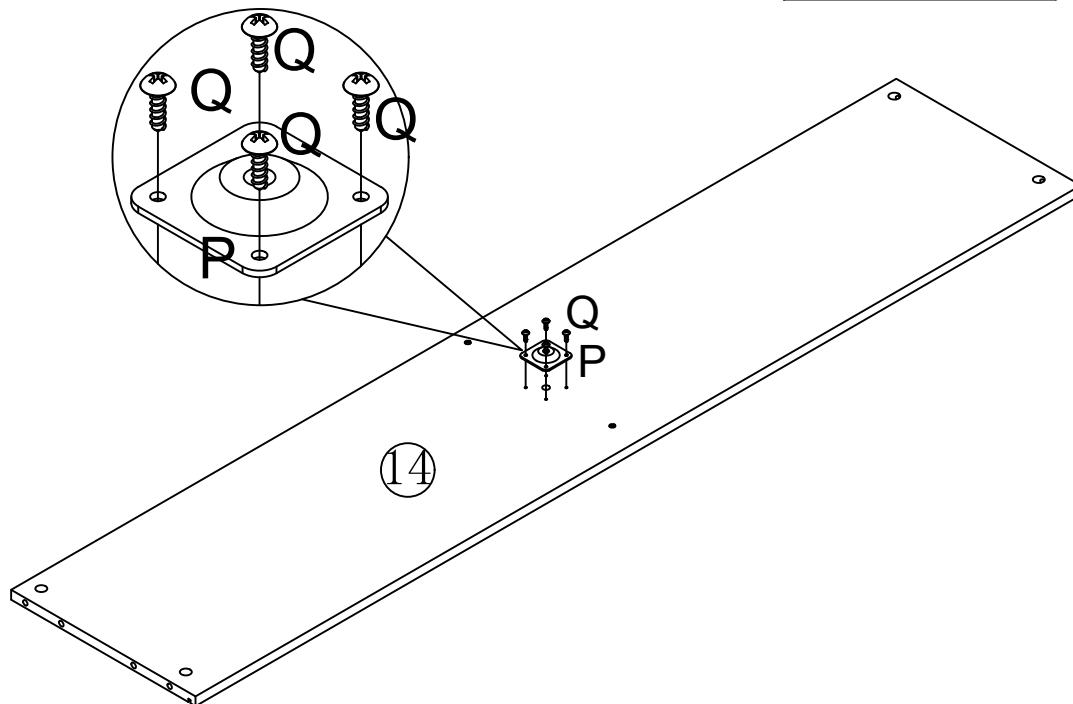


Step 4

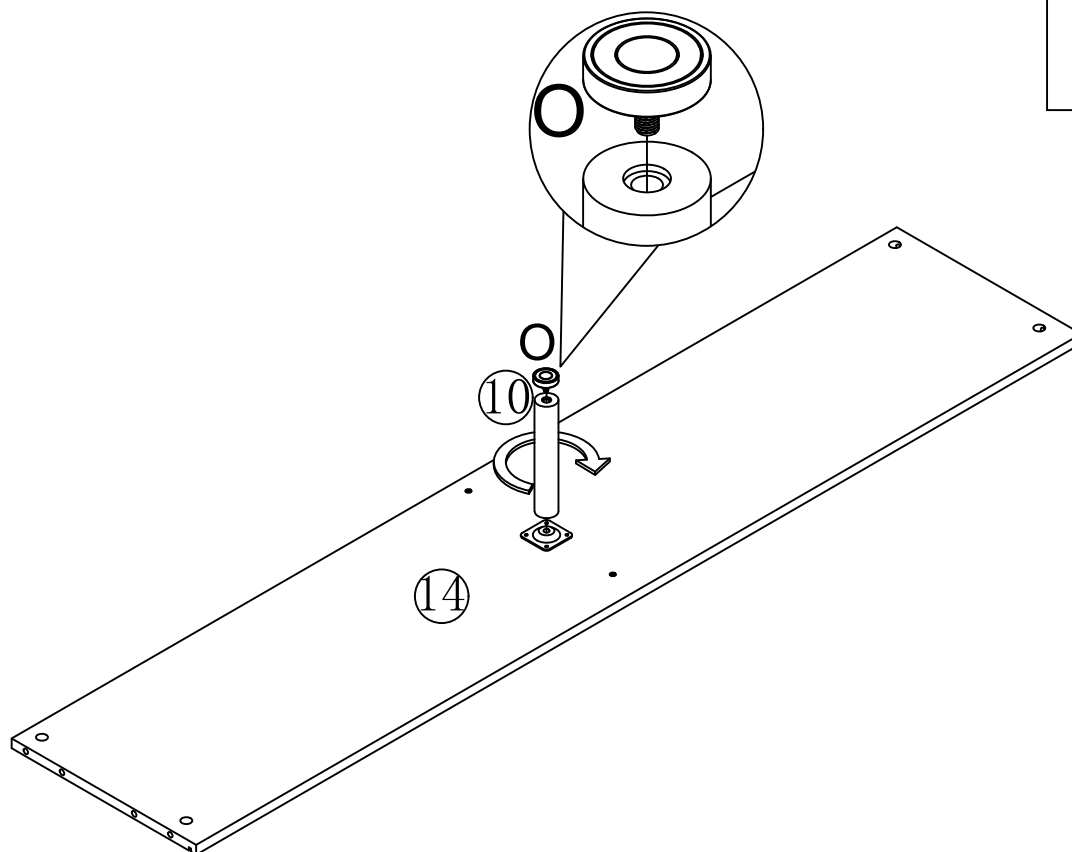

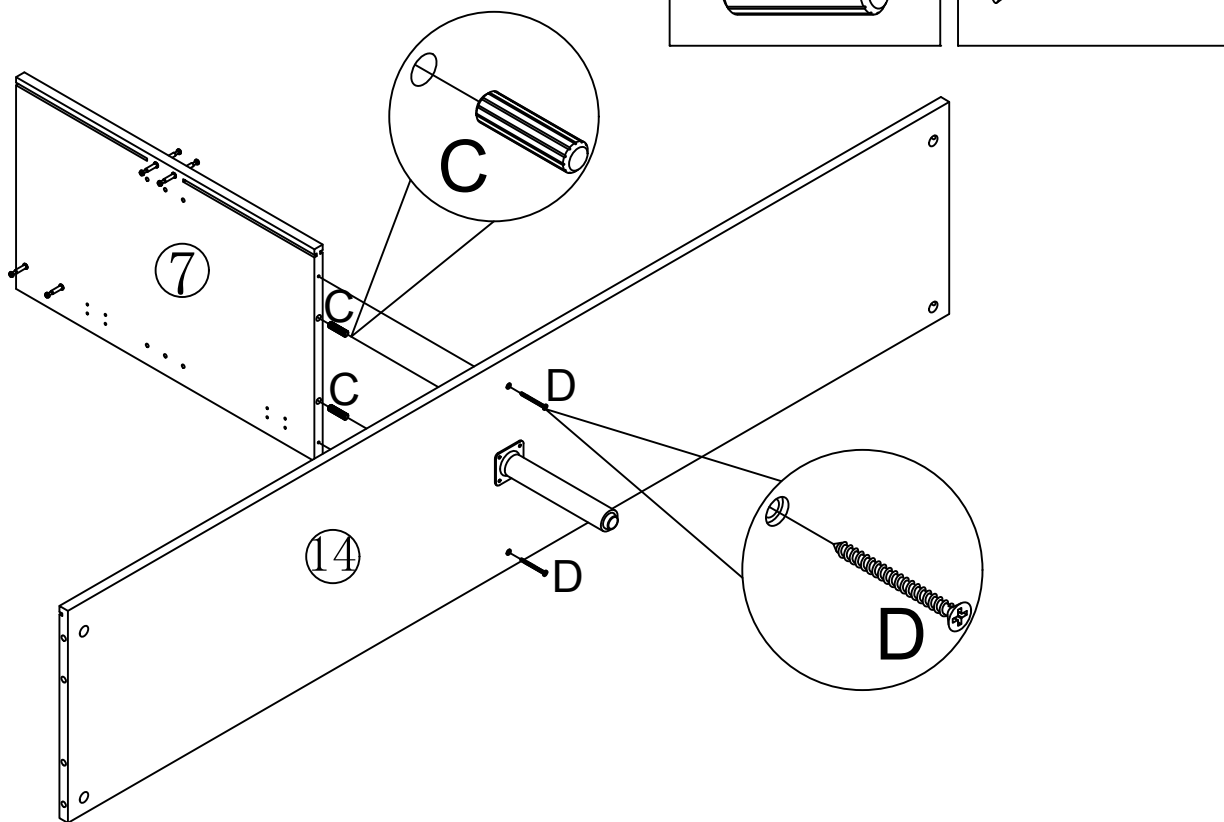


Step 5

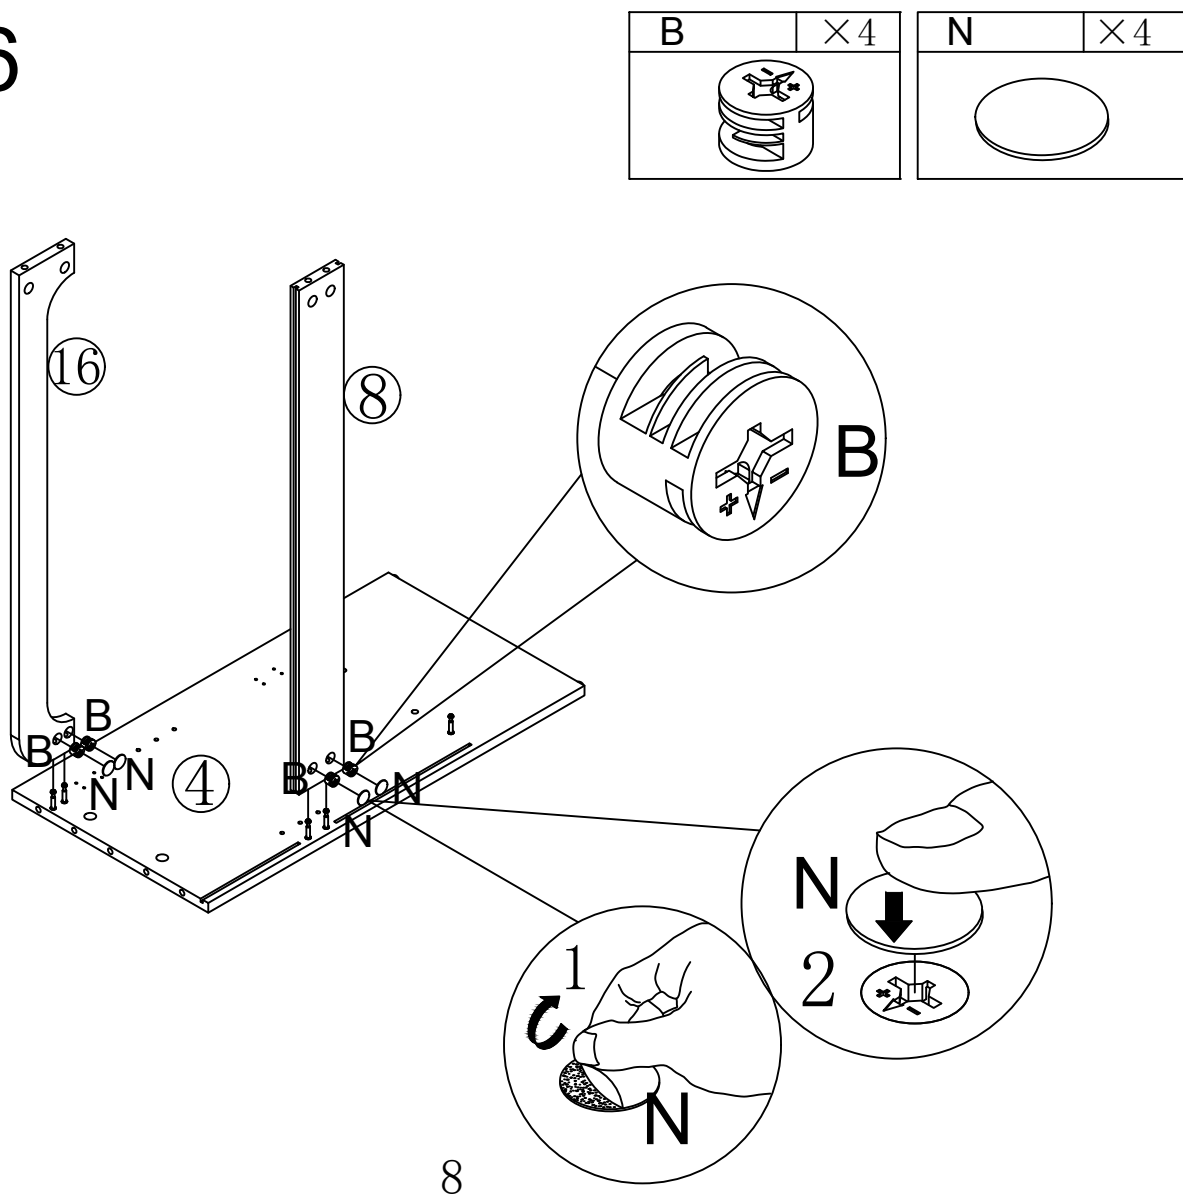


Step 6





Step 7



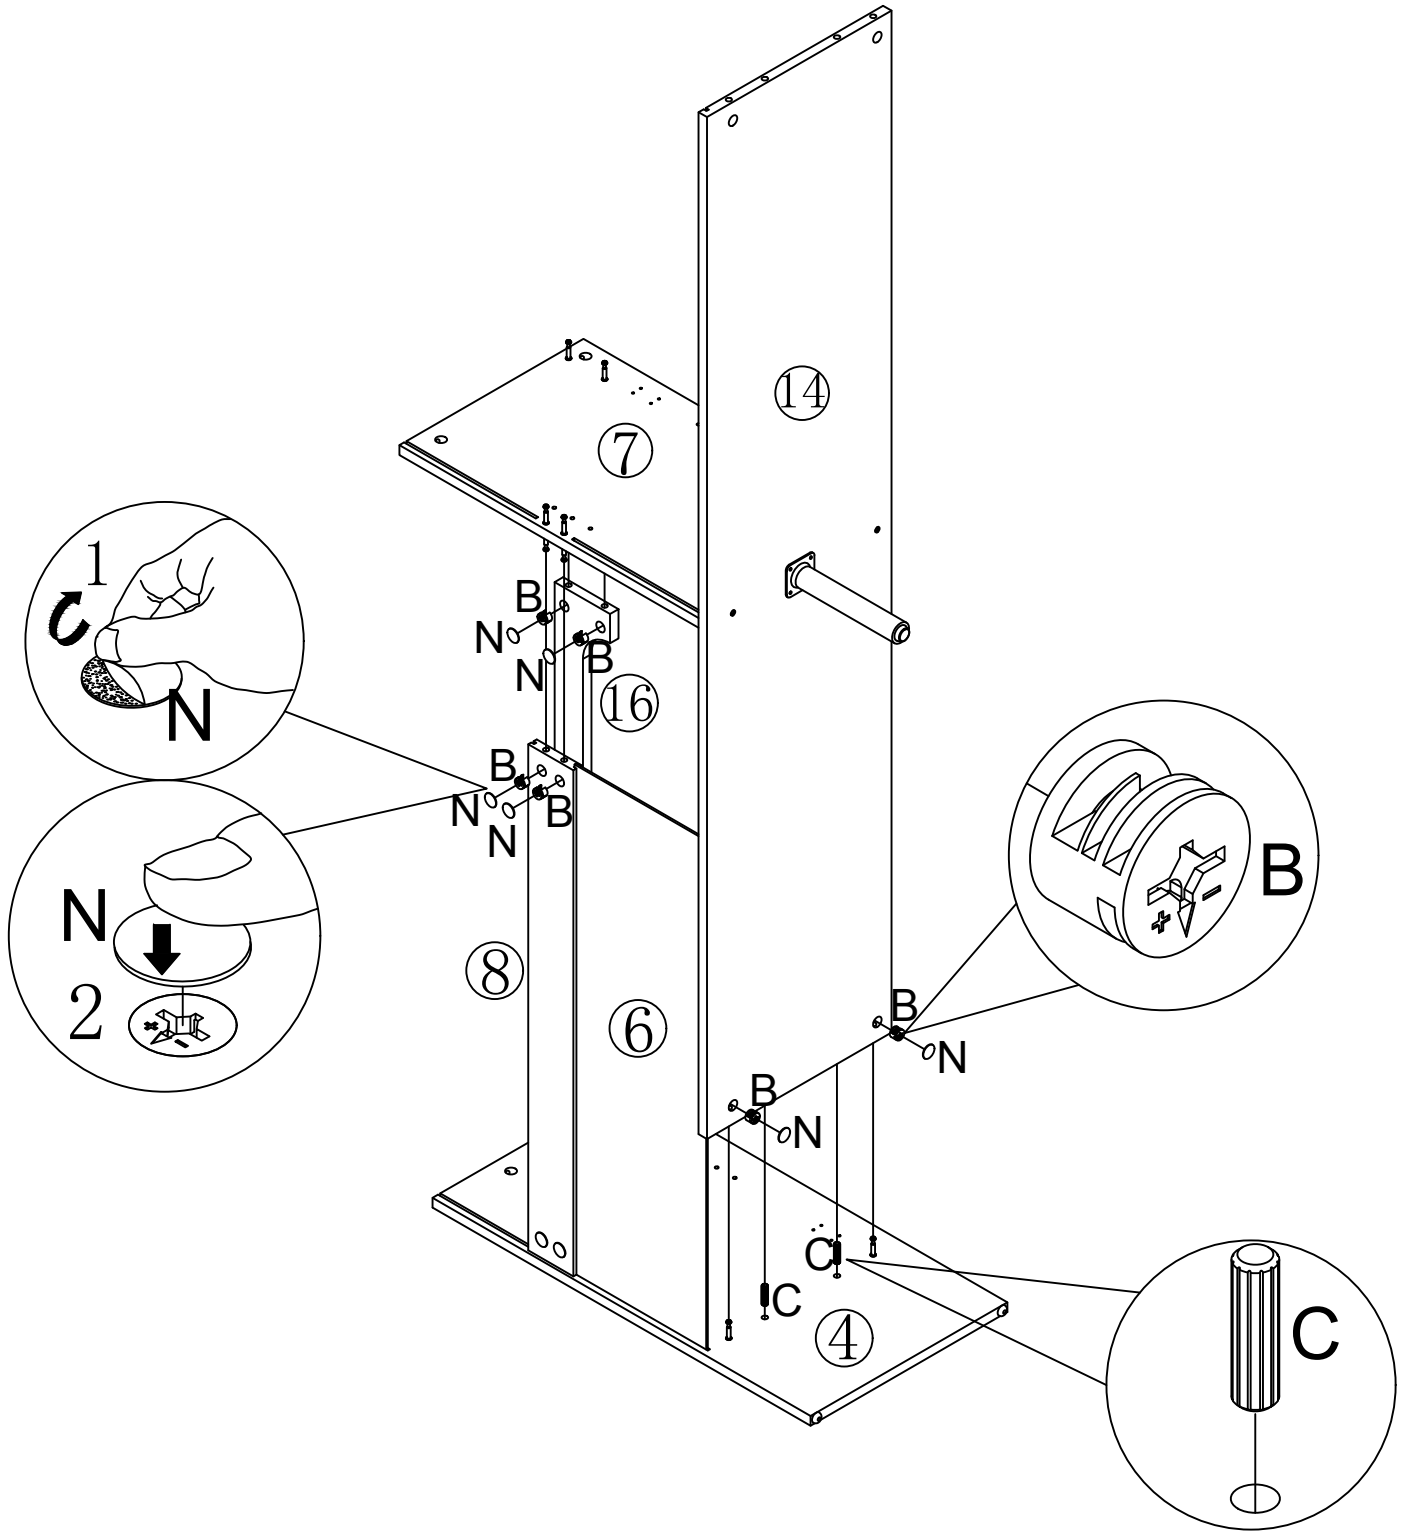
B	×6	C	×2	N	×6
					

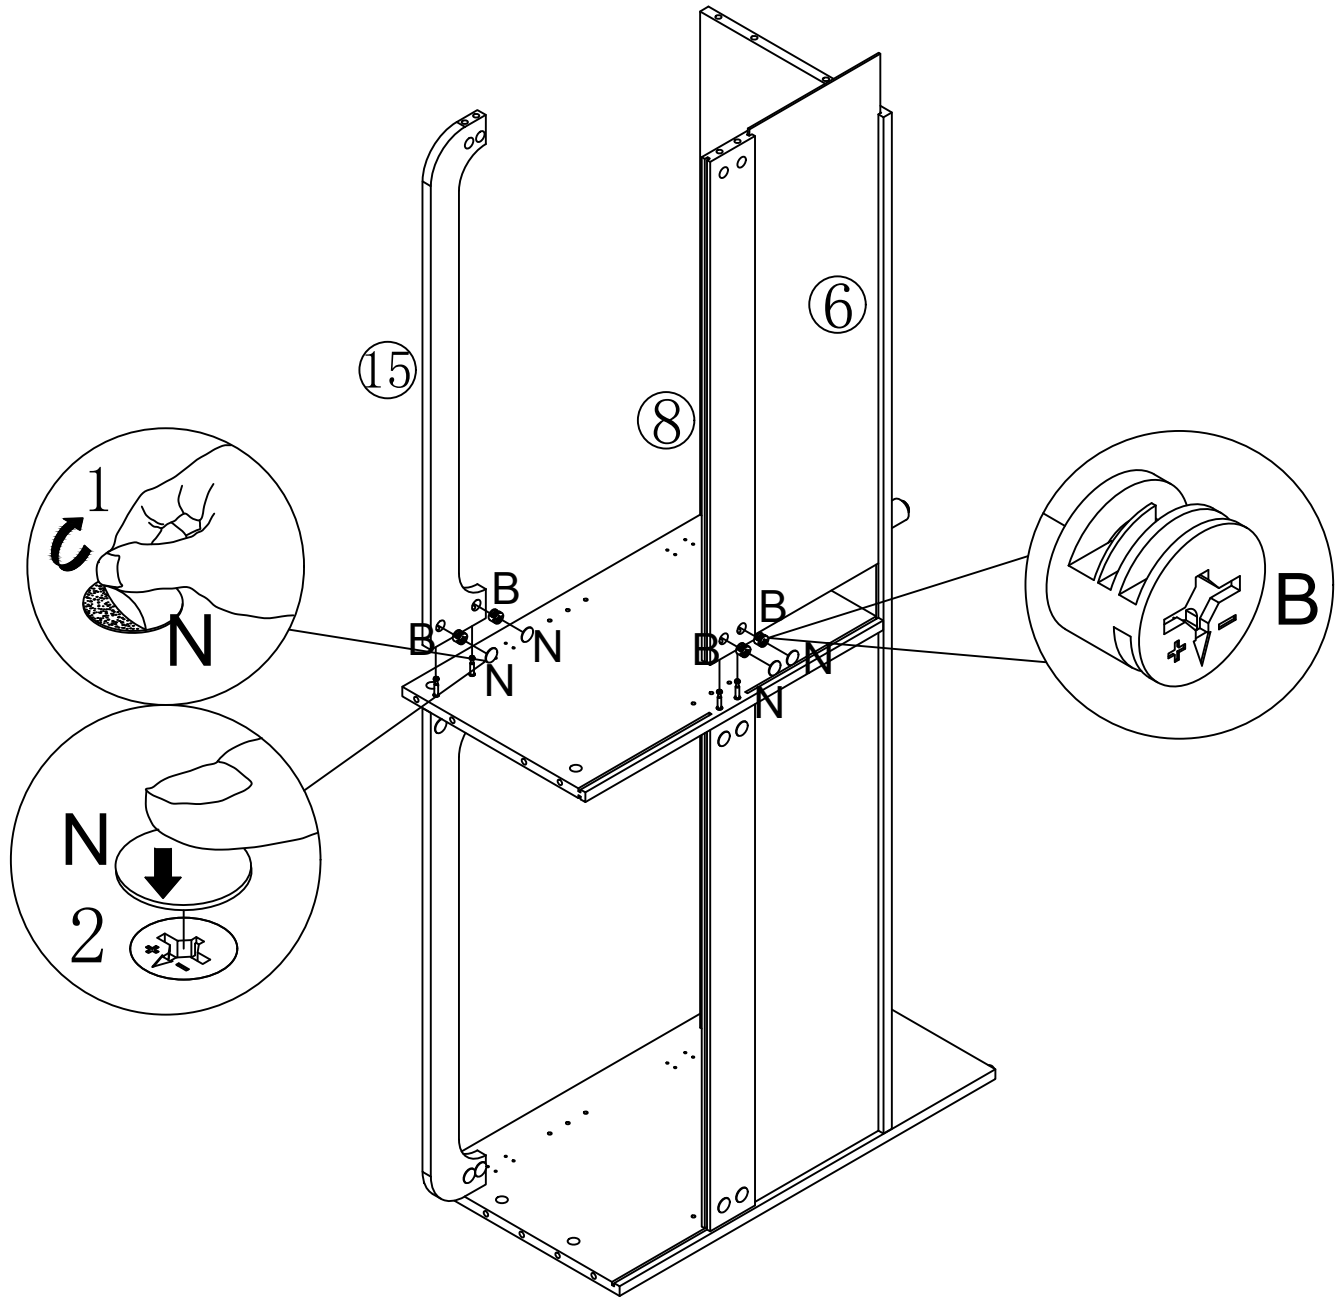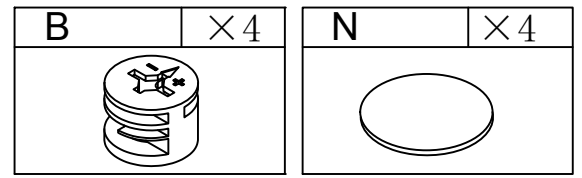


Step 8




Step 9

B	×6	C	×2	N	×6
					

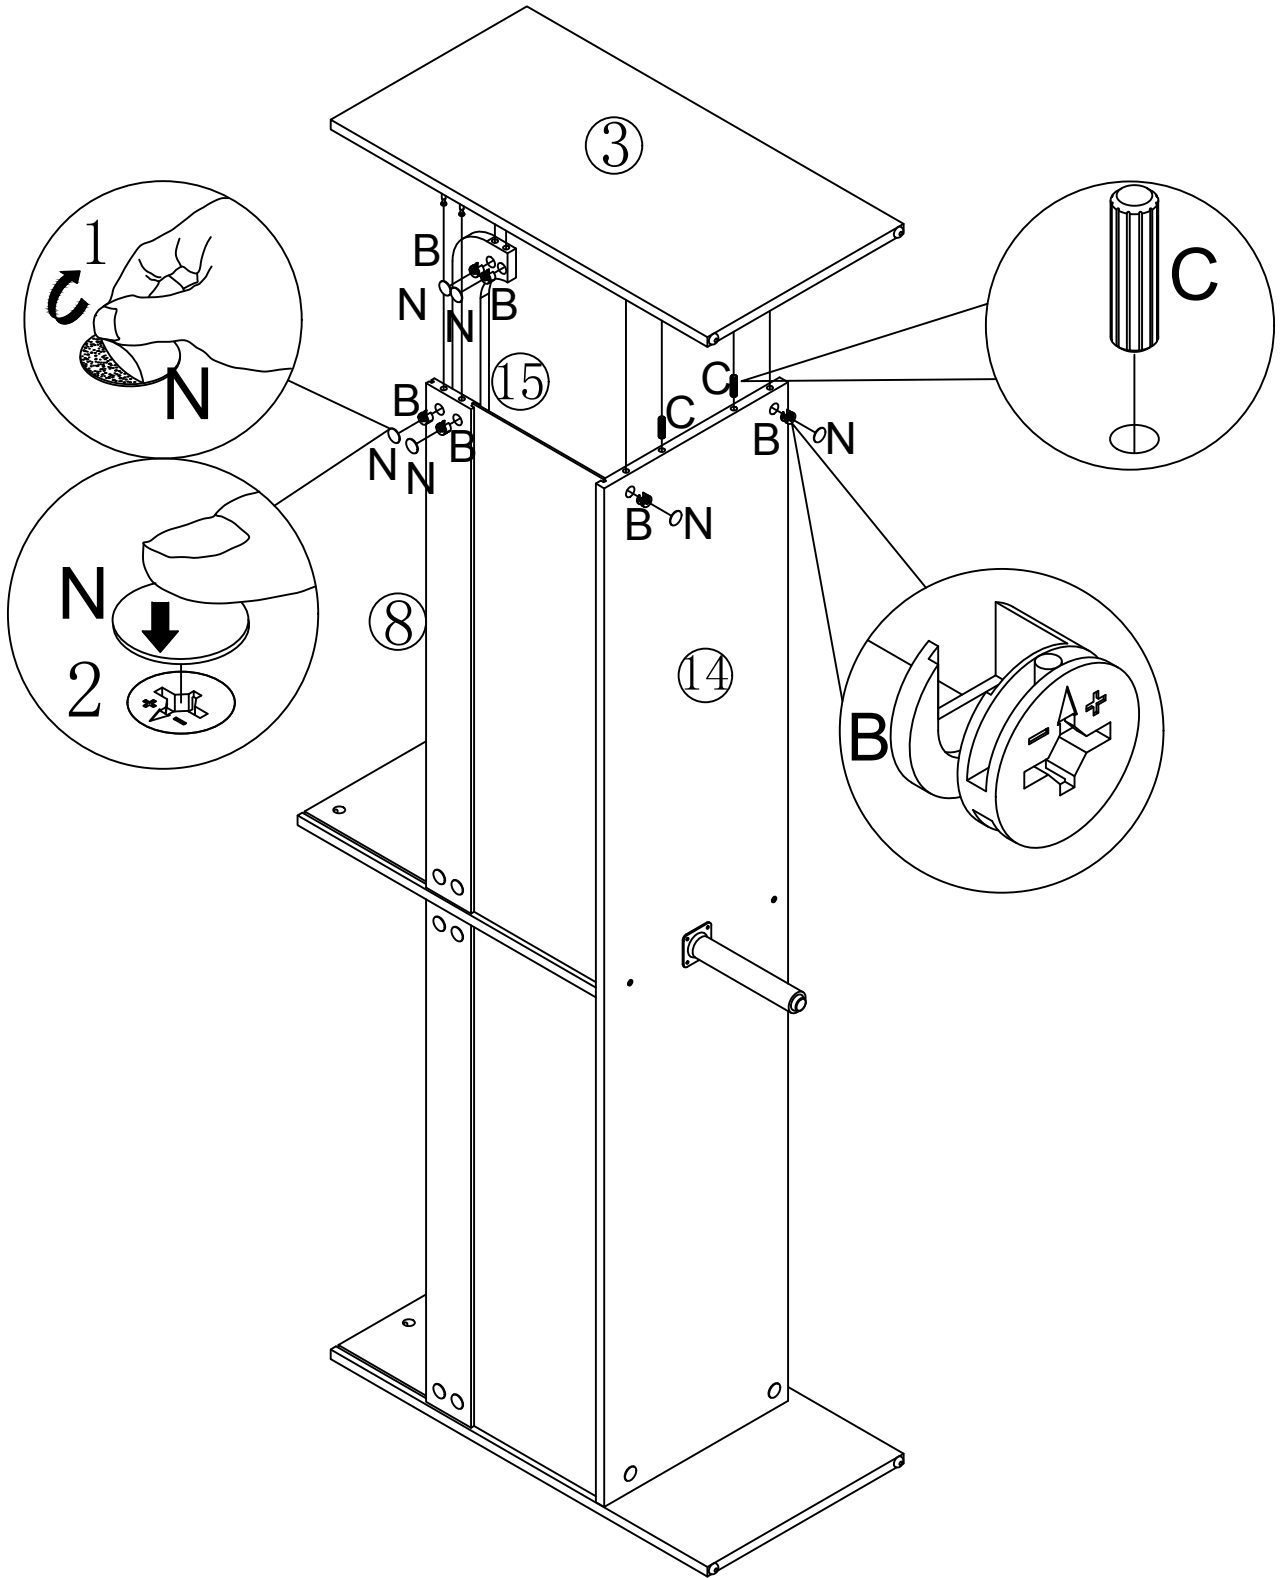


Step 10

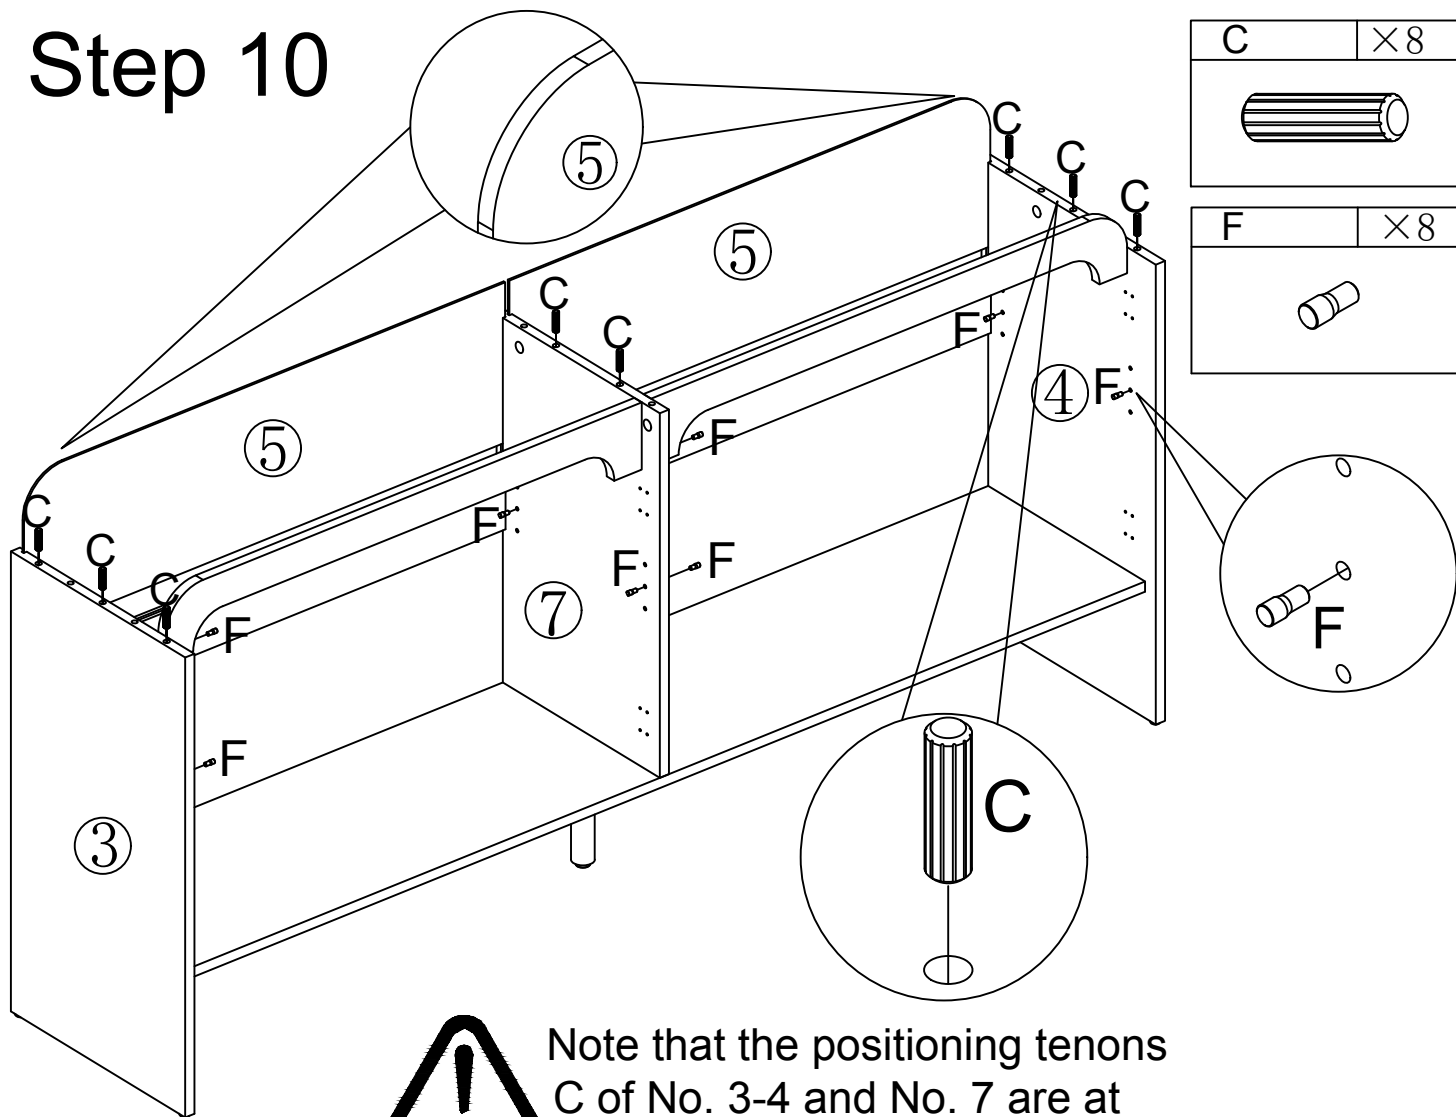



Note that the positioning tenons C of No. 3-4 and No. 7 are at different positions


Step 11

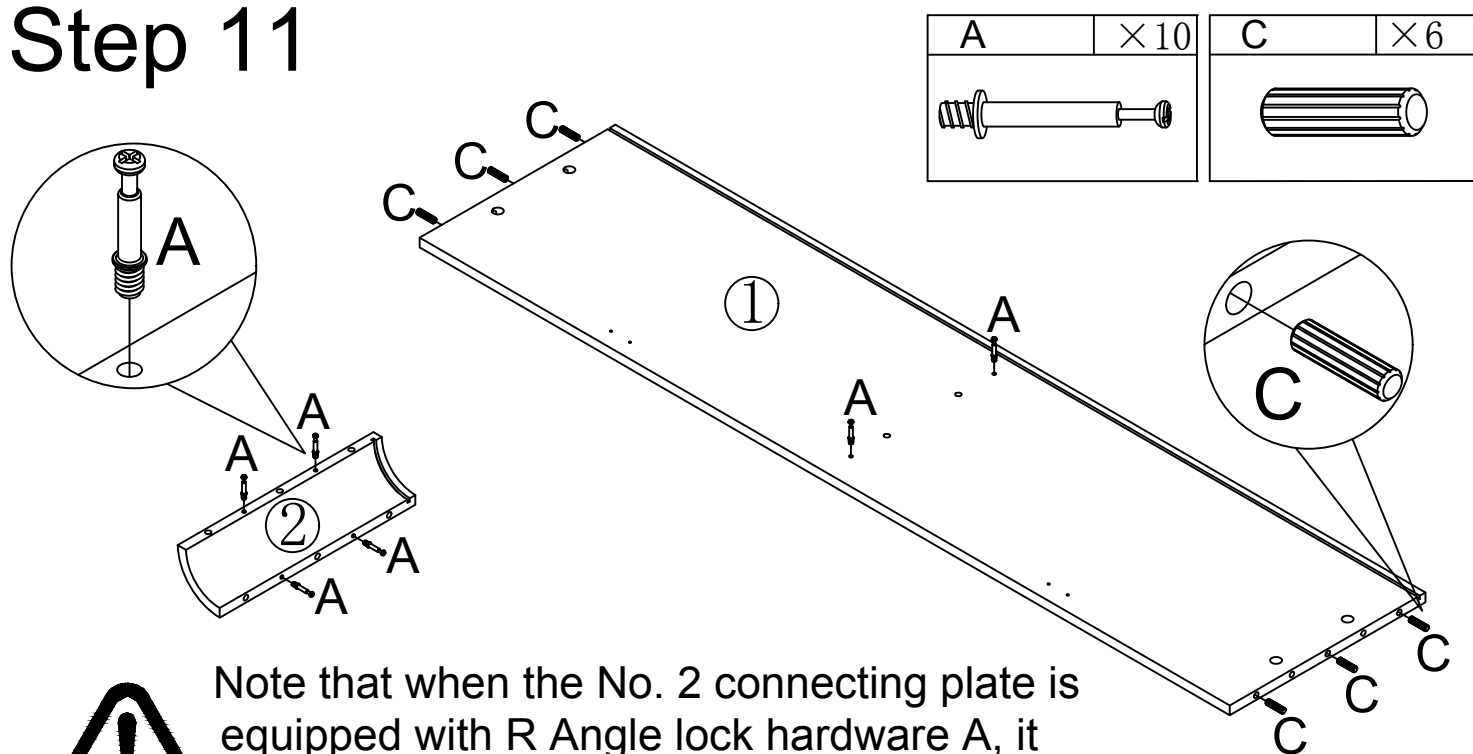



Note that when the No. 2 connecting plate is equipped with R Angle lock hardware A, it should be locked straight, not crooked, not very tight, and the normal lock is flat


Step 12

B	×4	N	×4
			

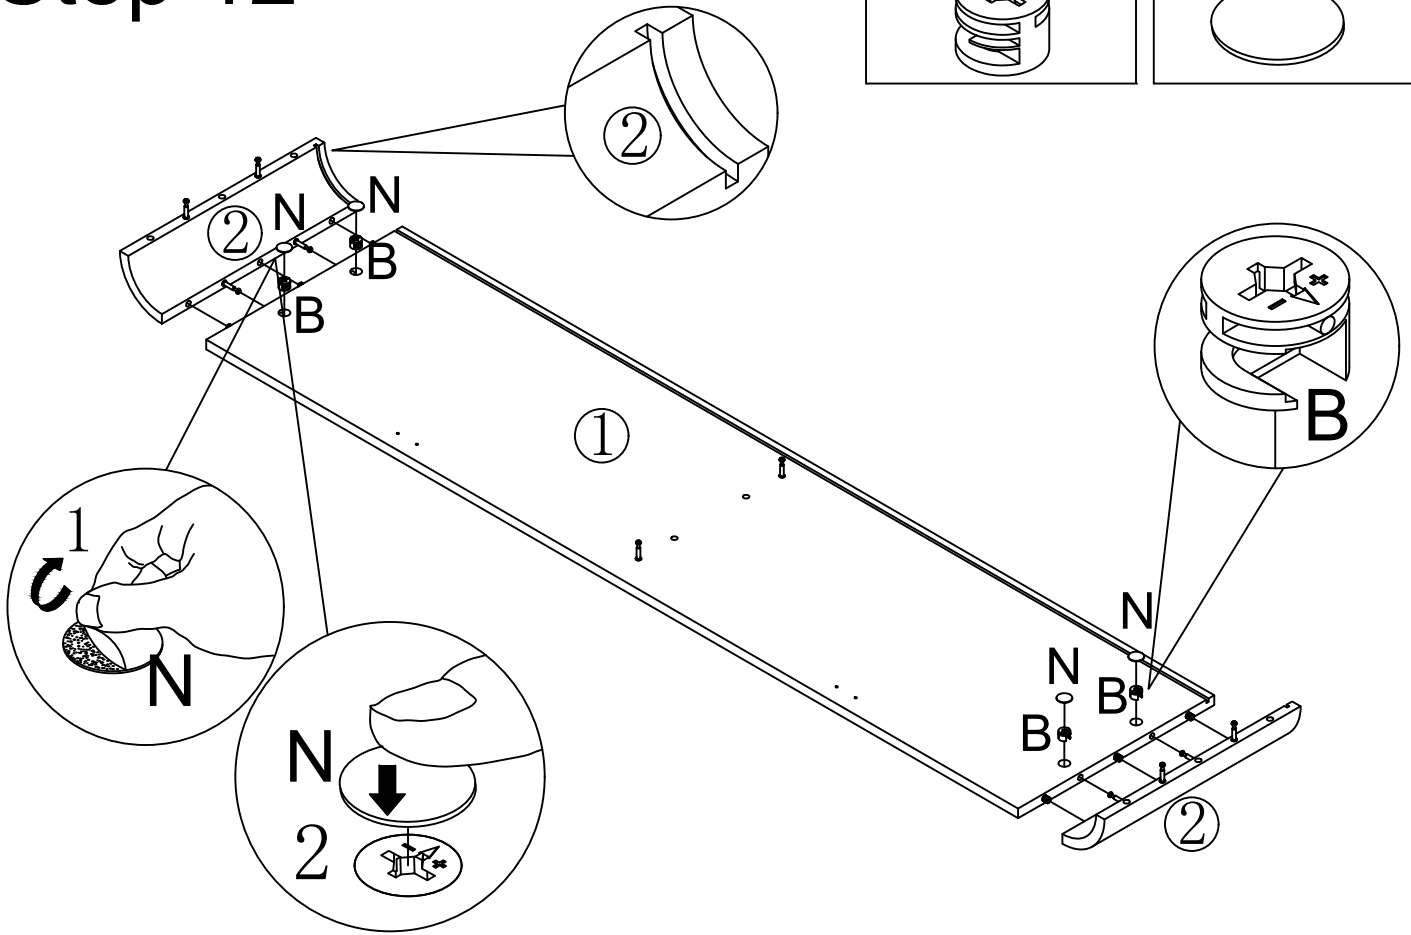


Step 13


S	×2	T	×4
			

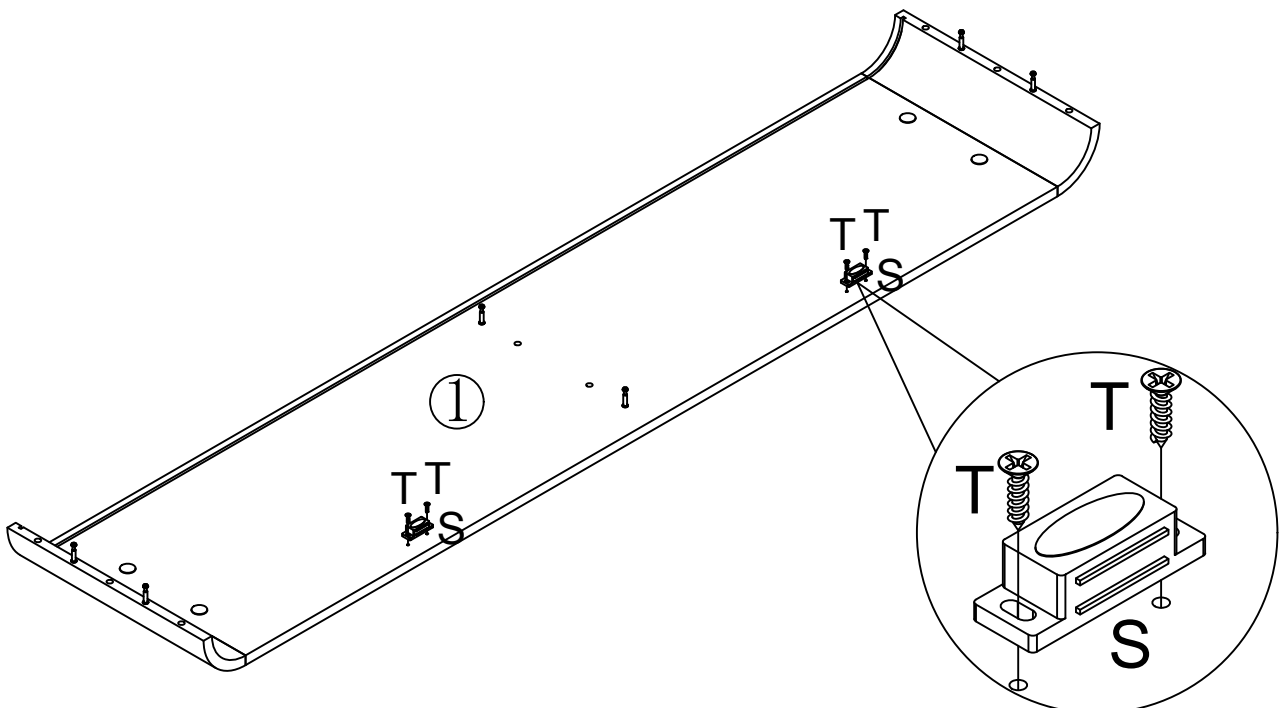





Step 14

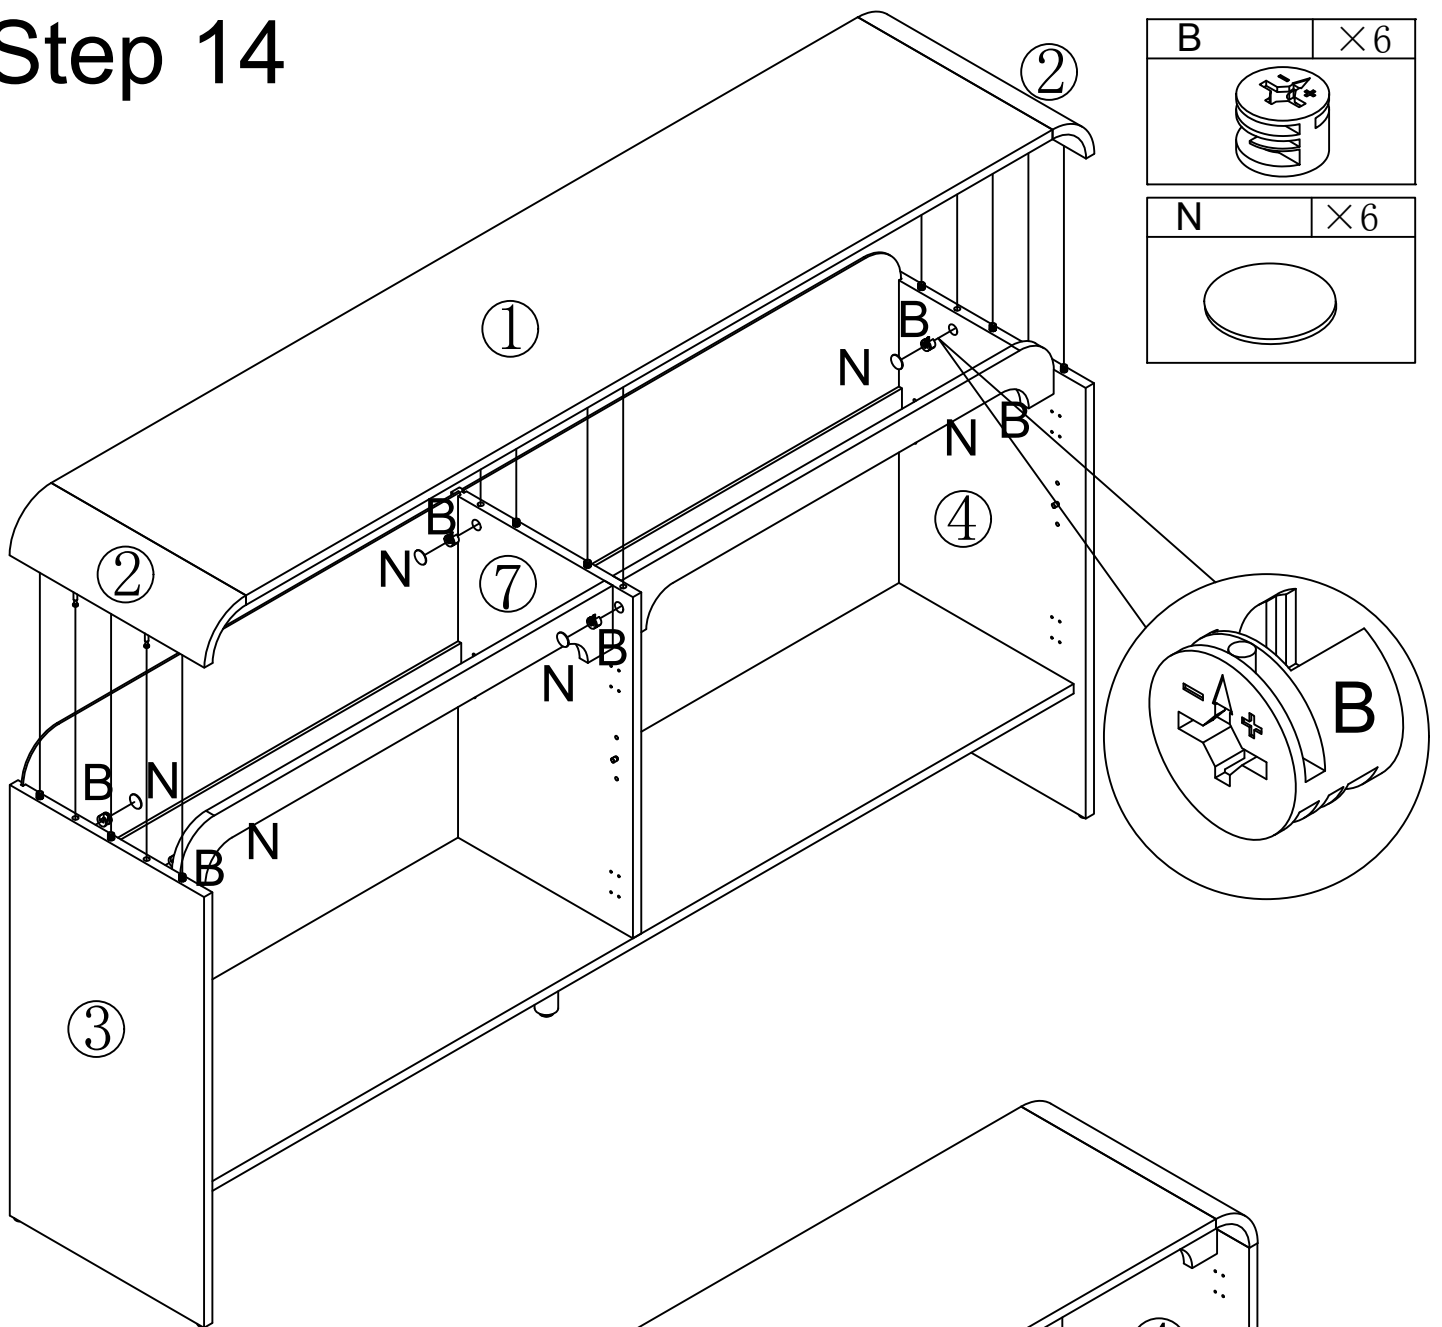


Step 15

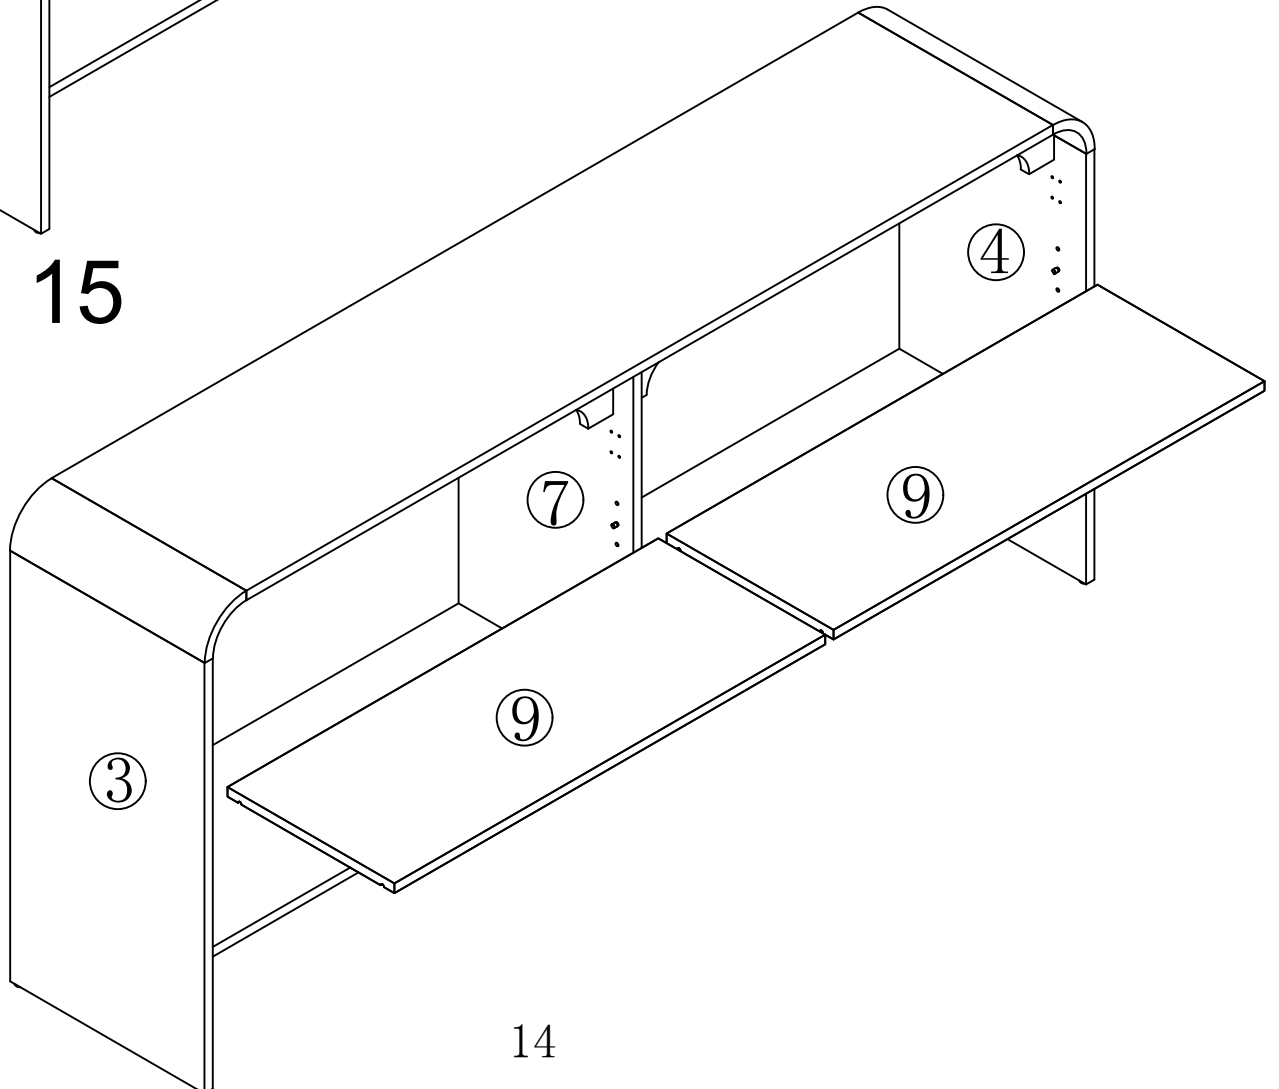





Step 16

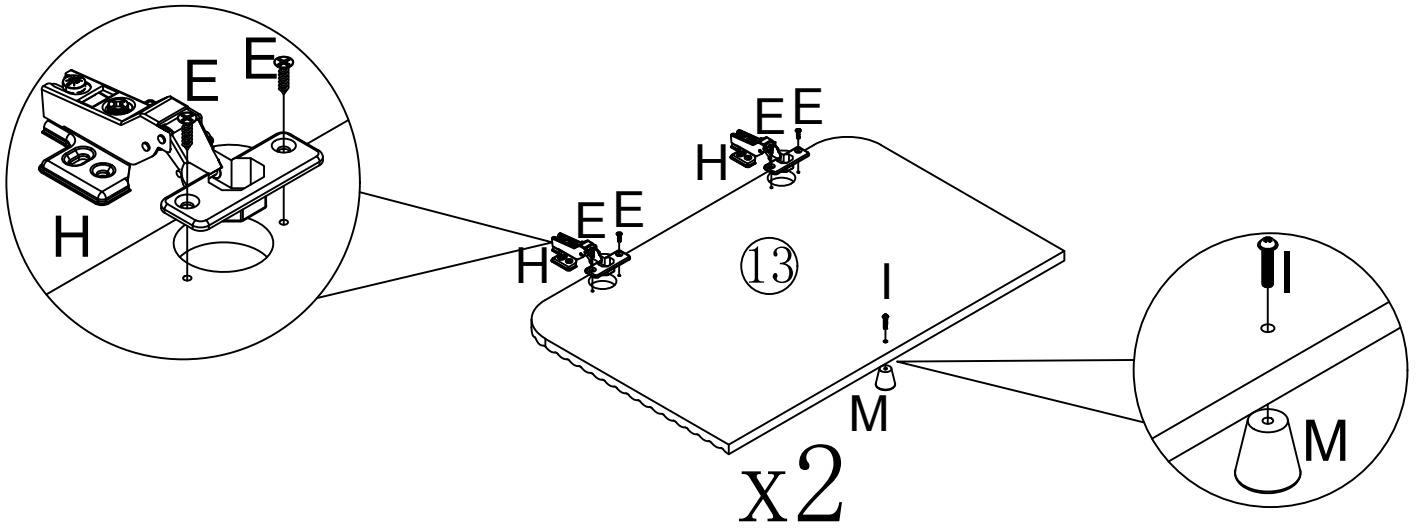
E	×8	H	×4	I	×2	M	×2
							




Note that in this step, the "H" and "R" in the hardware are quite close. Be sure to use "H" and don't get it wrong


Step 17

E	×8	I	×2	M	×2	R	×4
							




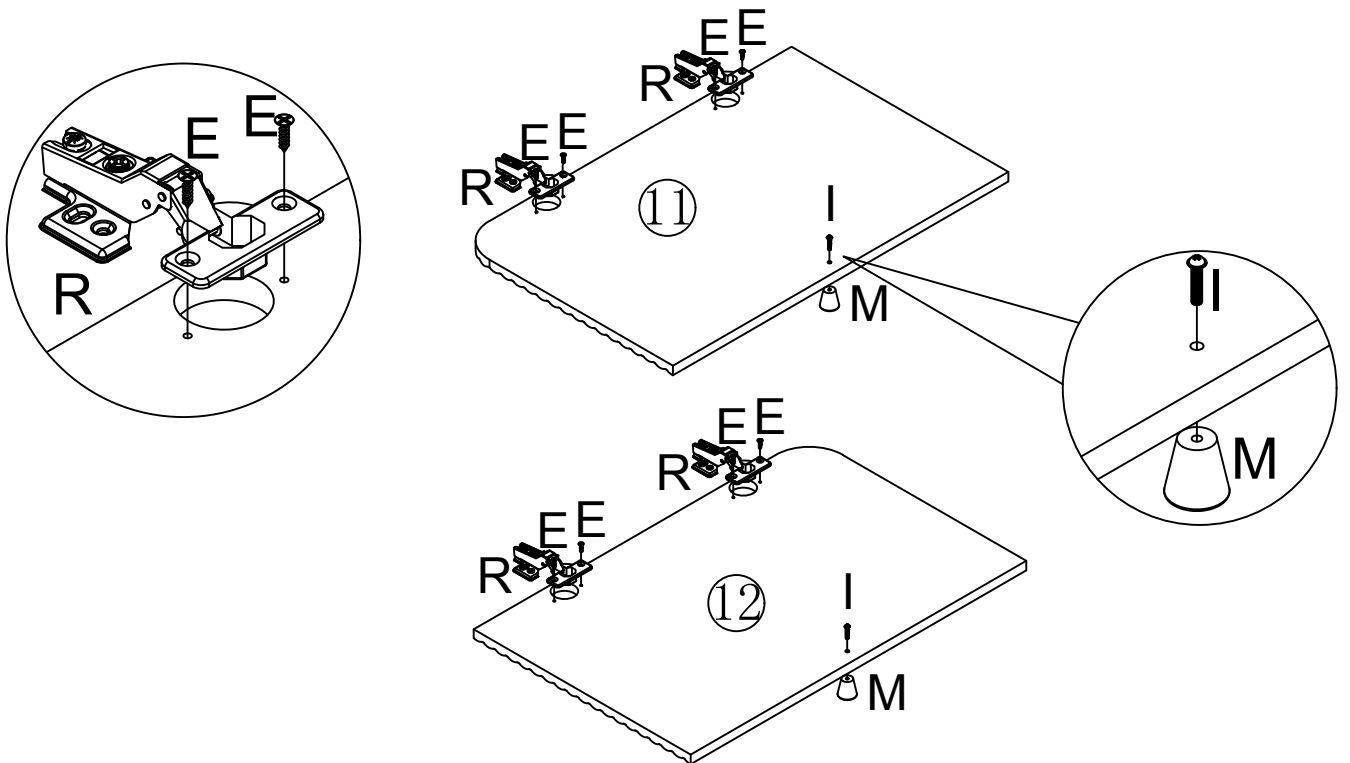


Step 18


E	×16
	






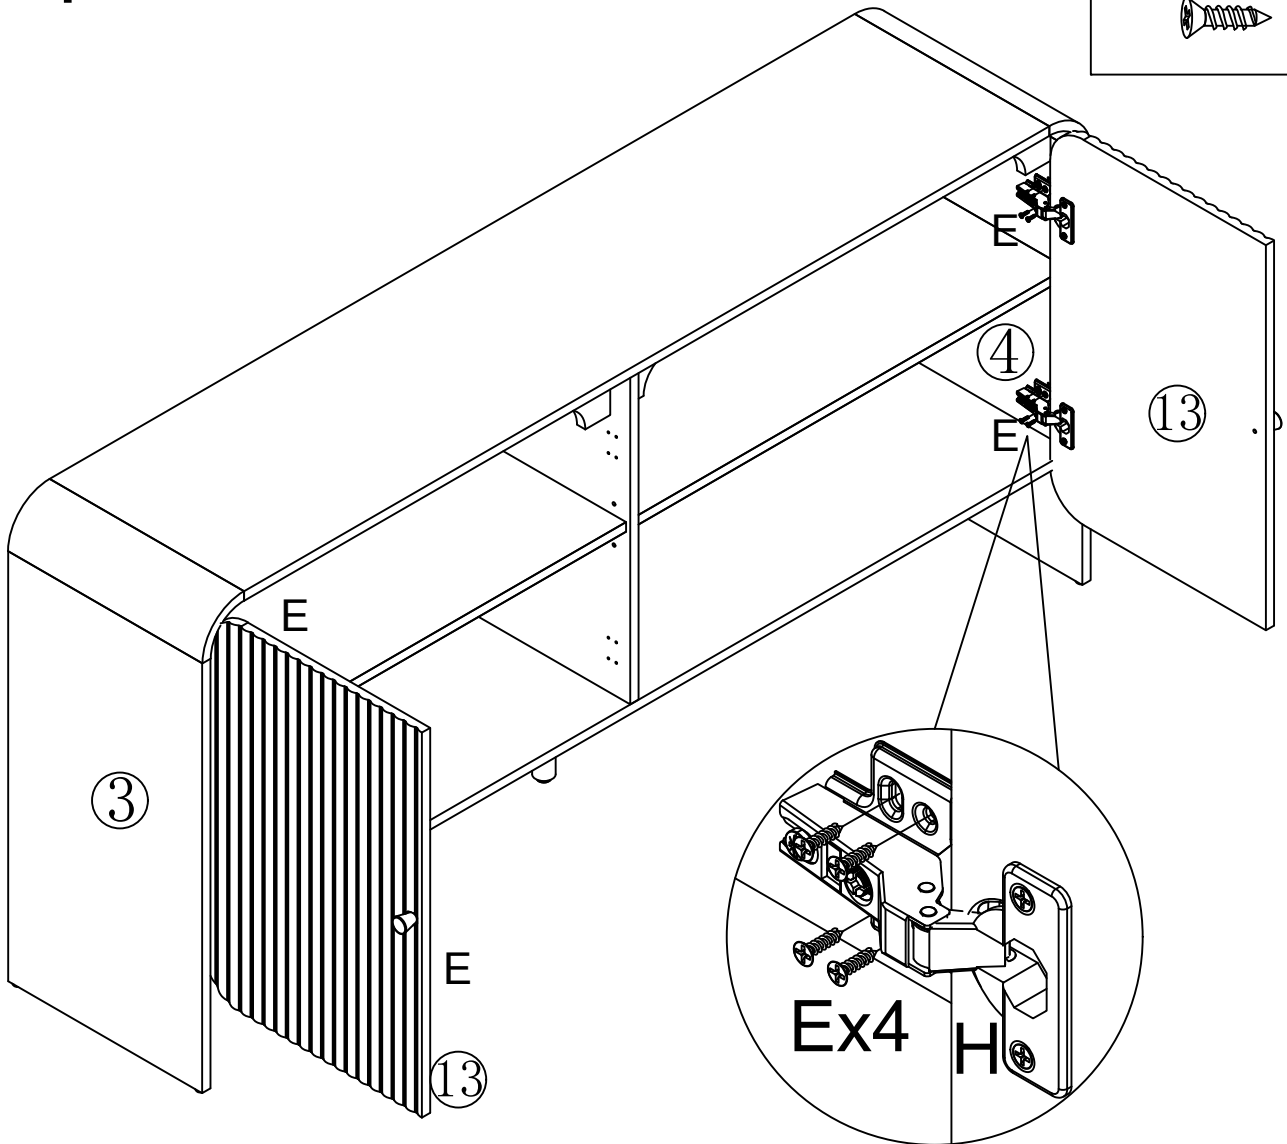


When opening Door No. ⑬, if the upper arc of the door touches the arc connection bar No. ②, you can adjust the hardware H to increase the gap of the door a little to avoid scratches

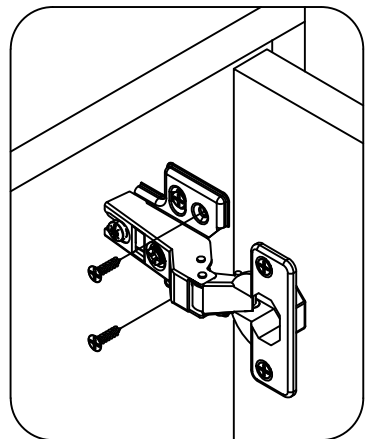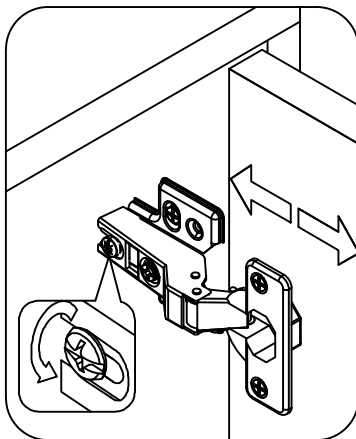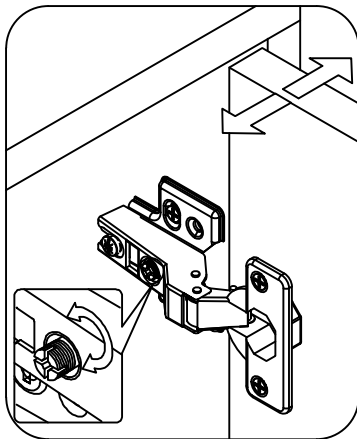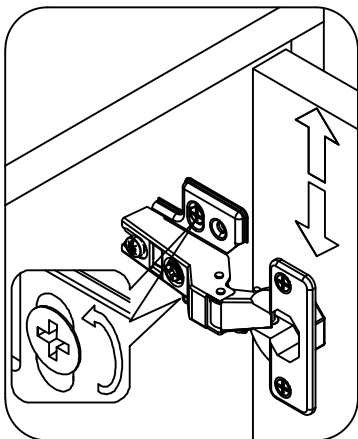


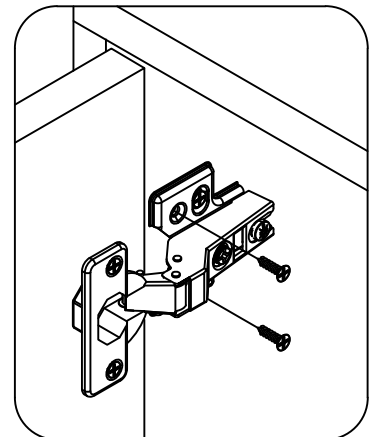
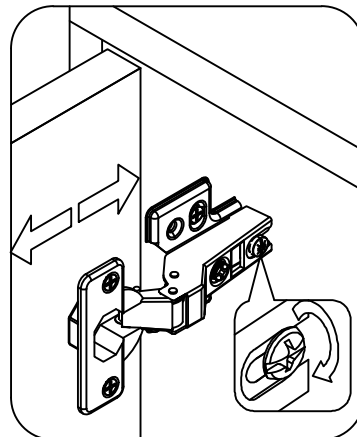
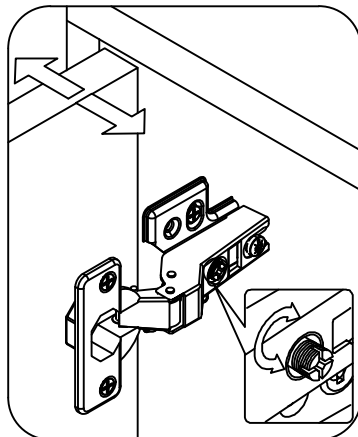
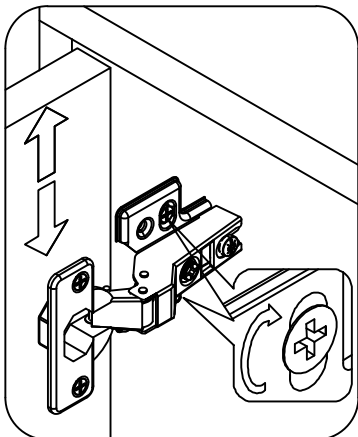
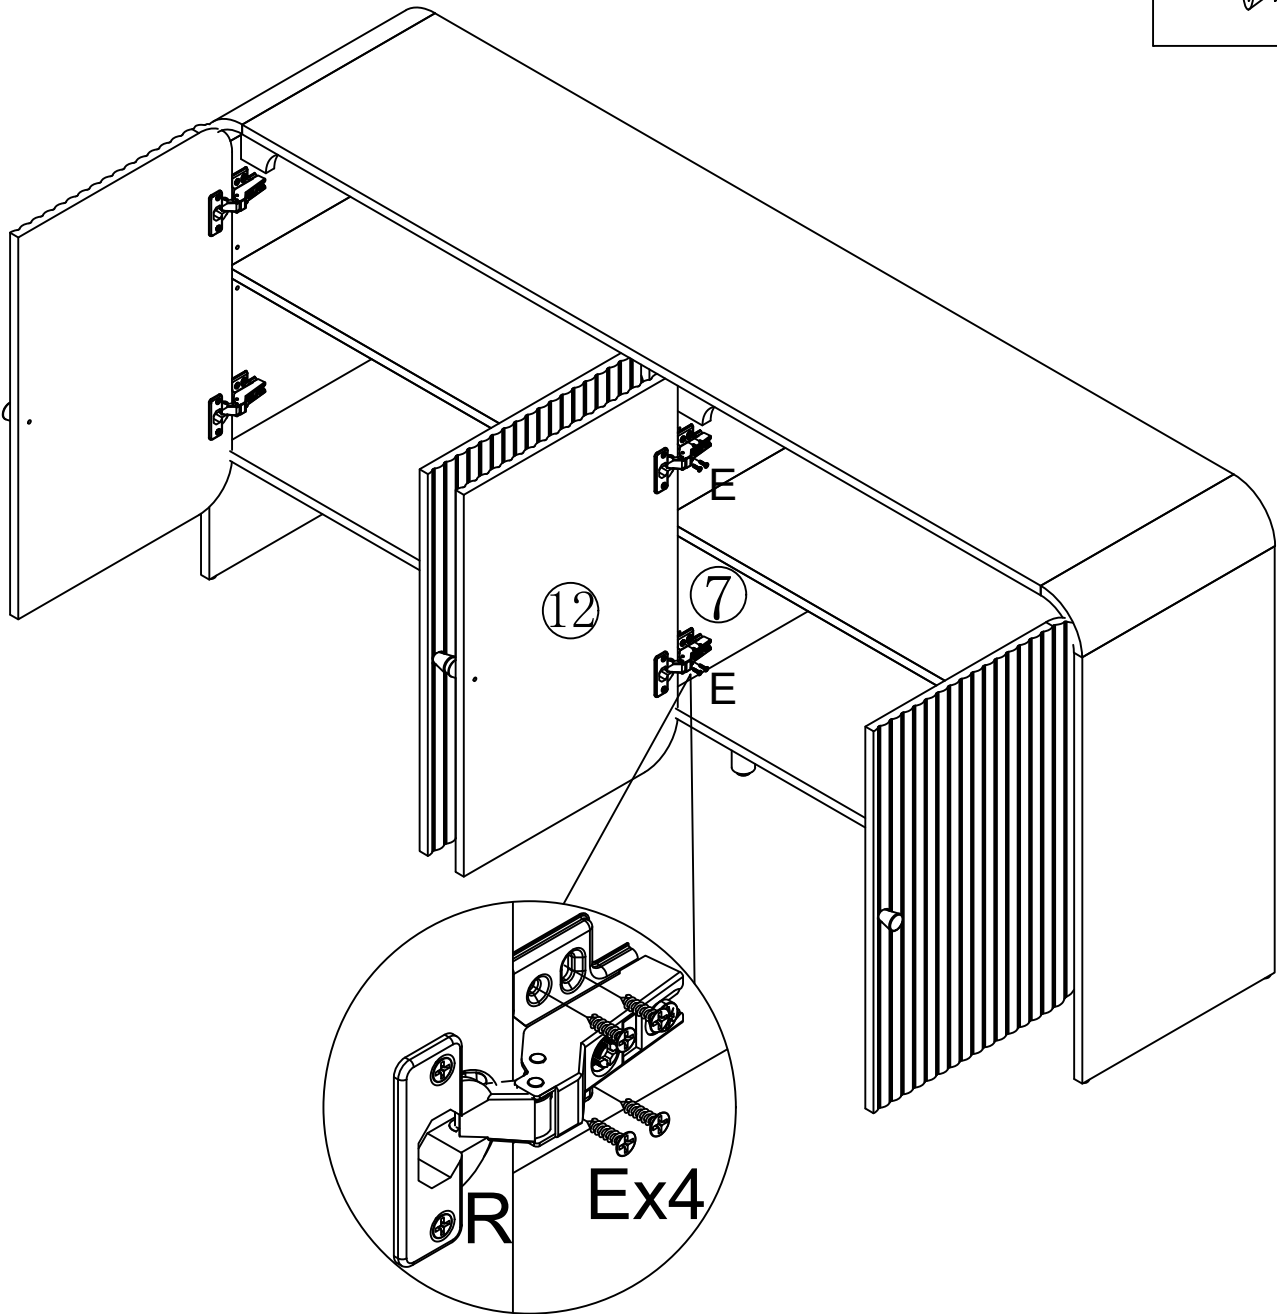
Step 19

E	×8
	

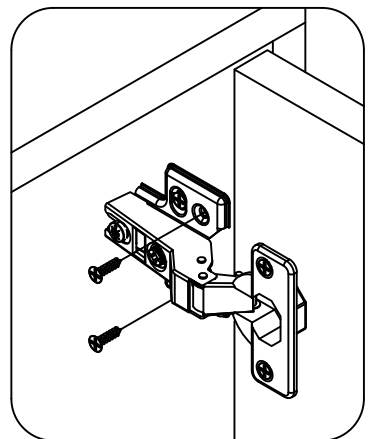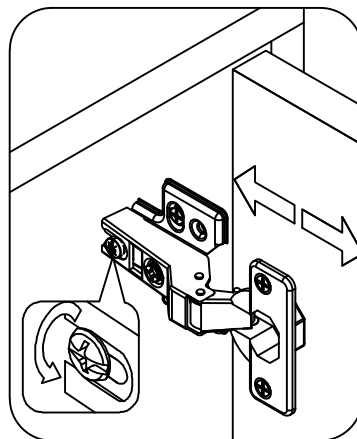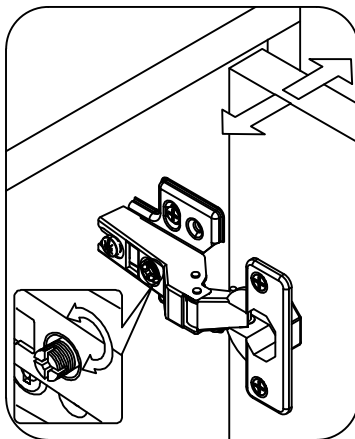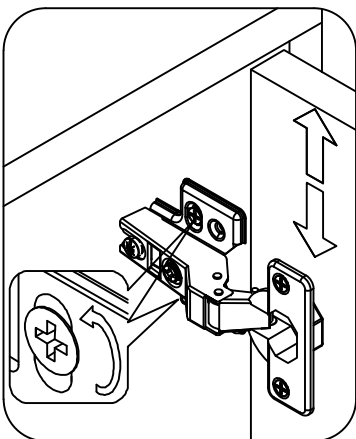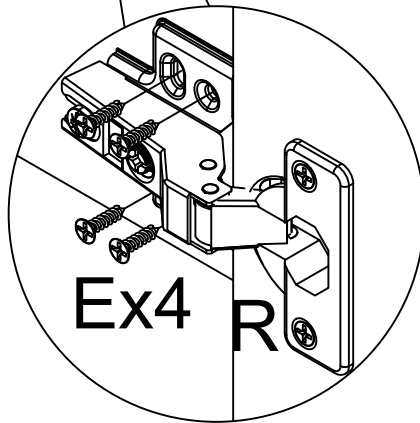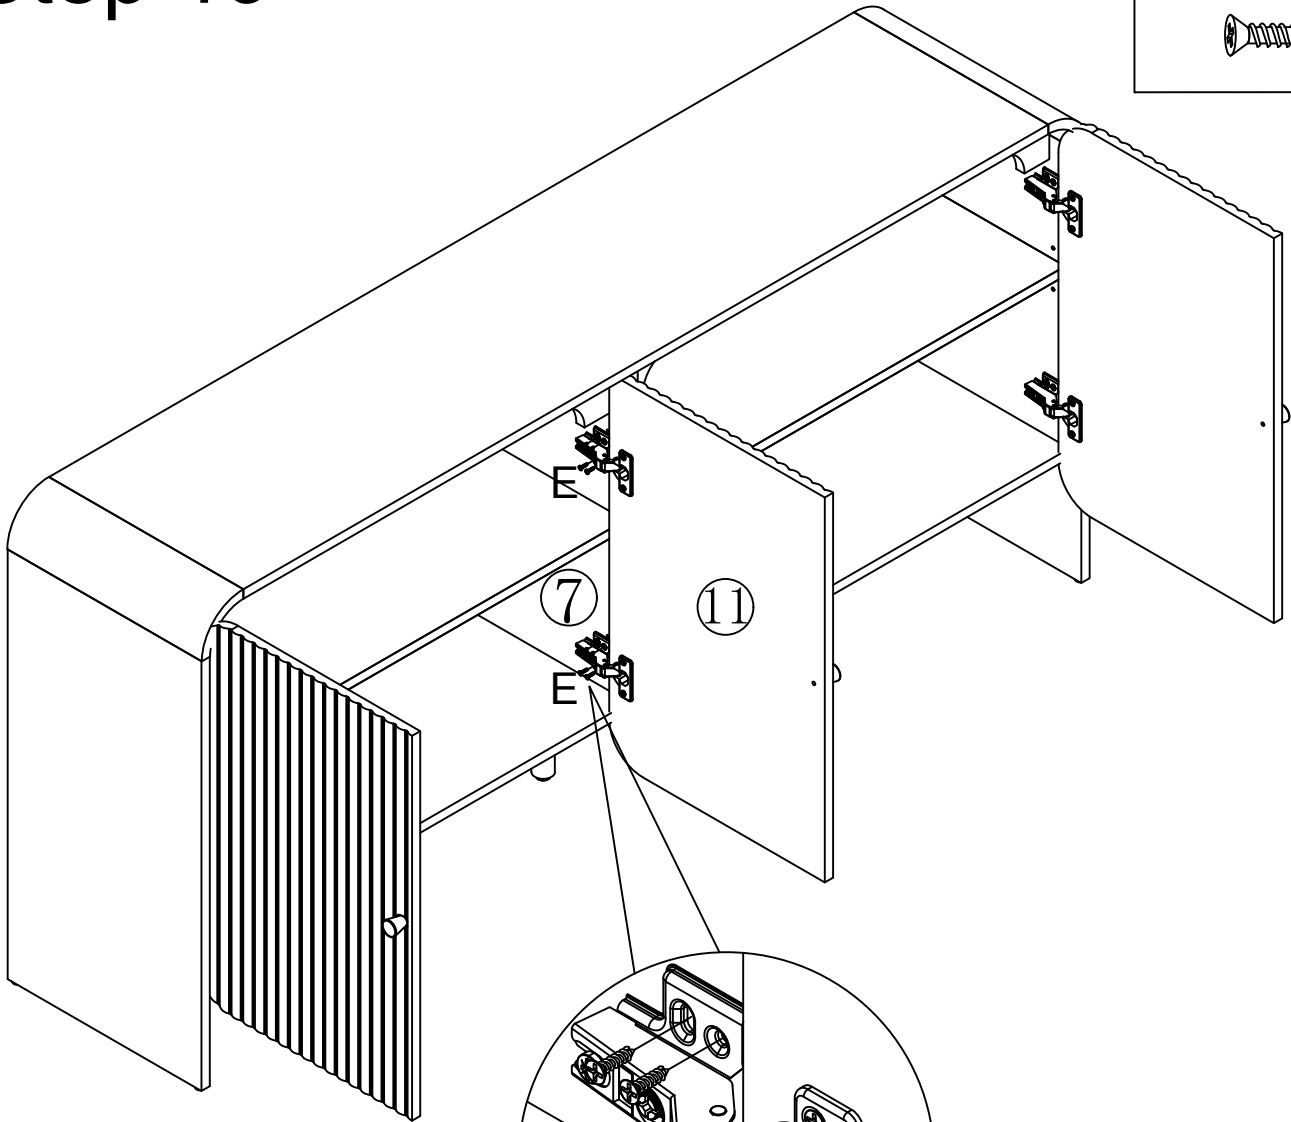




Step 20

E	×8
	







Step 21

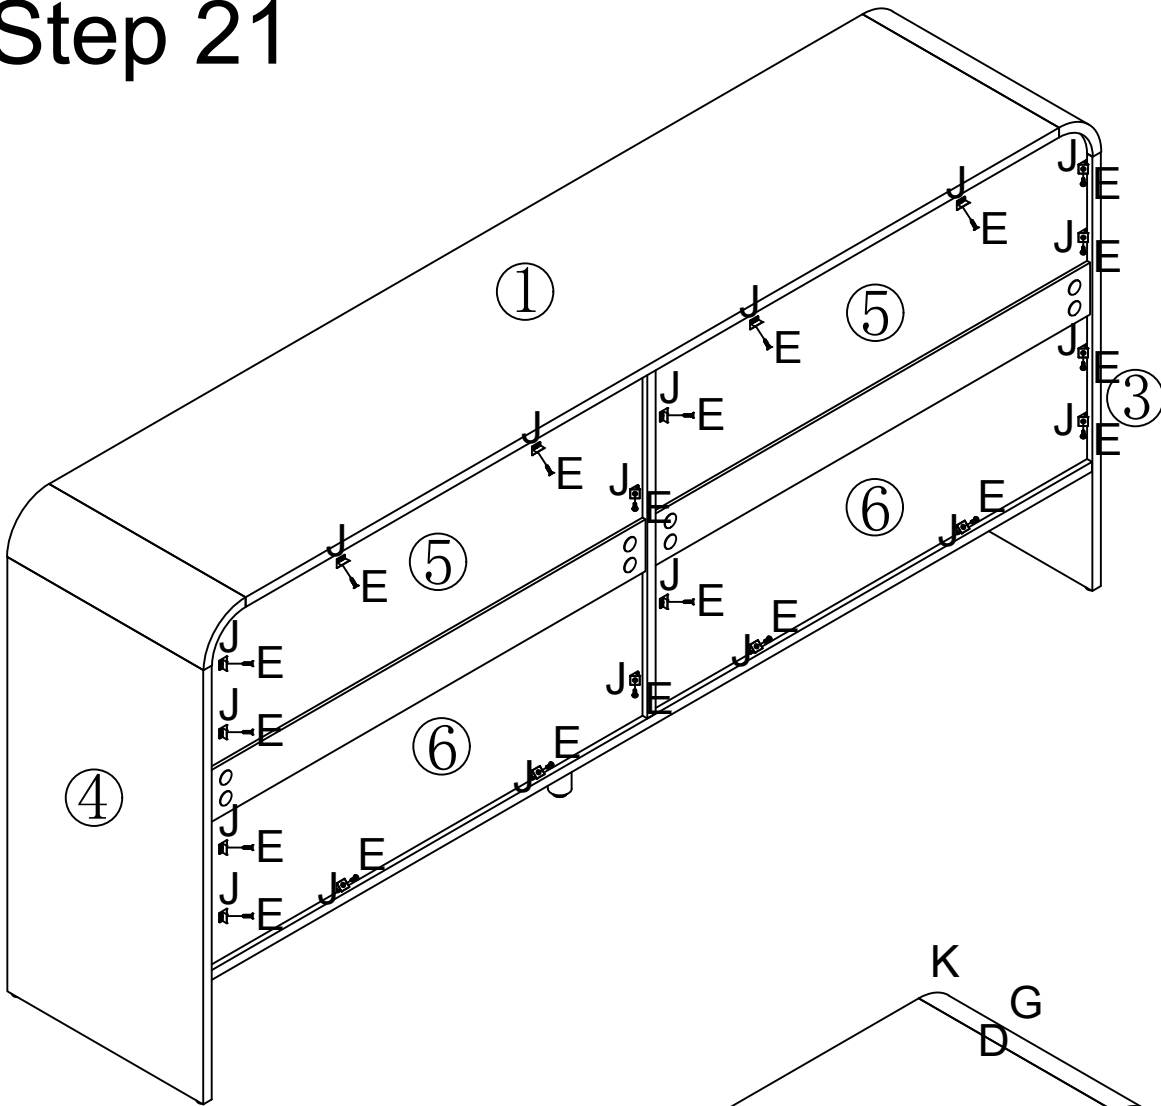


E	×20
	
J	×20
	


Step 22

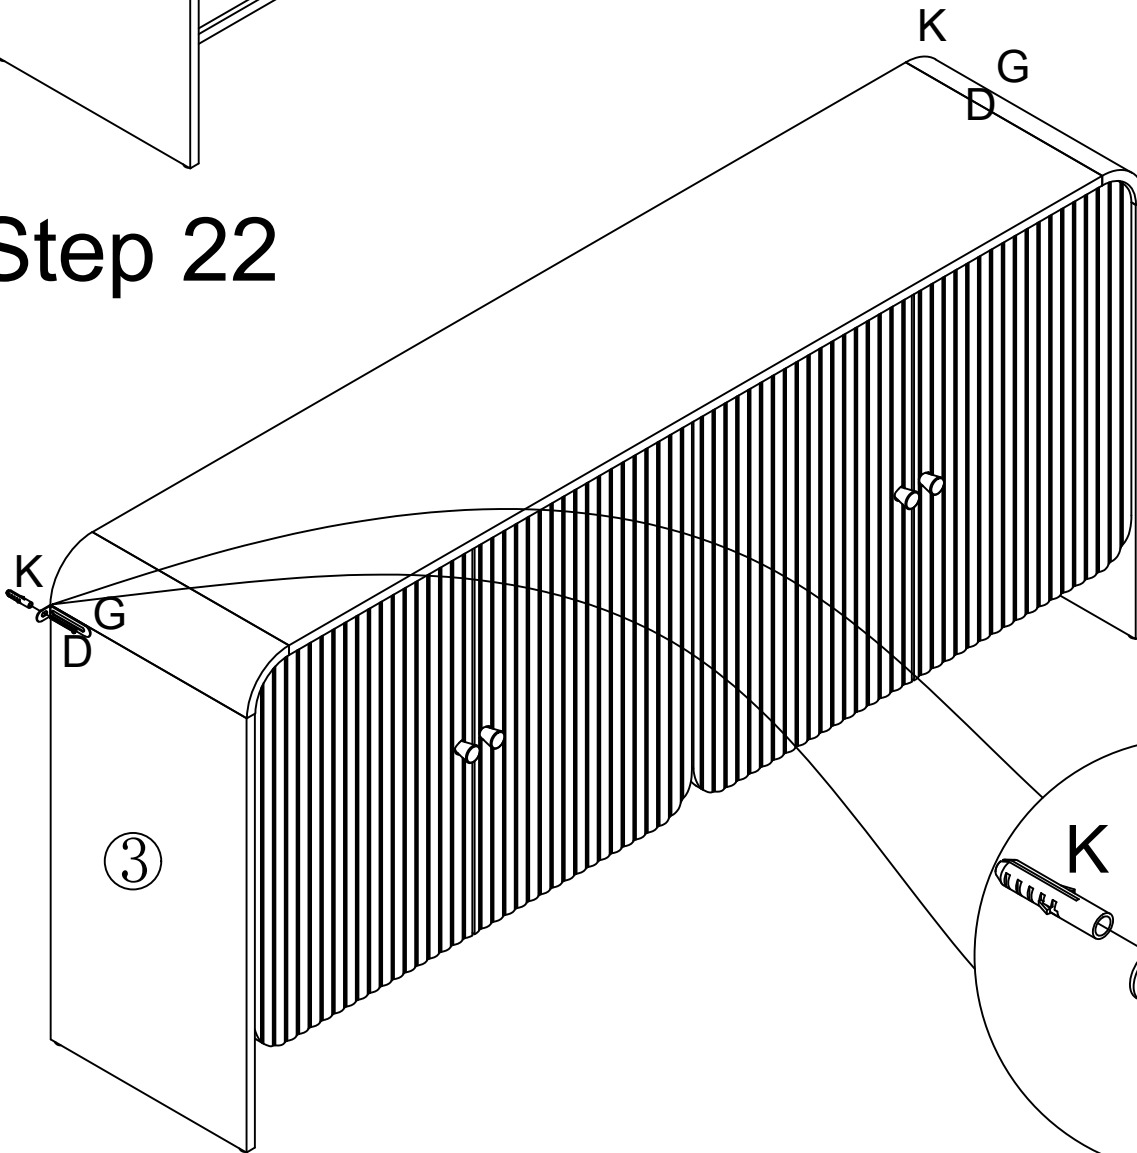


D	×2
	
G	×2
	
K	×2
	

Step 23




E	×2
	

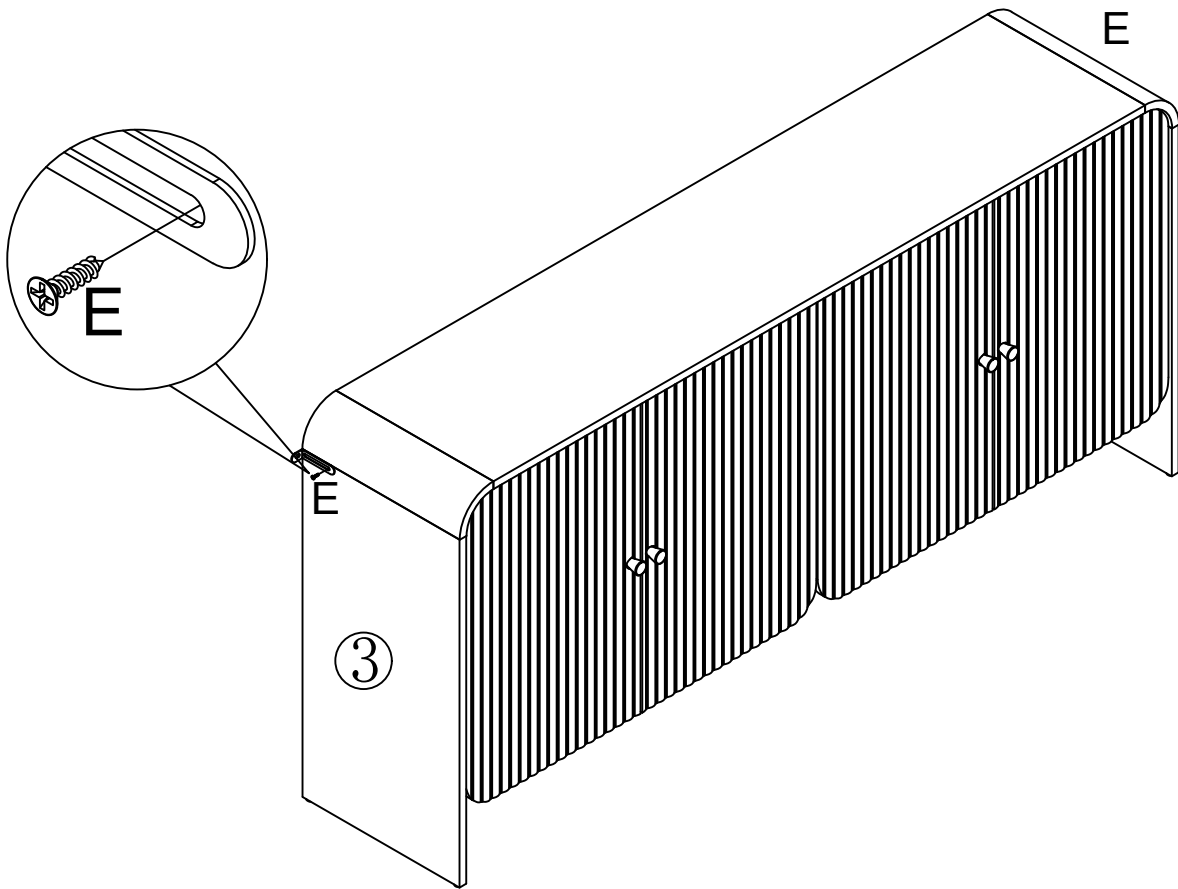

Step 24

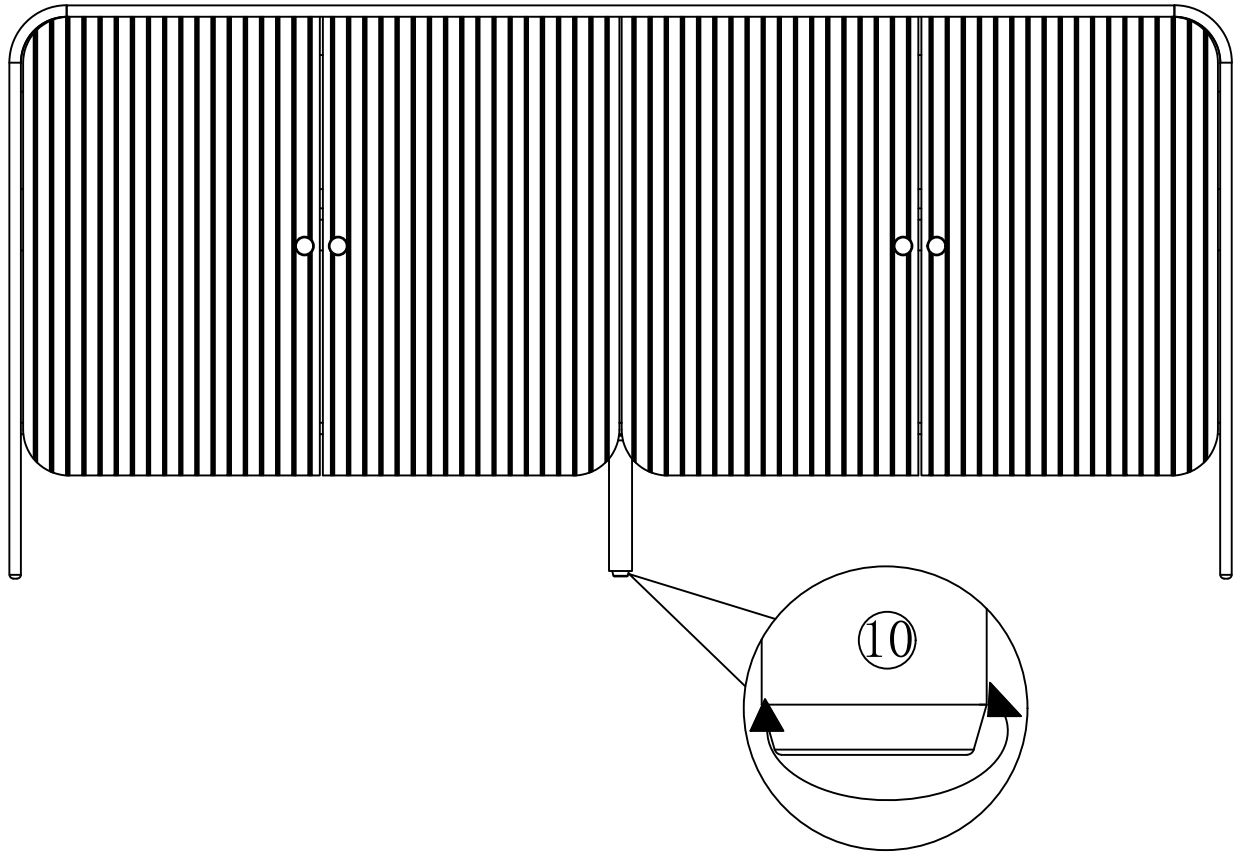

If the center position of the cabinet is too high or too low due to uneven bottom plates or other reasons, adjust the adjustable foot pads on feet ⑩ to adjust the upper and lower height



Two people work together to move the table. Make sure you lift it off the ground. Don't push and pull.