


Package Contents

Part	Description	Quantity
A	Mounting Bracket	1 pc.
B	Fixture Arm	multi pcs.
C	Canopy	1 pc.
D	Acrylic Shade	multi pcs.

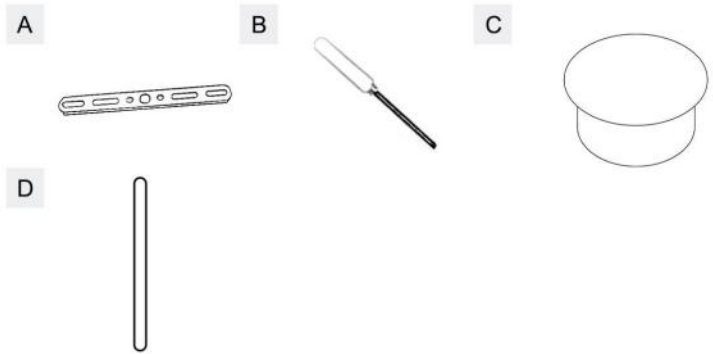

STEP 1

Mark the drilling position on ceiling with the help of the Mounting Bracket(A).
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Mounting Bracket(A) to the expansion anchors with self-tapping screws.

STEP 2

Screw the Fixture Arm(B) to the Canopy(C).
Repeat the above step to fix the other Fixture Arms(B).
Fix the cover to the Canopy(C).

STEP 3

Connect wires color Brown/Black/Red from the Canopy(C) as one strand of wire.
Connect wires color White/Blue of Canopy(C) as the other strand.

STEP 4

Secure the Acrylic Shade(D) to the Fixture Arm(B).

STEP 5



Hold the fixture close to ceiling.
Connect live line to wire color Brown/Black/Red from the Canopy(C).
Connect neutral line to wire color White/Blue from the Canopy(C).

STEP 6

Attach the Canopy(C) to the Mounting Bracket(A).


Step 1:

Unpack and remove the chandelier. Then securely fasten each light arm into the bracket with a nut as shown.

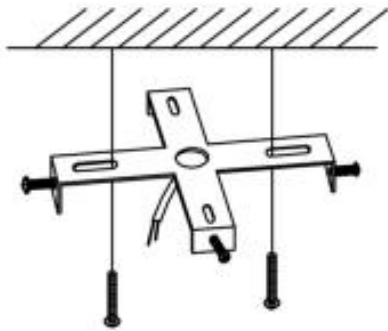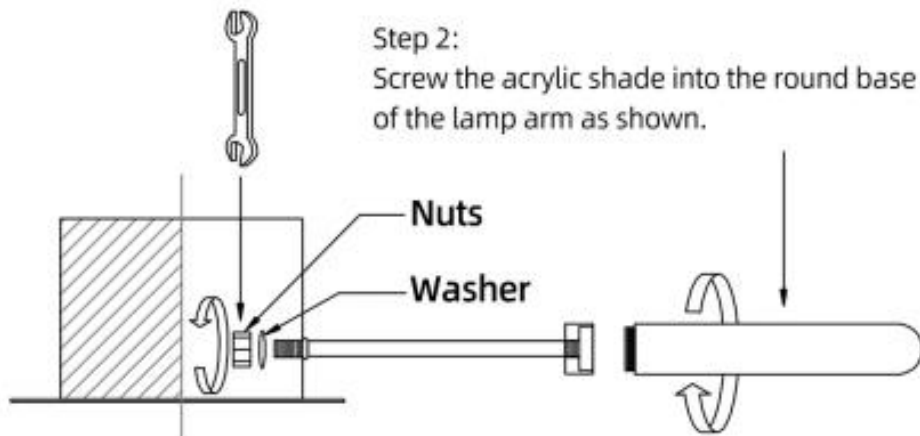

Step 3:

As shown in the diagram.
Attach the pegboard to the ceiling of the room using the screws in the accessory kit.



Step 4:

Then connect the input terminals of the light driver to the household power line as shown.

Step 5:

Lift the lamp base up and Rotate a small angle to let the screw into the hole corner of the base as shown in the picture. Finally fix the lamp base on the hanging plate with screw.

