
Owner Manual




MAINTENANCE AND WARNINGS

Thank You For Choosing Our Furniture.
Please read the instructions and warnings carefully before use, to ensure safe and satisfactory operation of this product.


NOTE :
This brochure contains IMPORTANT safety info. Please read and keep it for future reference.

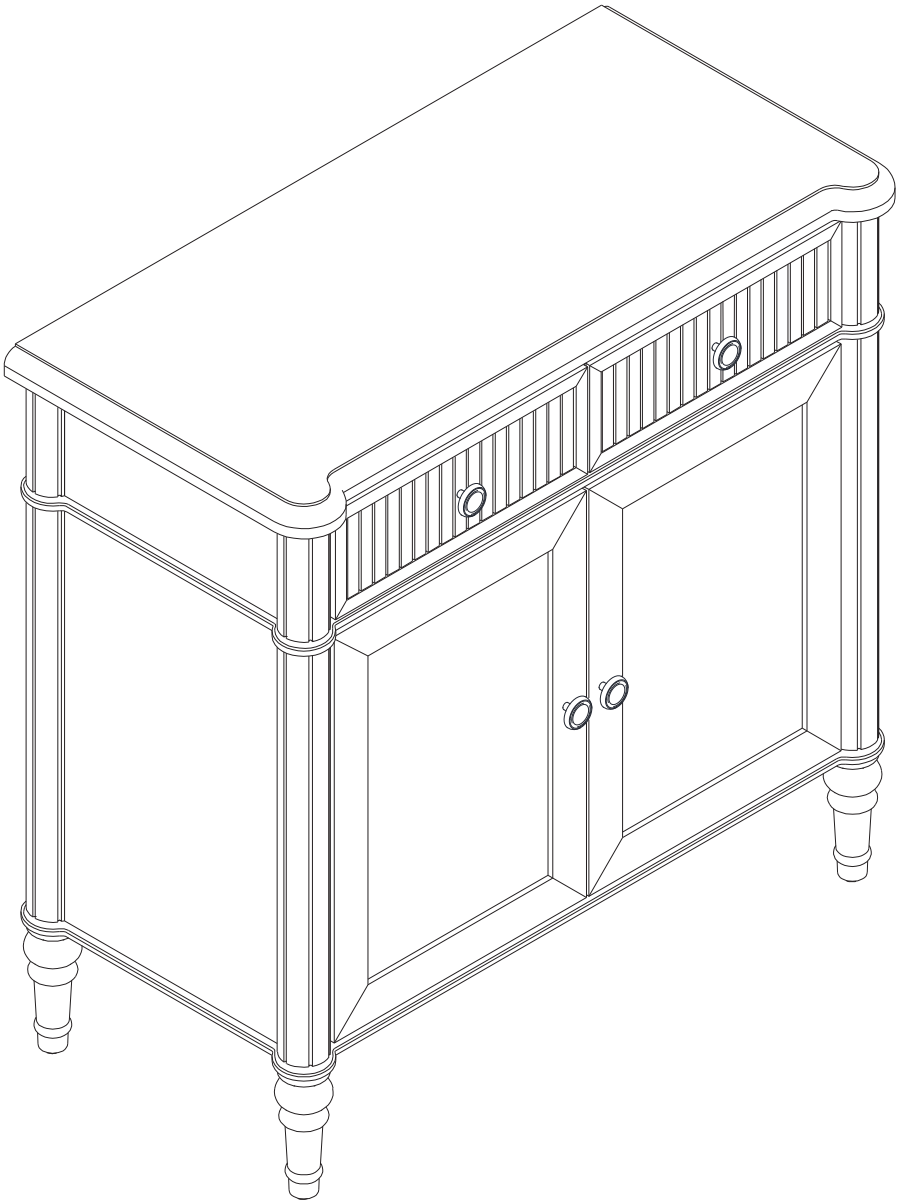

Weight Limitation
200 LBS



Installation:
30 minutes.



Two Person



Before You Start

Please follow the steps below:

- Unbox the package and check if all parts and accessories are complete.
- If you find something missing, stop assembly and contact your supplier immediately.
- Please do not completely tighten all the hardware until the entire assembly is completed! Be sure to tighten all the hardware once the assembly completed.
- NOTE:Should be assembled on soft surface to keep balance.

After-Sales Service

- If you encounter any issues or need technical support during use, please contact our after-sales team. We offer long-term maintenance and warranty services.

Warranty

We strive to offer high , quality products, and we also try our best to satisfy each and every customer that orders from us with product or service as needed. Each customer must provide a record of their order such as the order number, or item receipt for any items that are out of the warranty period you may also still receive replacement parts by purchasing them with our company if they are available.

Are you having dificulty with assembly? Missing parts? Please send email with your order number


For return, please check the return policy with the retailer or market place you bought from. Appreciate your purchasing from us. Pop up your life by our furniture piece!

Daily Maintenance

- Keep furniture away from heat.
- Do not use cleaning agents containing acids, alkalis,or corrosive substances, as they may damage the surface. It is recommended to use neutral cleaning agents or specialized furniture cleaners.
- Do not place furniture under direct sunlight, material will possibly fade over time.
- Do not use on site dry cleaning machine.
- Children should not climb or jump on the furniture.
- Do not write on furniture without a padded barrier to protect the surface.
- Not for commercial use, for residential use only.


Exploded Diagram

Please confirm that you have received all the parts in the box and start the installation.

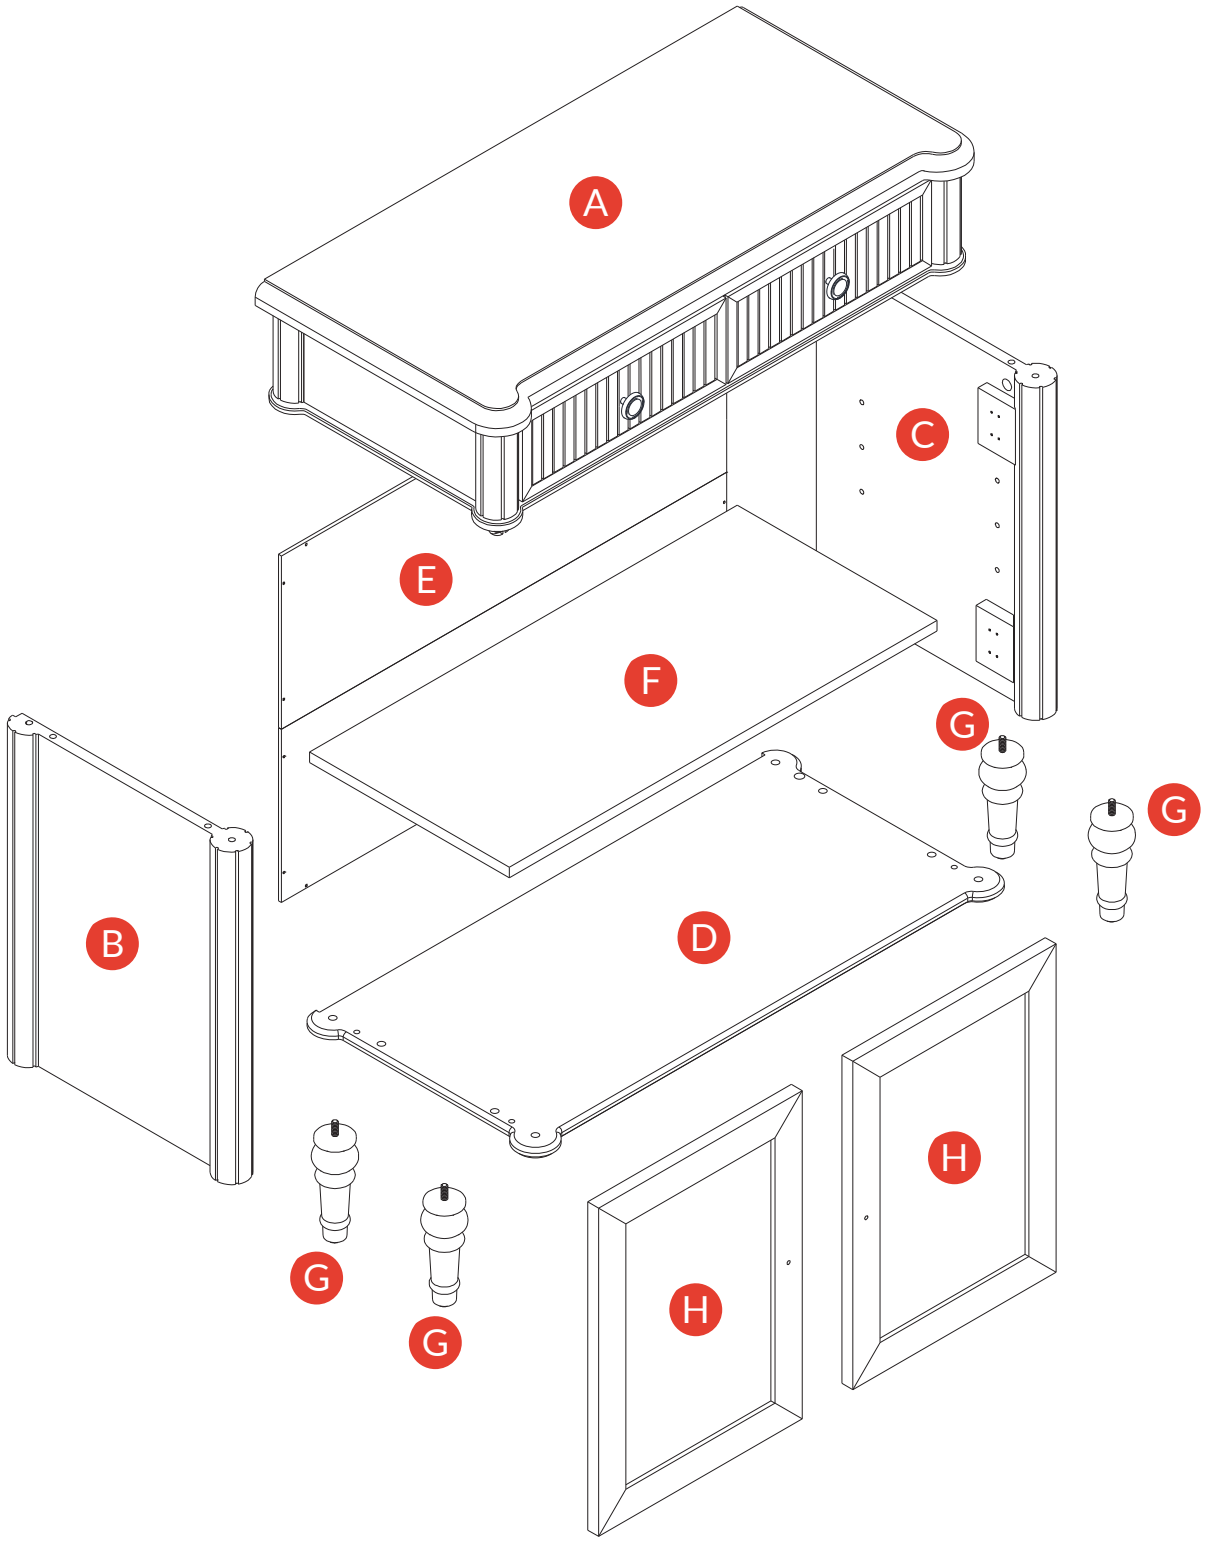


Parts List *(Carton A)*

A ×1




Panel

B ×1




Left panel

C ×1




Right side panel

D ×1




Baseplate

E ×1




back panel

F ×1




shelf board

G ×4



Legs


H ×2



Door


Hardware List (Carton A)

1 ×4




Anti-tip component

2 ×4




Self-tapping screw
D4x20

3 ×2




Hardware pack

4 ×4




Expansion pipe
L30mm

5 ×4




Self-tapping screw
D4*40

6 ×1




Screwdriver

7 ×4+1



eccentric wheel

8 ×4+1



three in one
M6x35mm

9 ×8+1




tree top
ø8*30

10 ×2




Hold hands

11 ×2+1




Pull screw
M4*20

12 ×4



Large bend hinge
Ø35 nn

13 ×16+2




Self-tapping screw
D3*16mm

14 ×24+3




Self-tapping screw
D4x16mm

15 ×4




Layer board support

16 ×1




Door stopper

17 ×2+1




Self-tapping screw
D4*30mm

18 ×4




Direct repair screw
Ø6.3x40mm

19 ×4+2



Huamei Patch

20 ×1




Hex wrench
M4

ASSEMBLY INSTRUCTIONS

Step 01

Insert the 3-in-1 (8) screw into the corresponding hole (A) and tighten it with screwdriver (6). Pass screw (17) through door stop (16),insert it into the corresponding hole (A),and tighten it with screwdriver (6) .


8	x 4	M6x35	6	x 1	Screwdriver
17	x2	M4x30mm	16	x 1	Door stopper

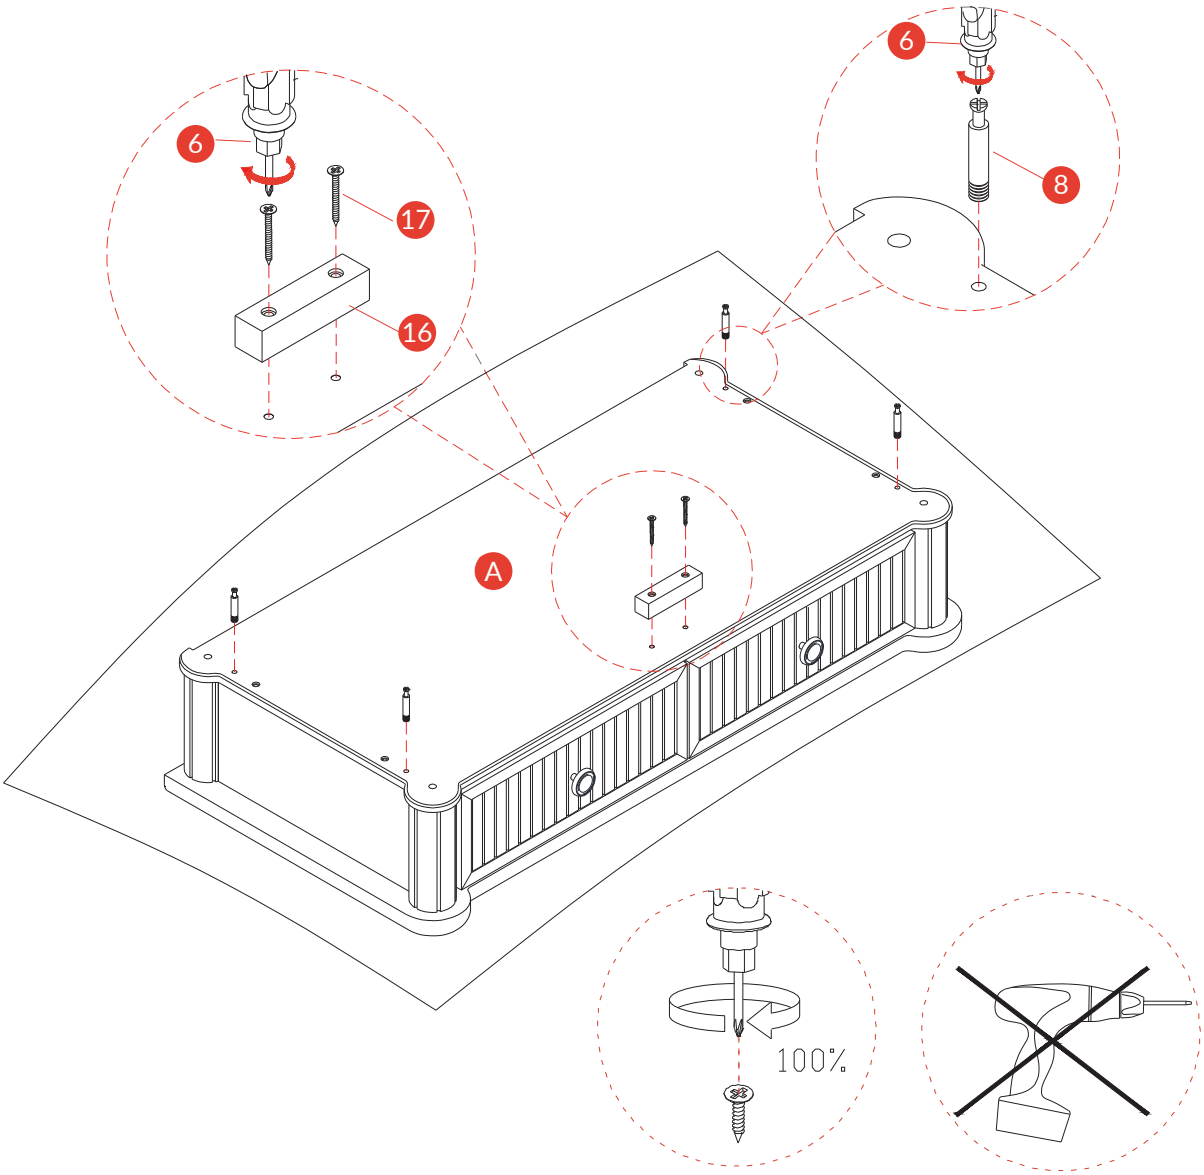

Step 02

Install tree top (9) into the corresponding hole on (A), then attach side panels (B/C). Next, insert eccentric wheel (7) into the corresponding hole on side panel (B/C) and tighten it with screw-driver (6). Cover the eccentric wheel with ring sticker (19).


9	x 4	Ø8x30mm	19	x 4	Huaei Patch
7	x 4	eccentric wheel	6	x 1	Screwdriver

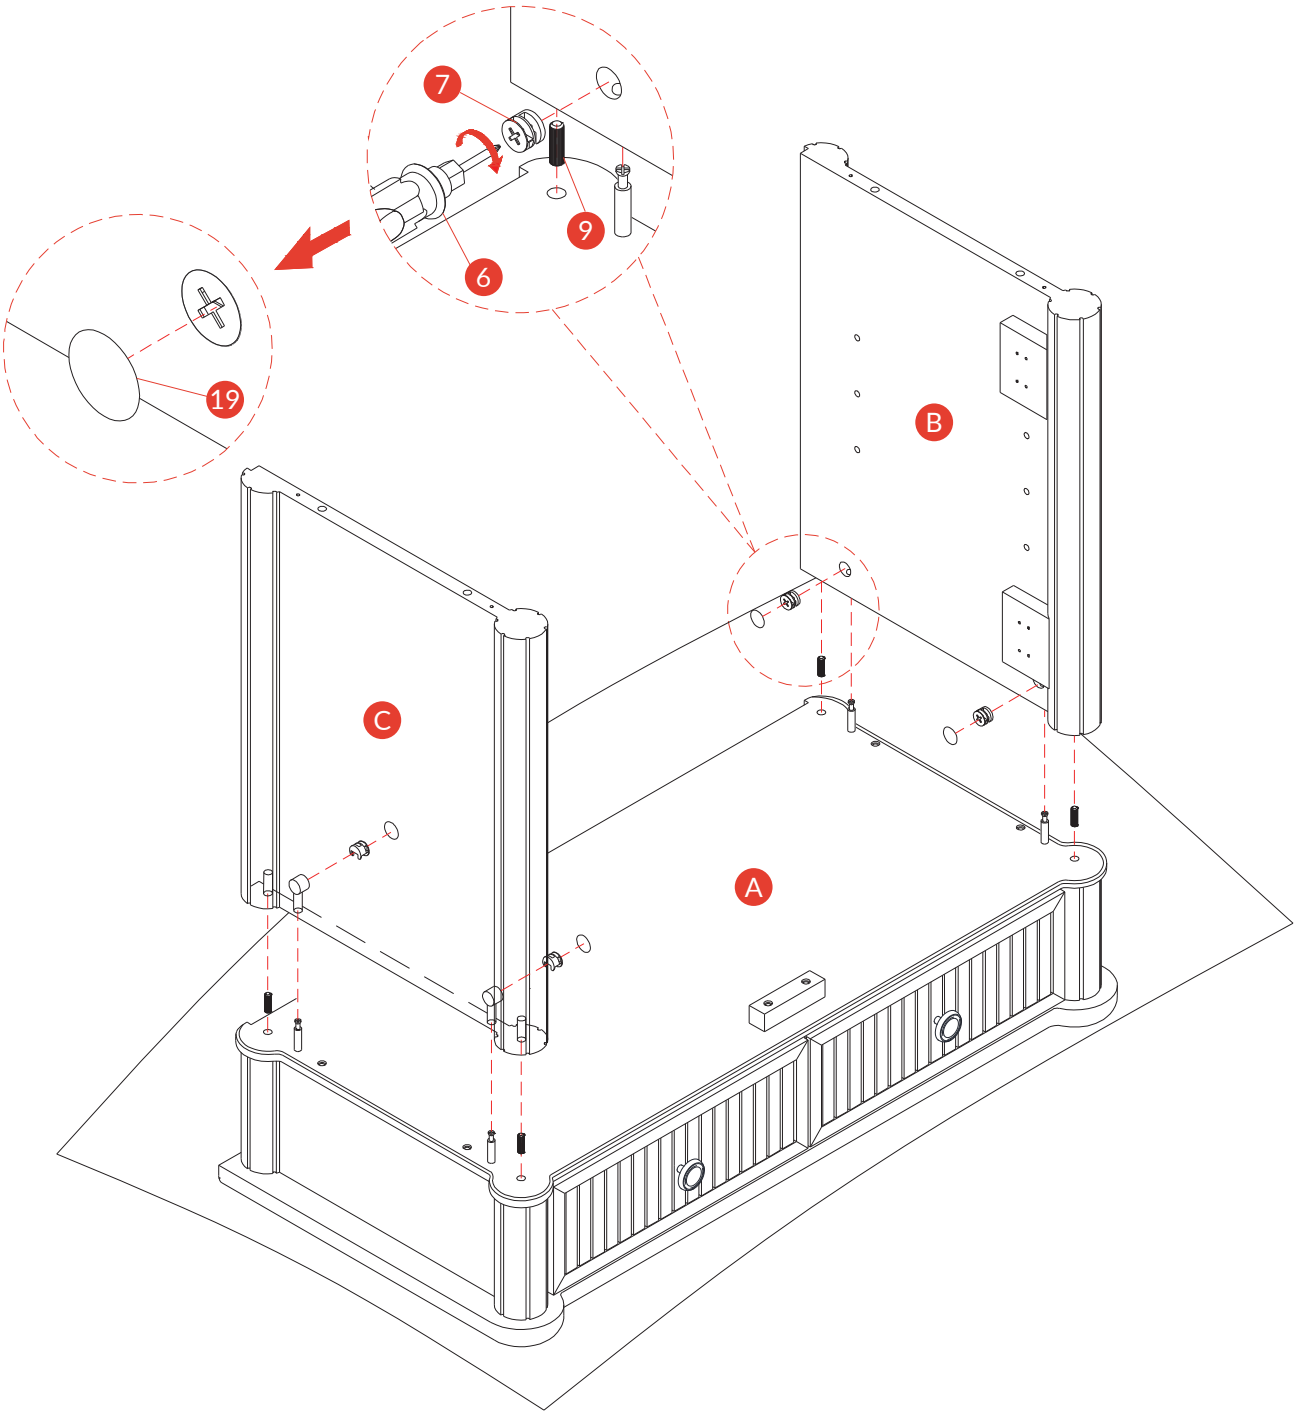

Step 03


Insert tree top (9) into the corresponding holes on side panels (B/C),then cover with bottom panel (D). Pass straight screws (18) through the bottom panel (D) into thecorresponding holes on side panels (B/C) and tighten with wrench (20).

9	x 4	Ø8x30mm
18	x 4	Ø6.3x40mm
20	x 1	M4

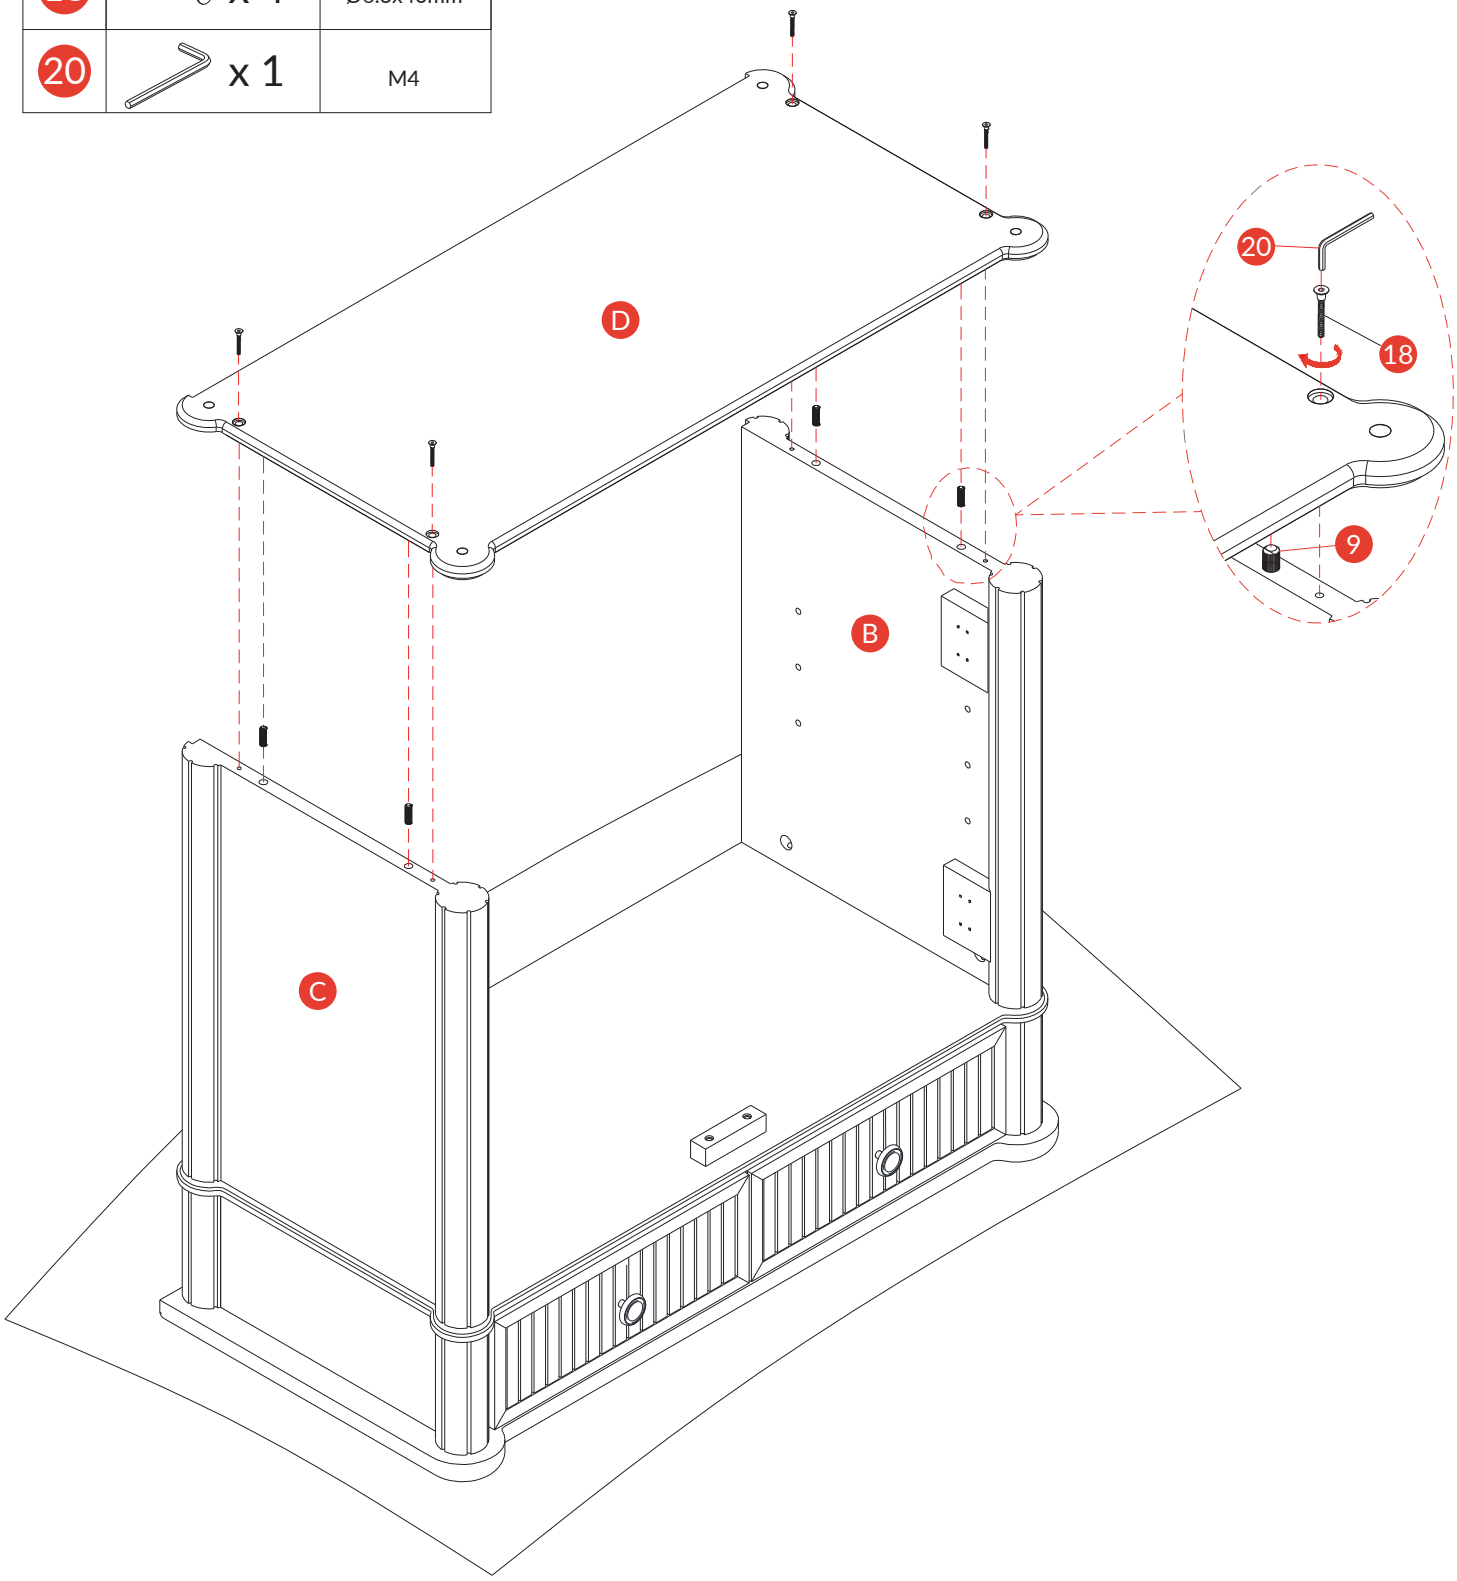

Step 04


Attach leg (G) to the corresponding hole on the base plate and tighten.

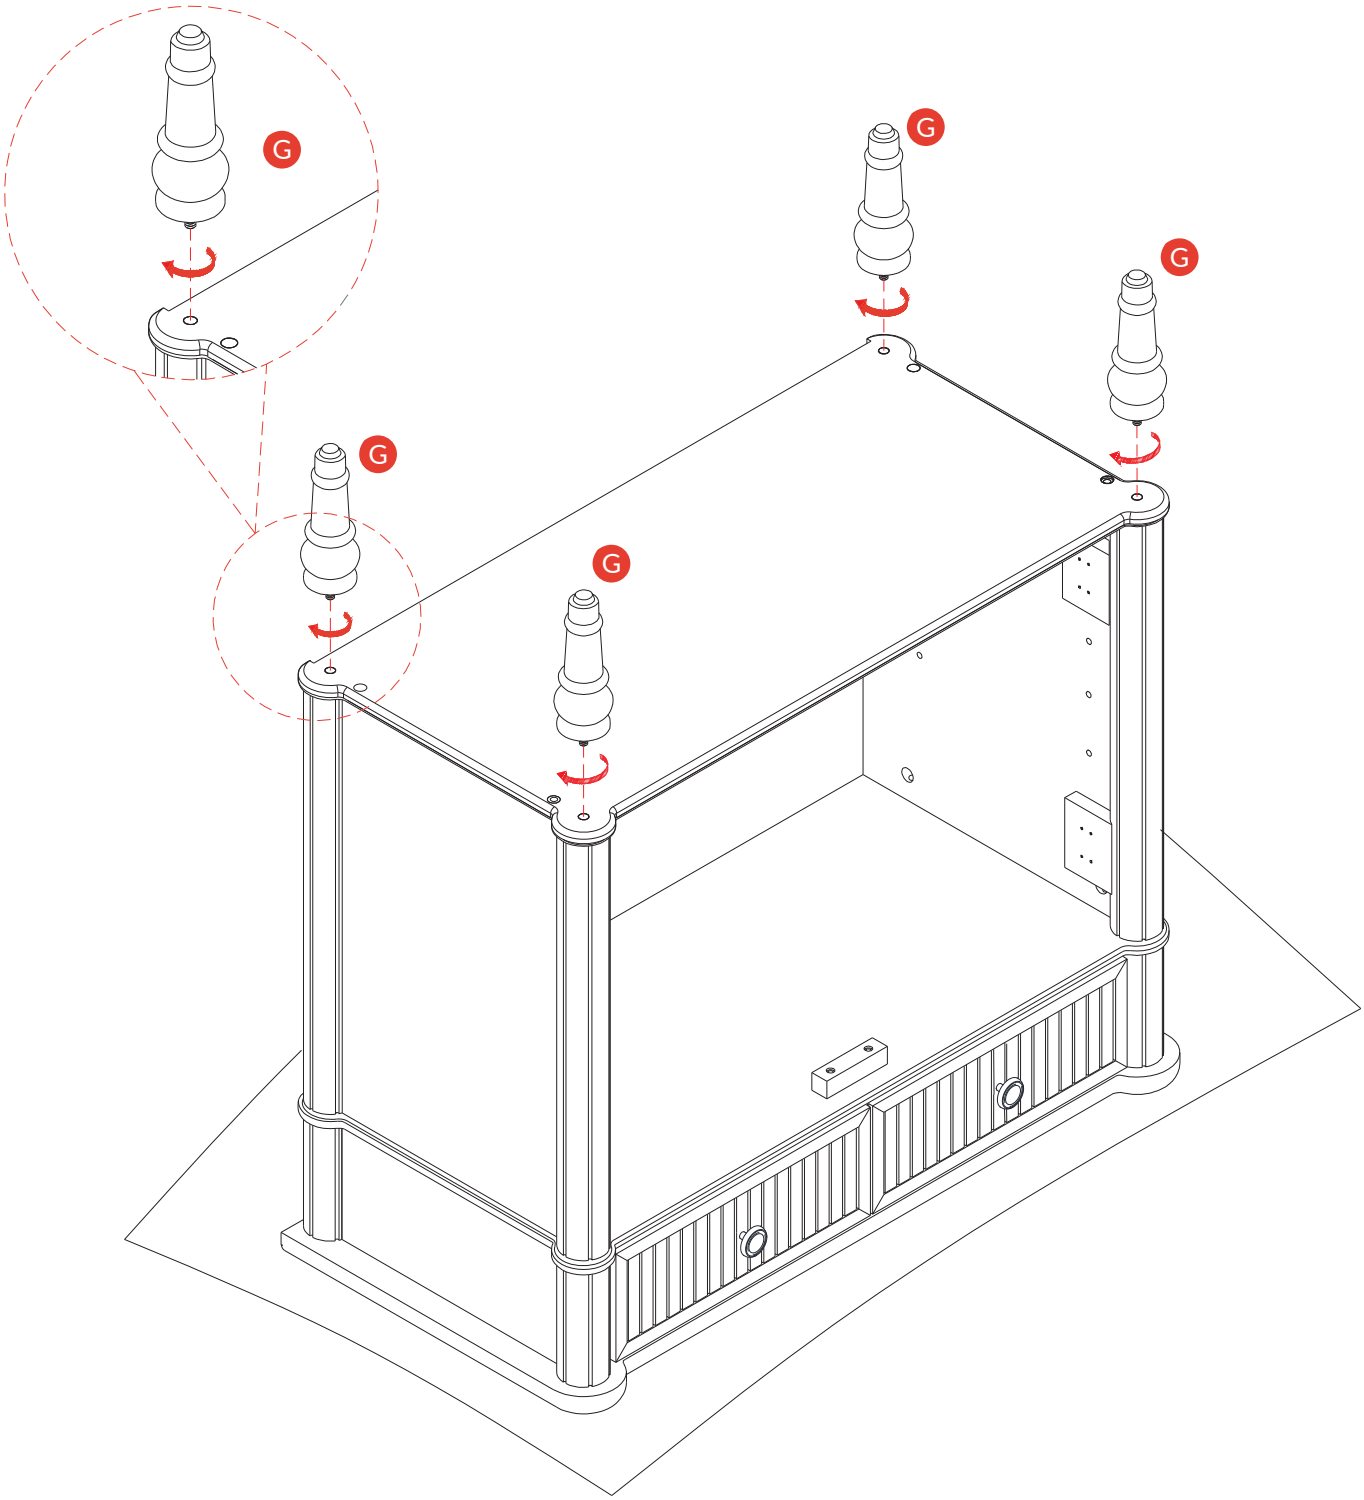


Step 05

Open the back panel (E) and place it into the back panel slot of the cabinet. Insert screw (13) through the corresponding hole in the back panel (E)and tighten it with screwdriver (6).

13	x 16	D4x16mm
6	x 1	Screwdriver

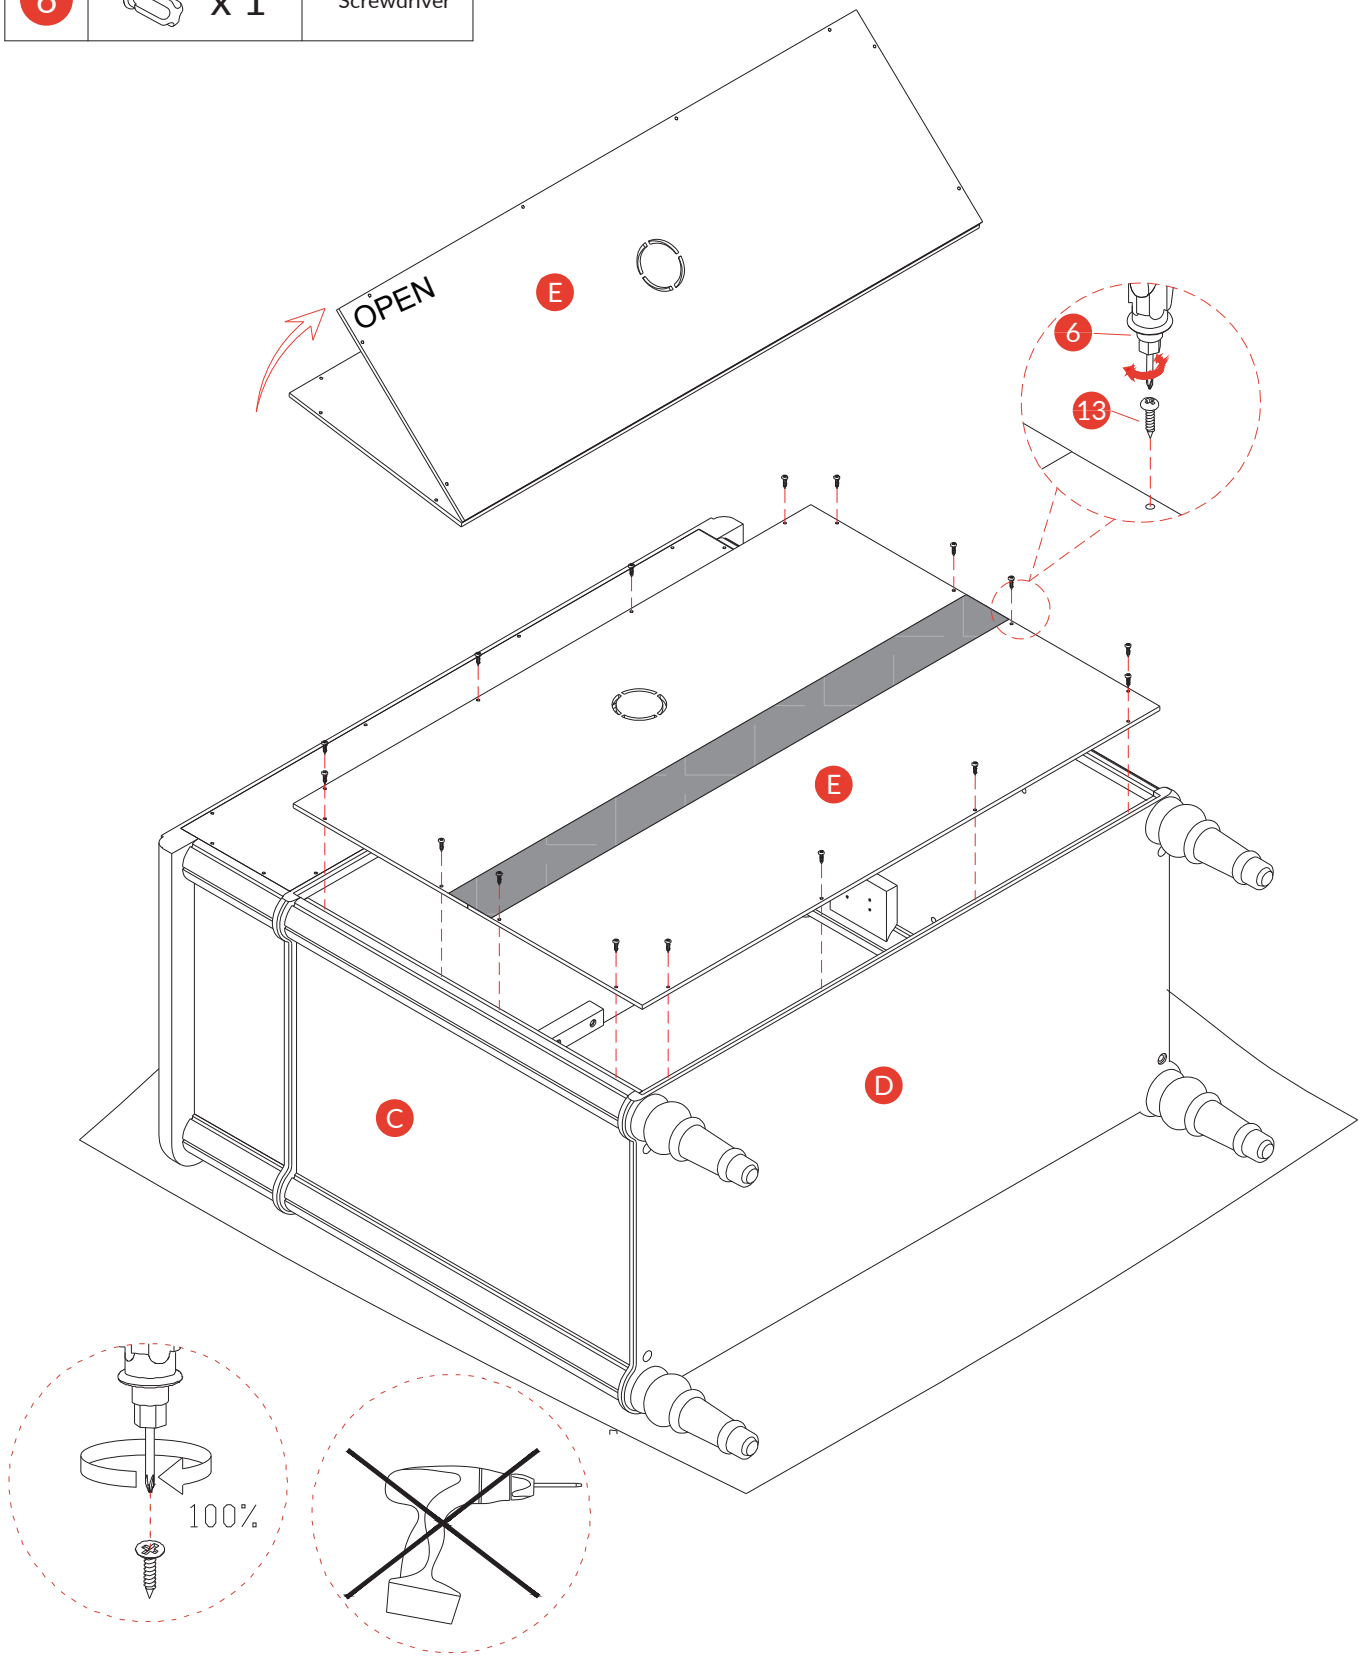

Step 06

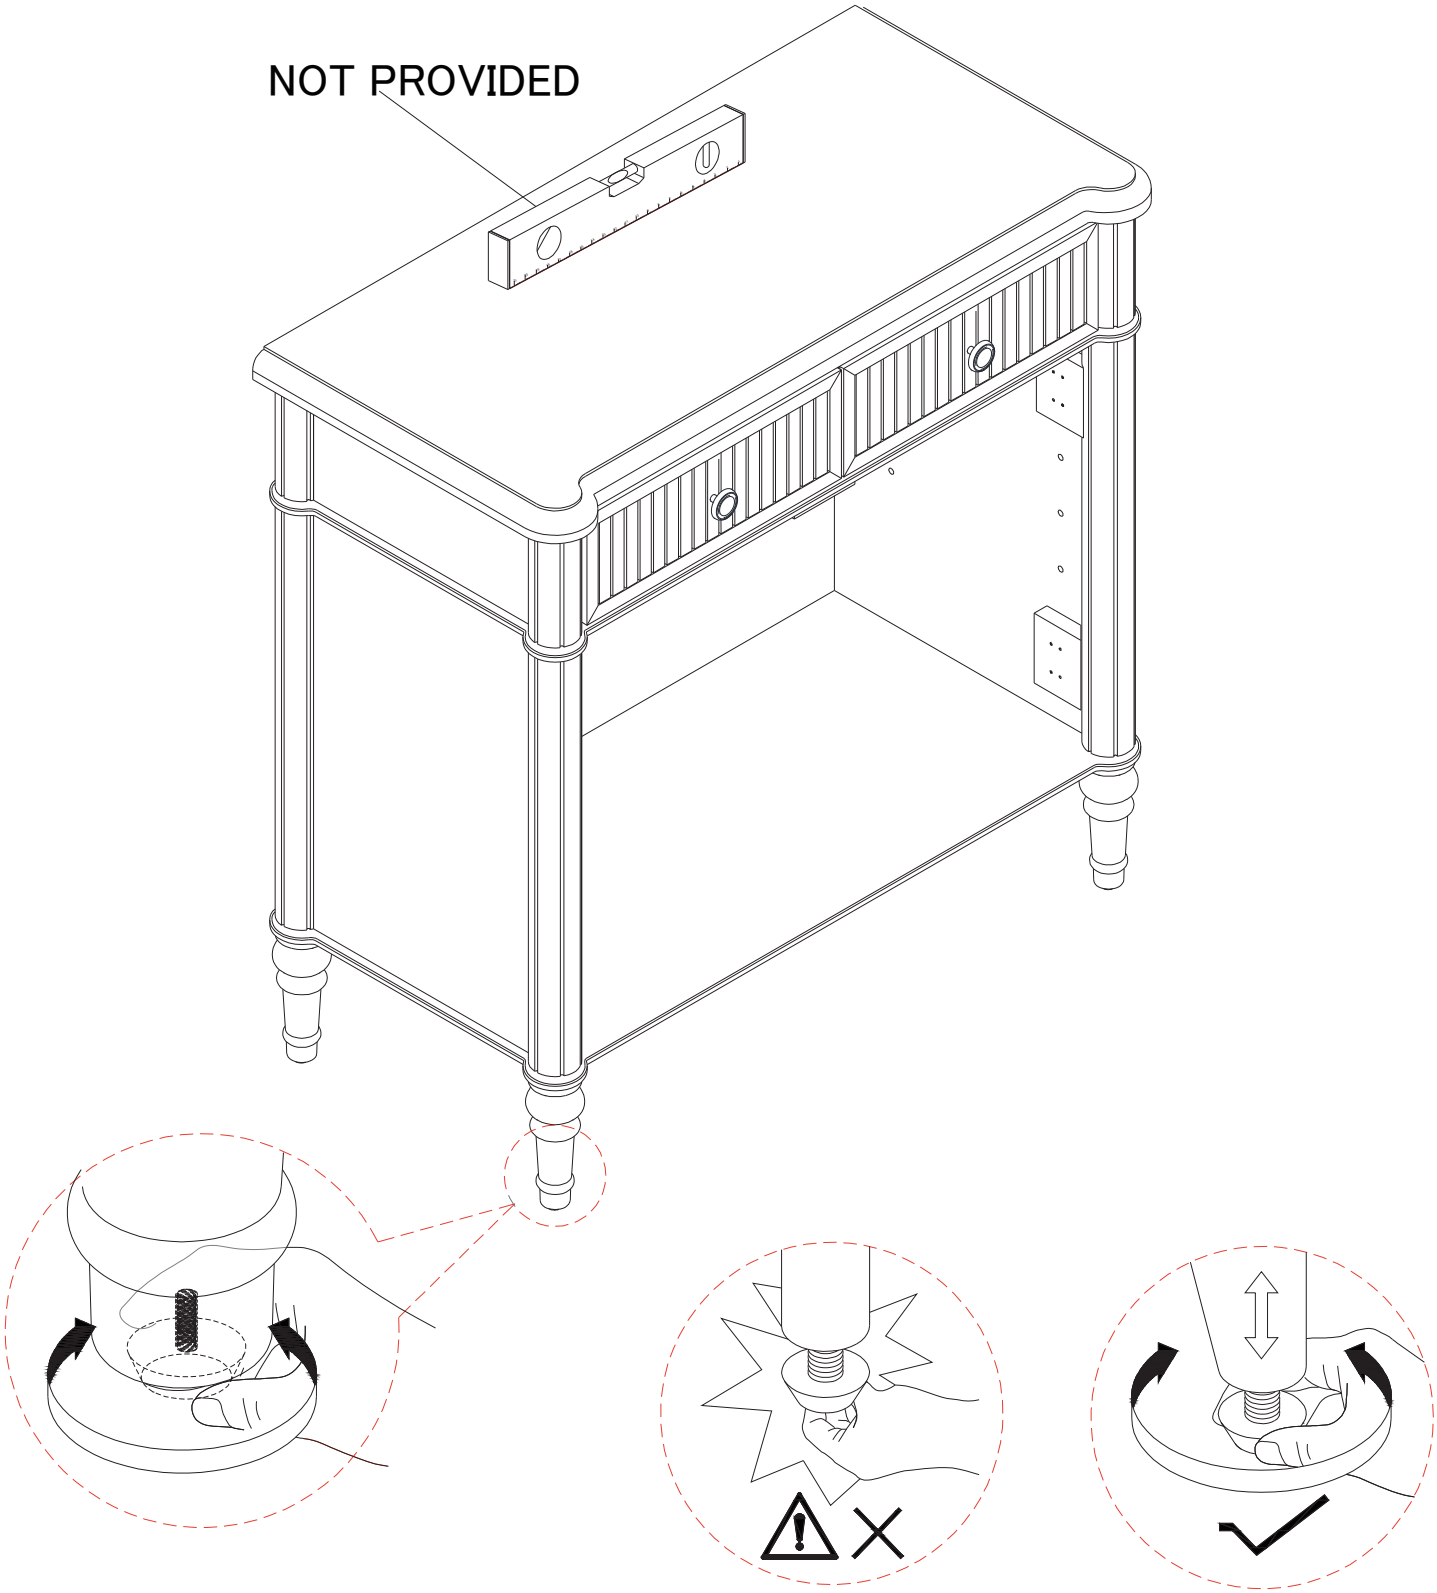



Note:
Before the next step, adjust the feet of the locker to keep it level.

Step 07

Nail shelf (15) into the corresponding holes on side panels (B/C) Place shelf (F) inside the cabinet and level it.

15		x 4	Layer board support

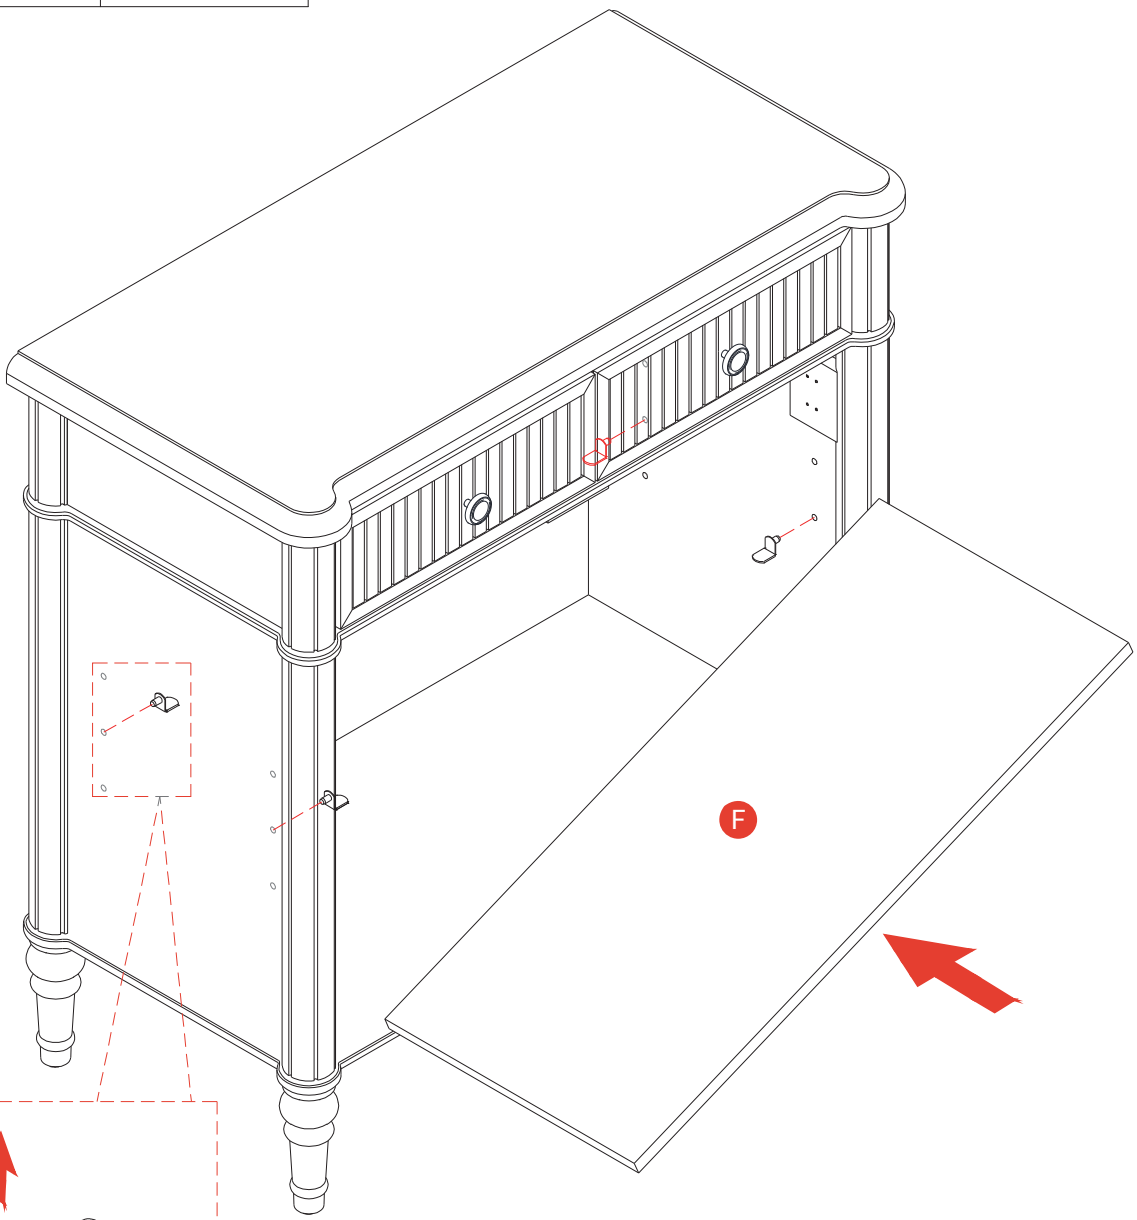


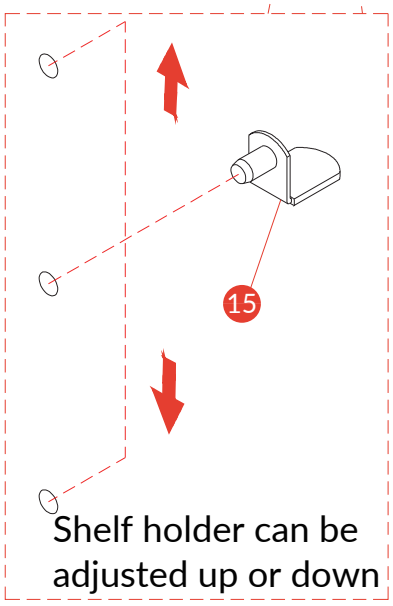

Step 08

Insert the door hinge (12) into the corresponding hole on door panel (H),and use screwdriver(6) to tighten screw (14) in the corresponding hole.Insert handle 11 through door panel H into the corresponding hole of handle 10, and tighten with screwdriver 6.


11	x 2	M4x20mm	14	x 8	D4x40mm	6	x 1	Screwdriver
12	x 4	Ø35nn	10	x 2	Hold dands			

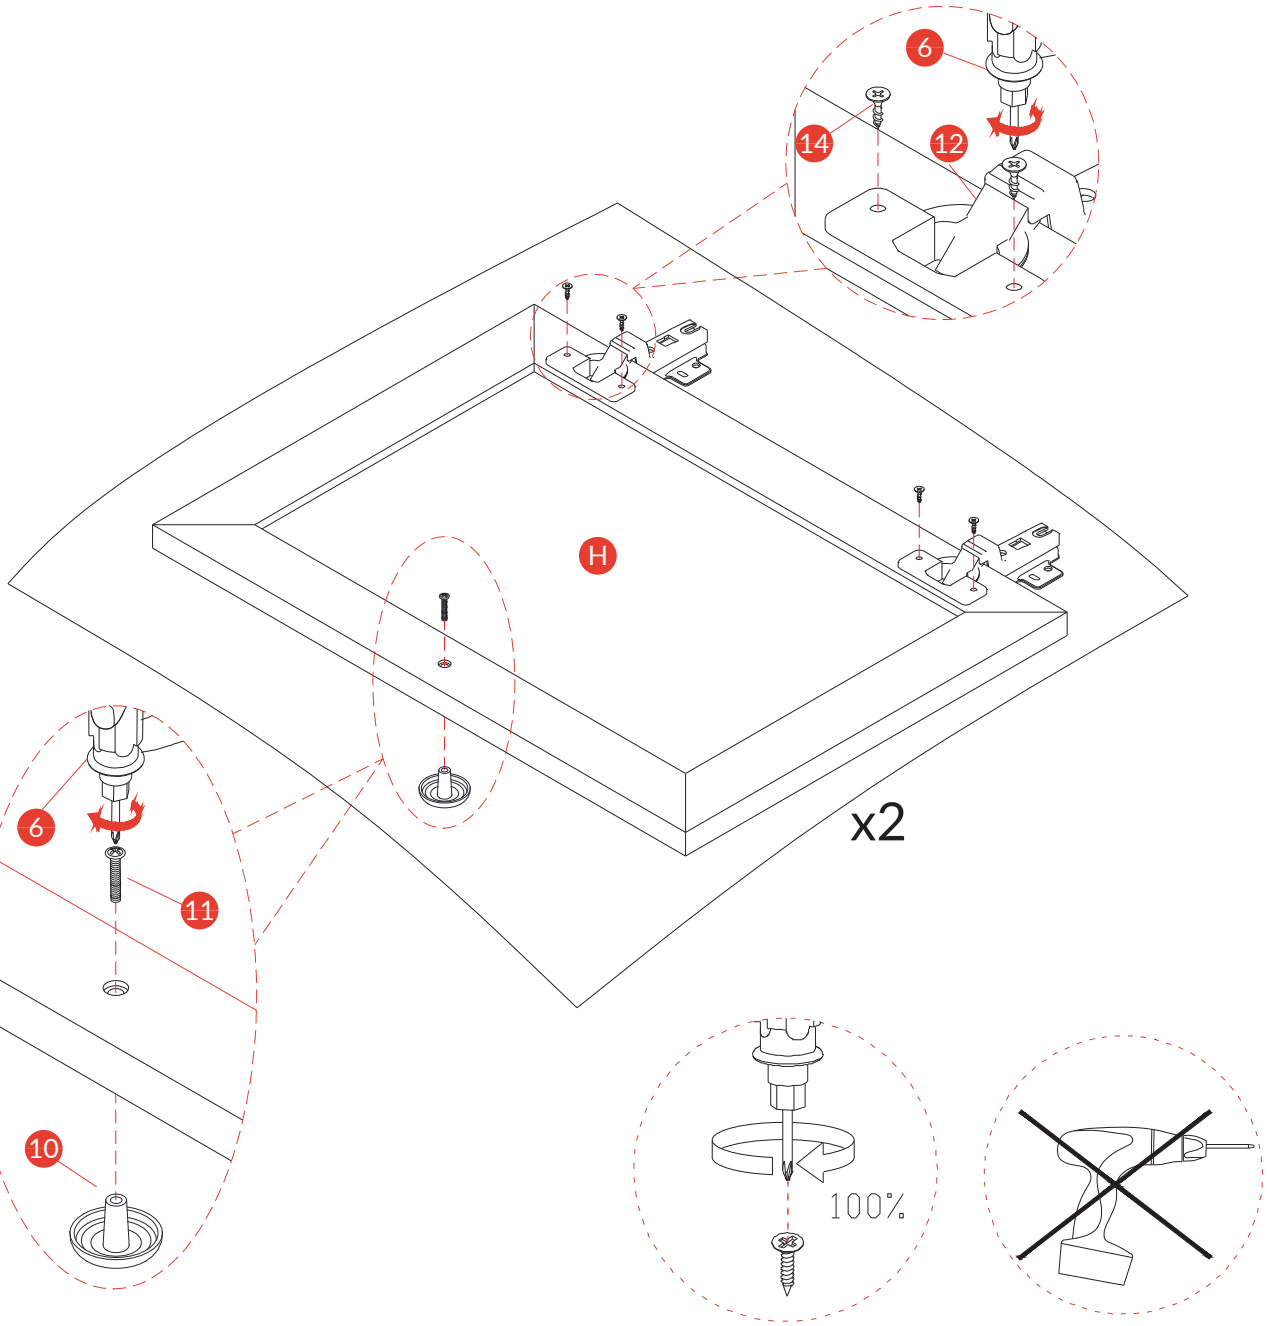

Step 09


Insert screw (14) through the door hinge and install it into the corresponding hole on side panel (B/C), then tighten it with screwdriver (6).

14	x 16	Dx16mm
6	x 1	Screwdriver

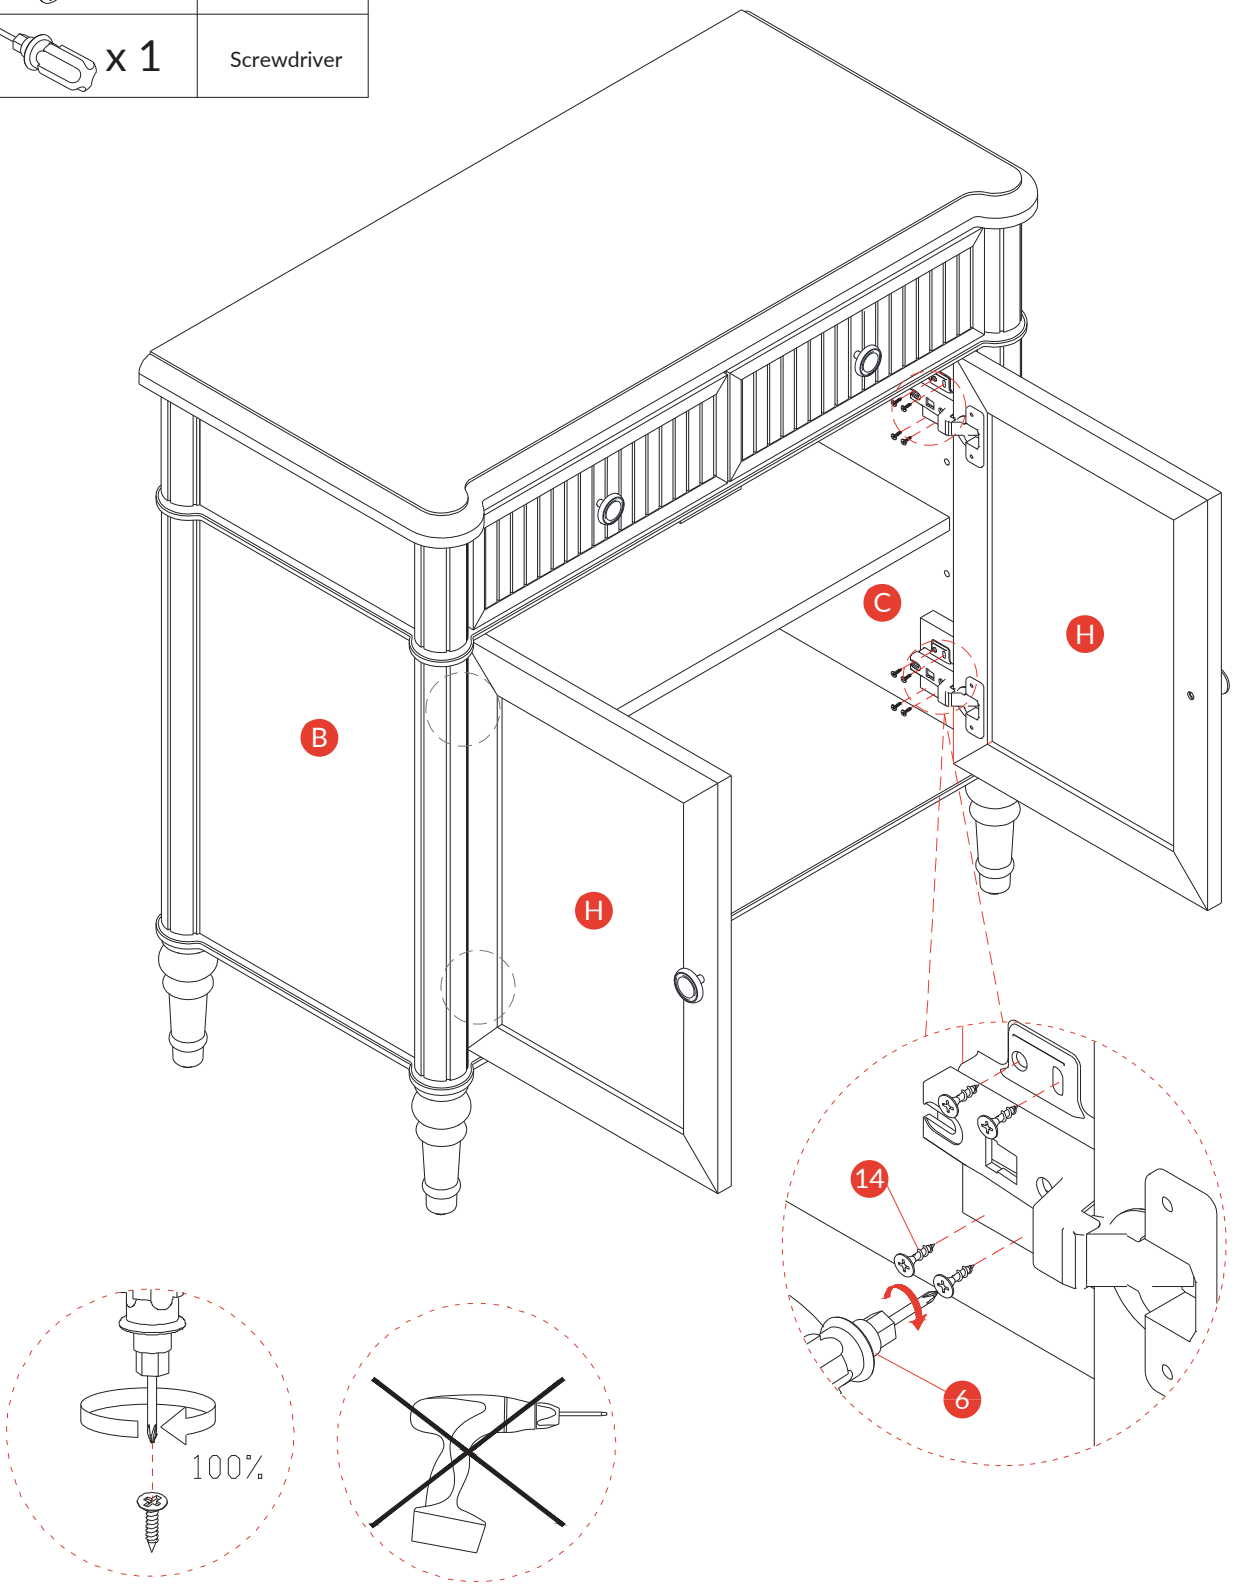


Door Hinge Adjustment Instructions


Concealed hinges are three-way adjustable.




Horizontal by screw adjustment!

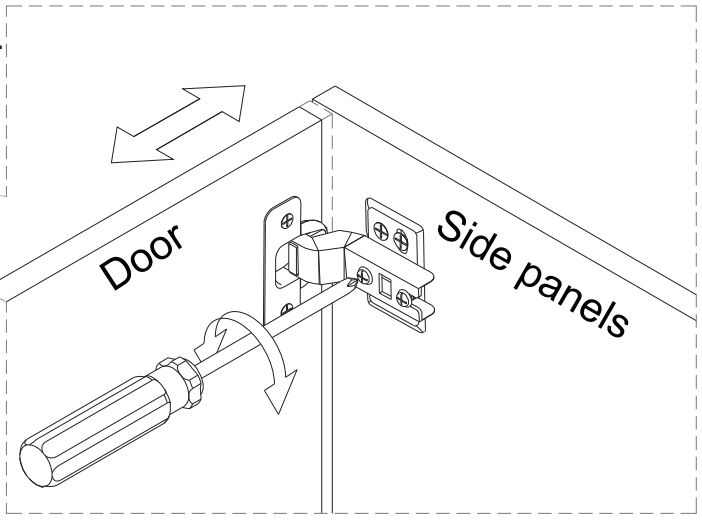


Concealed hinges are three-way adjustable.




In-and-out by loosening the hinge arm mounting screw or via cam adjustment!

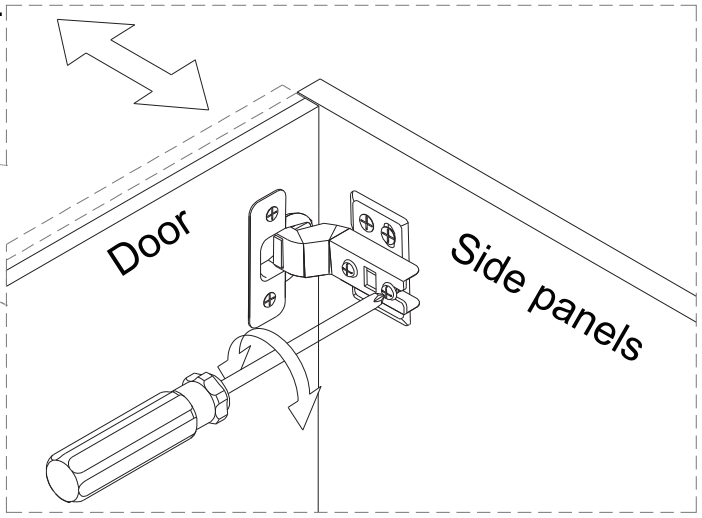

Concealed hinges are three-way adjustable.




Vertical via slots in the mounting plate or via cam adjustment!

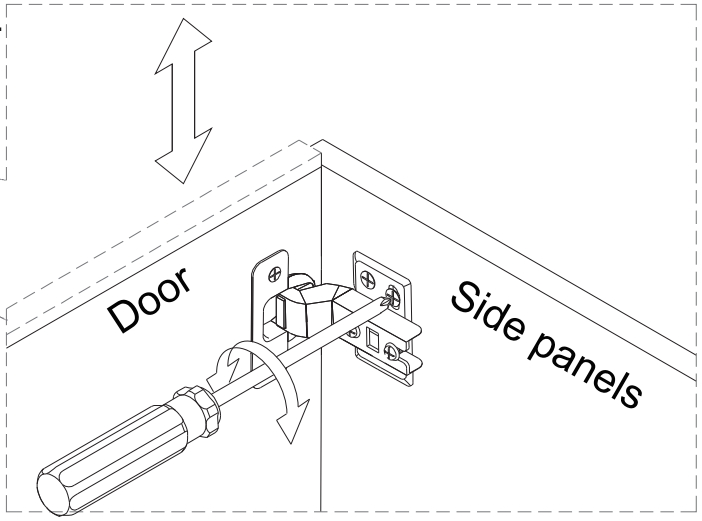

Step 10

Pass screw (2) through the anti-tilt part (1) and attach it to the corresponding position on the cabinet panel, then tighten it with screwdriver (6).


2	x 4	D4x20mm
1	x 2	Anti-tip componeng
6	x 1	Screwdriver

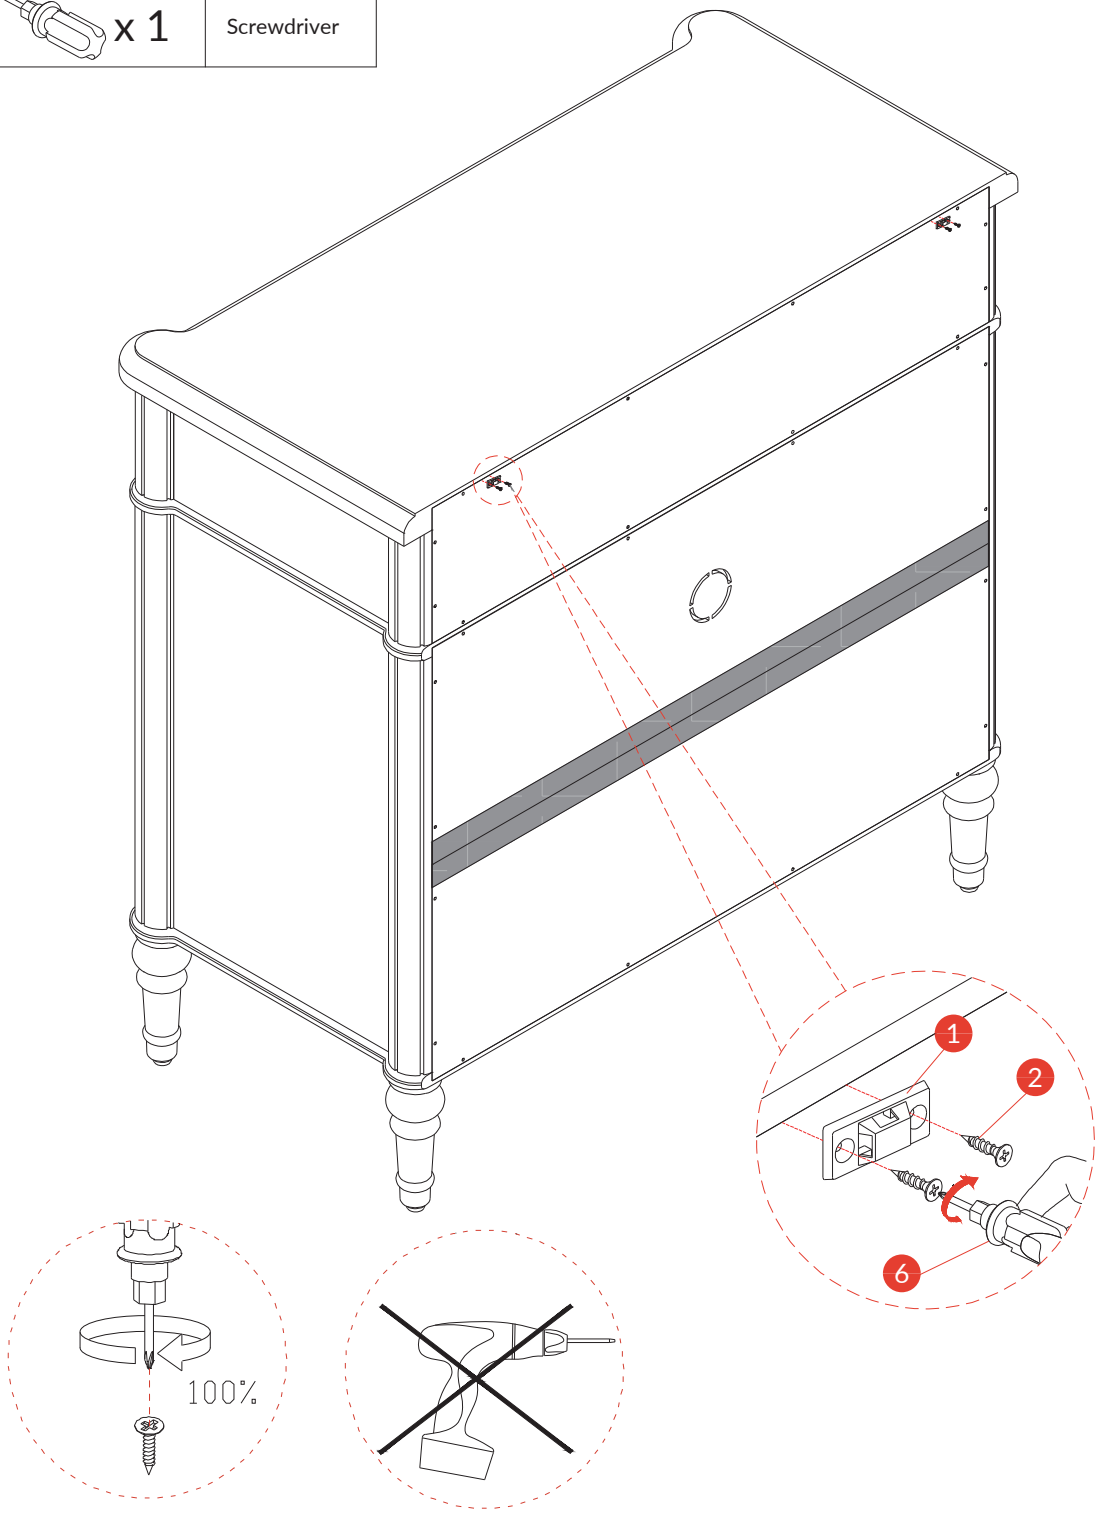


Step 11


Install Anti-tip device (1) to the wall in this step.

5	x 4	D4x40mm	1	x 2	Anti-tip componeng
4	x 4	L=30mm	6	x 1	Screwdriver

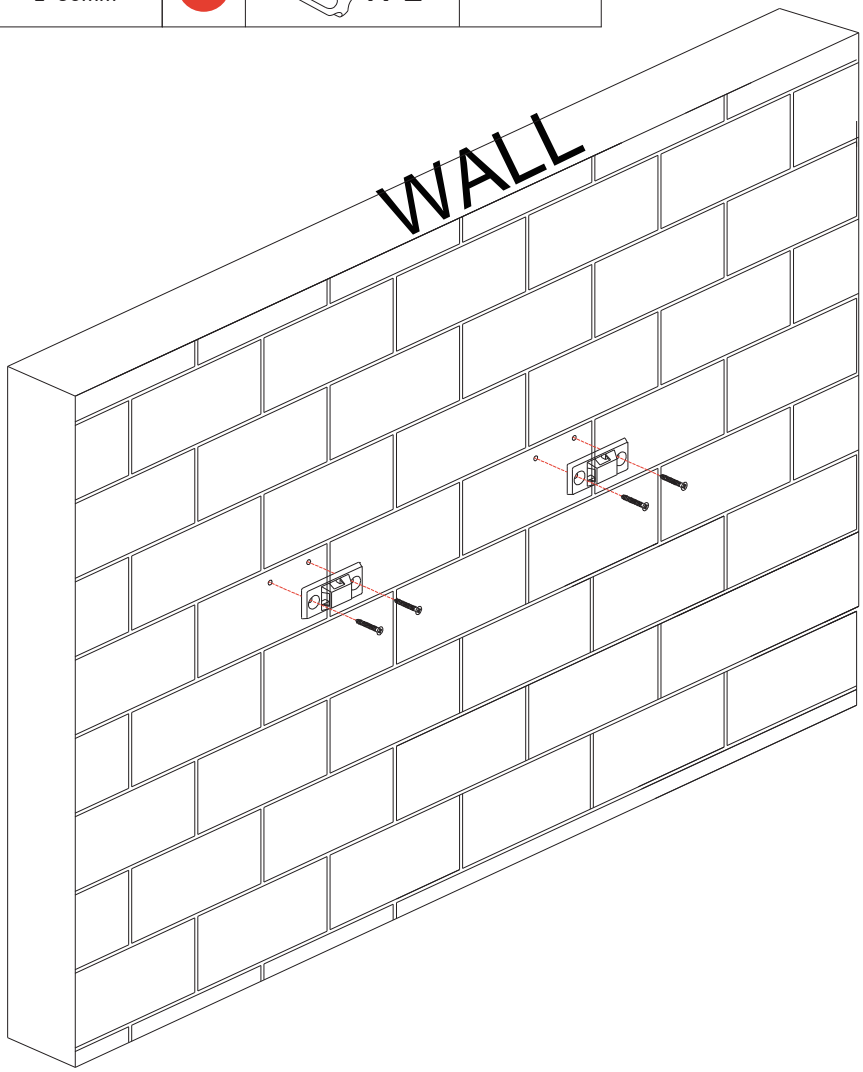


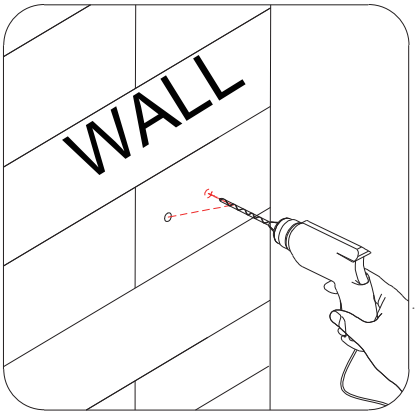

1.Drill a hole in the wall with an electric drill.

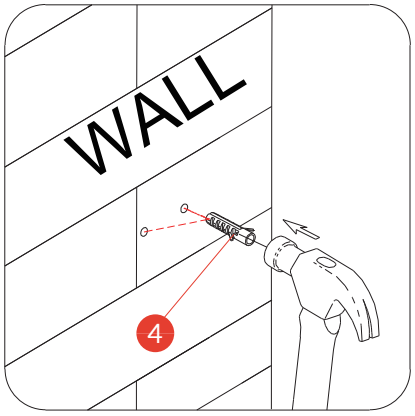

2.Tap the plastic wall anchor into the hole with a hammer.

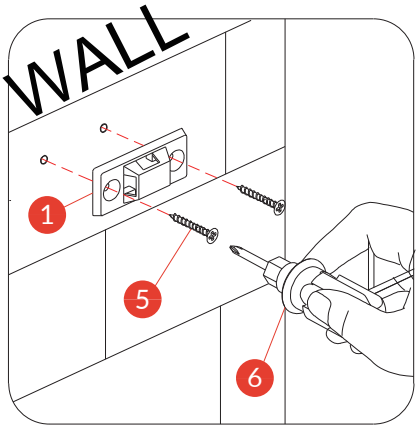

3.Secure the Anti-tip device 1 to the wall with screws 5.

Step 12

WARNING

Children have died from furniture tipover.
To reduce the risk of furniture tipover:
-ALWAYS install Anti-tip device provided.
-For use with televisions weighing 35 lb or less.Use with heavier televisions may result in instability causing tip-over resulting in death or serious injury.
-NEVER allow children to stand, climb or hang on drawers, doors, or shelves.
-NEVER open more than one drawer at a time.
-Place heaviest items in the lowest drawers.



3	x 2	Hardware pack

