DREAMSIDEA

INSTRUCTION MANUAL



NO:14963


DREAMSIDEA

Tel.+1-562-510-9089

E-mail:support@dreamsidea.com

https://www.dreamsidea.com

EXPLODED VIEW

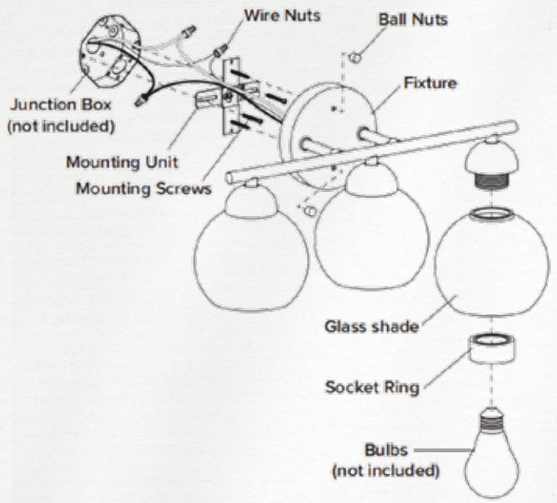

PARTS



Fixture | Glass shade | Mounting Unit



Ball Nuts | Mounting Screws | Wire nuts

ATTENTION

Please inspect the wires before installation, if the wireshows any cut or abrasion,or has exposed copper wires,


DO NOT use the fixture,it might be caused during transportation or defect product.

Before starting installation of the fixture, please remove the previous fixture (if any).Disconnect the power by turning off the electric break for your property(Please ask for professionalhelp if reeded).

MAINTENANCE AND WARNING

- Verify the lamp model suits the environmentindoor/outdoor, IP rating) and check all accessories(body, screws, cord, manual).
- Only use with bulbs of the recommended type andwattage. Exceeding the maximum wattage maycause overheating or fire.
- Do not install the fixture if any part is damaged or missing.
- The fixture may become hot during use. Allow to cool before handling
- Clean dust accumulation in recessed lamps regularly(to prevent overheating), but only when powered off; never rinse with water.
- If the fixture includes a dimmer switch, ensure it is compatible with the fixture before installation.
- Do not modify the fixture in any way; tampering with electrical components can result in malfunction or risk of fire

TOOLS REQUIRED

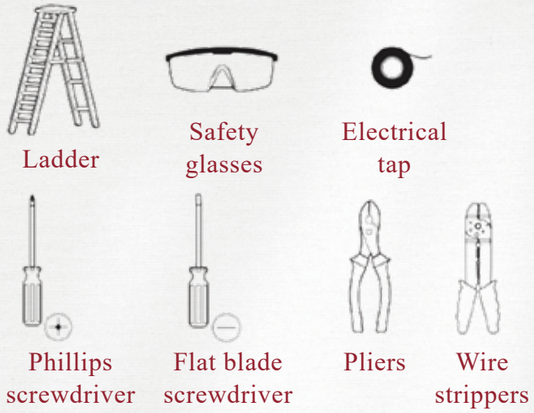


Ladder | Safety glasses | Electrical tap

Phillips screwdriver | Flat blade screwdriver | Pliers | Wire strippers


STEP 1


Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box (not included).

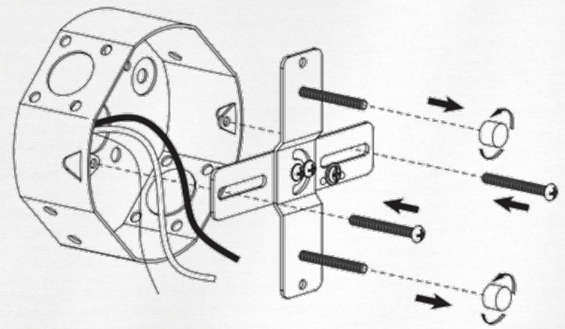

STEP 2


Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

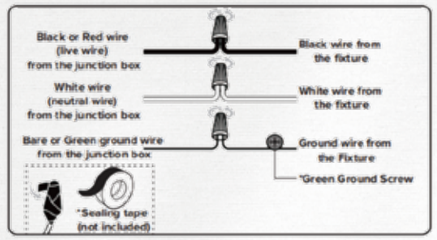

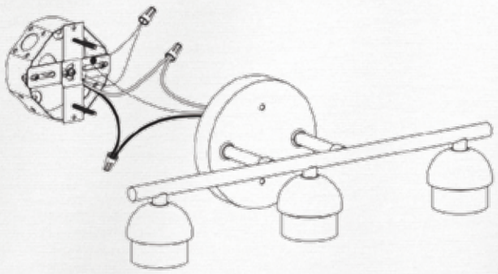


STEP 3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with ball nuts.

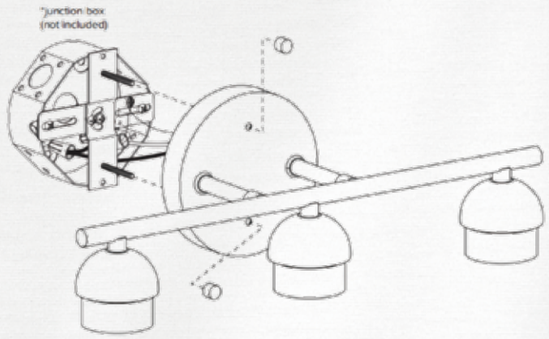


STEP 4

Remove the socket rings from the socket. Attache the glass shade onto fixture using socket rings.

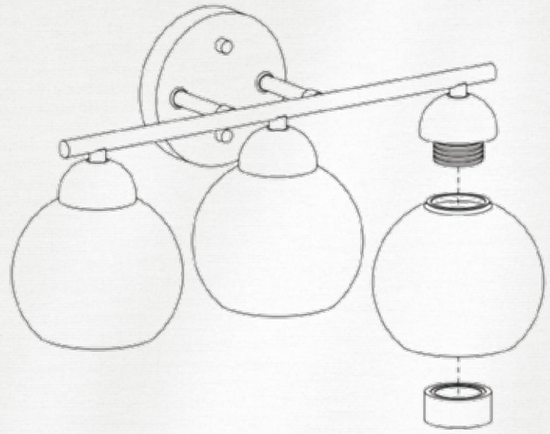

STEP 5

Install bulbs (not included).

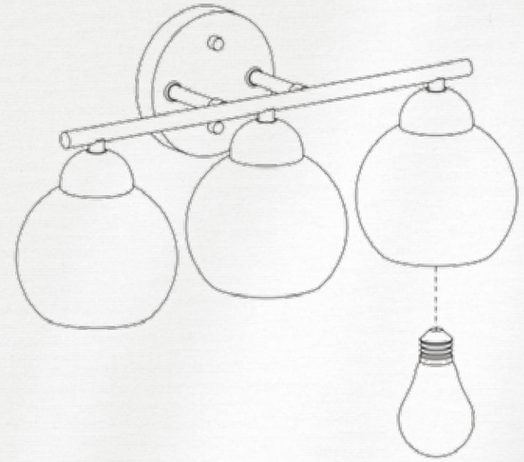

RRODUCT OVERVIEW



41963BK



41963BN



41963GB