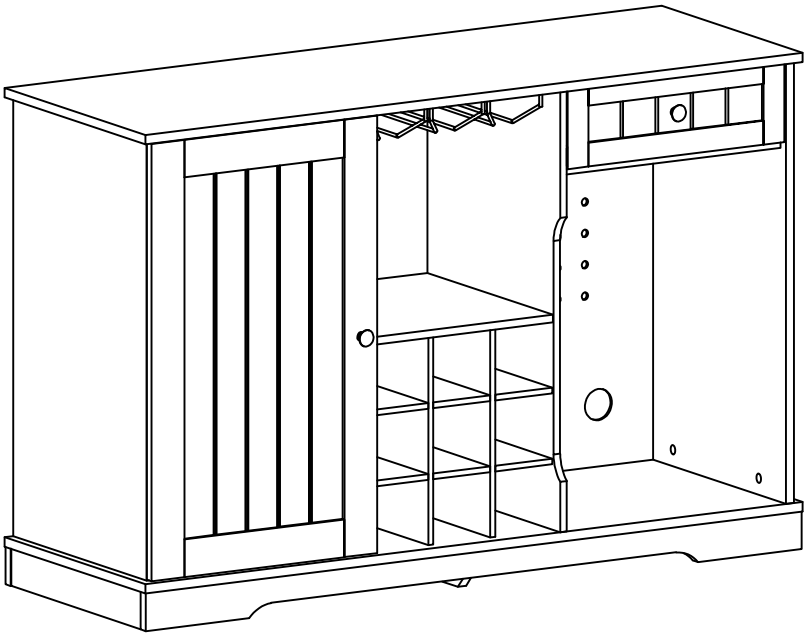
WINE CABINET

Assembly Instructions-Please keep for future reference





Important -Please read these instructions fully before starting assembly

⚠ Safety and Care Advice

Important - Please read these instructions fully before starting assembly

. Check you have all the components and tools listed on the following pages.

. Remove all fittings from the plastic bags and separate them into their groups.

. Keep children and animals away from the work area, small parts could choke if swallowed.


. Make sure you have enough space to layout the parts before starting.

. During assembly do not stand or put weight on the product, this could cause damage.

. Assemble the item as close to its final position (in the same room)as possible.

. Assemble on a soft level surface to avoid damaging the unit or your floor.

. Parts of the assembly will be easier with 2 people.



.To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

. Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

. From time to time check that there are no loose screws on this unit.

. This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

. Assemble all parts and bolts loosely during assembly,only once the product is complete should you fully tighten the bolts

. Regularly check and ensure That all bolts and fittings are tightend properly.

WARNING
In order to help prevent overturning - please follow these instructions

To help prevent product toppling over please follow the below steps:-


If anti-tip hardware accessories are supplied, fasten the unit to the wall.
Do not allow children to climb or hang on the furniture
Do not open more than one drawer at a time
Do not place heavy items in the top drawers
Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose

This product is supplied with anti-tip hardware; please install it.


Components - Fittings


Please check you have all the panels listed below


Note:The quantitie below are the correcet amount to complete the assembly. In some cases more fittings may be supplied than are required.


A	x47
	
M6X33mm	


B	x47
	
ø12X10mm	


C	x16
	
ø6X20mm	


D	x2
	
ø35	

E	x1
	
300mm	

F	x4
	
M3.5*35mm	

G	x2
	
M4*30mm	

H	x10
	
M3.5*12mm	


I	x42
	
M3.5*14mm	


J	x1
	
M4*18mm	


K	x1
	
M4*10mm	


L	x2
	


M	x14
	
ø14mm	

N	x1
	
325*340*55mm	

O	x4
	

P	x22
	


Q	x2
	
M7*27mm	

R	2
	
16mm	

S	x4
	

T	x24
	
ø20mm	

U	x1
	

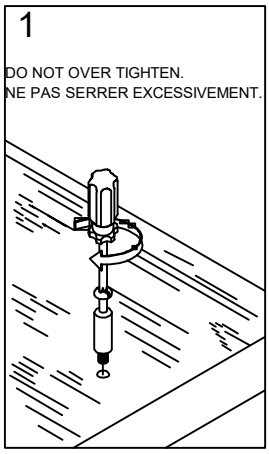
V	x1
	

W	x2
	

Using Camlocks

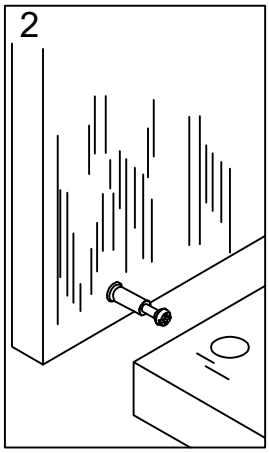
Step 1

Connect the camlock
as diected in the assembly
Instructlons using a
scewdriver.



Step 2

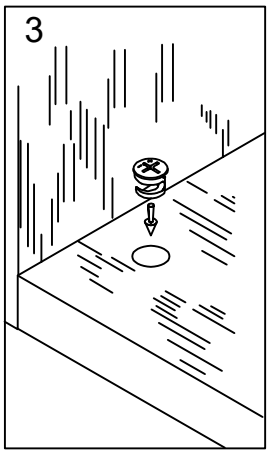
Push the male camlock
Into the entry hole.



Step 3

Insert the female camlock as
shown In the instruction.

Note: ensure that the arrow
on the top of the camlock
points towards he entry hole
for the male camlock.

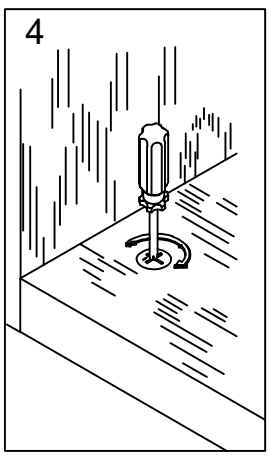


Step 4

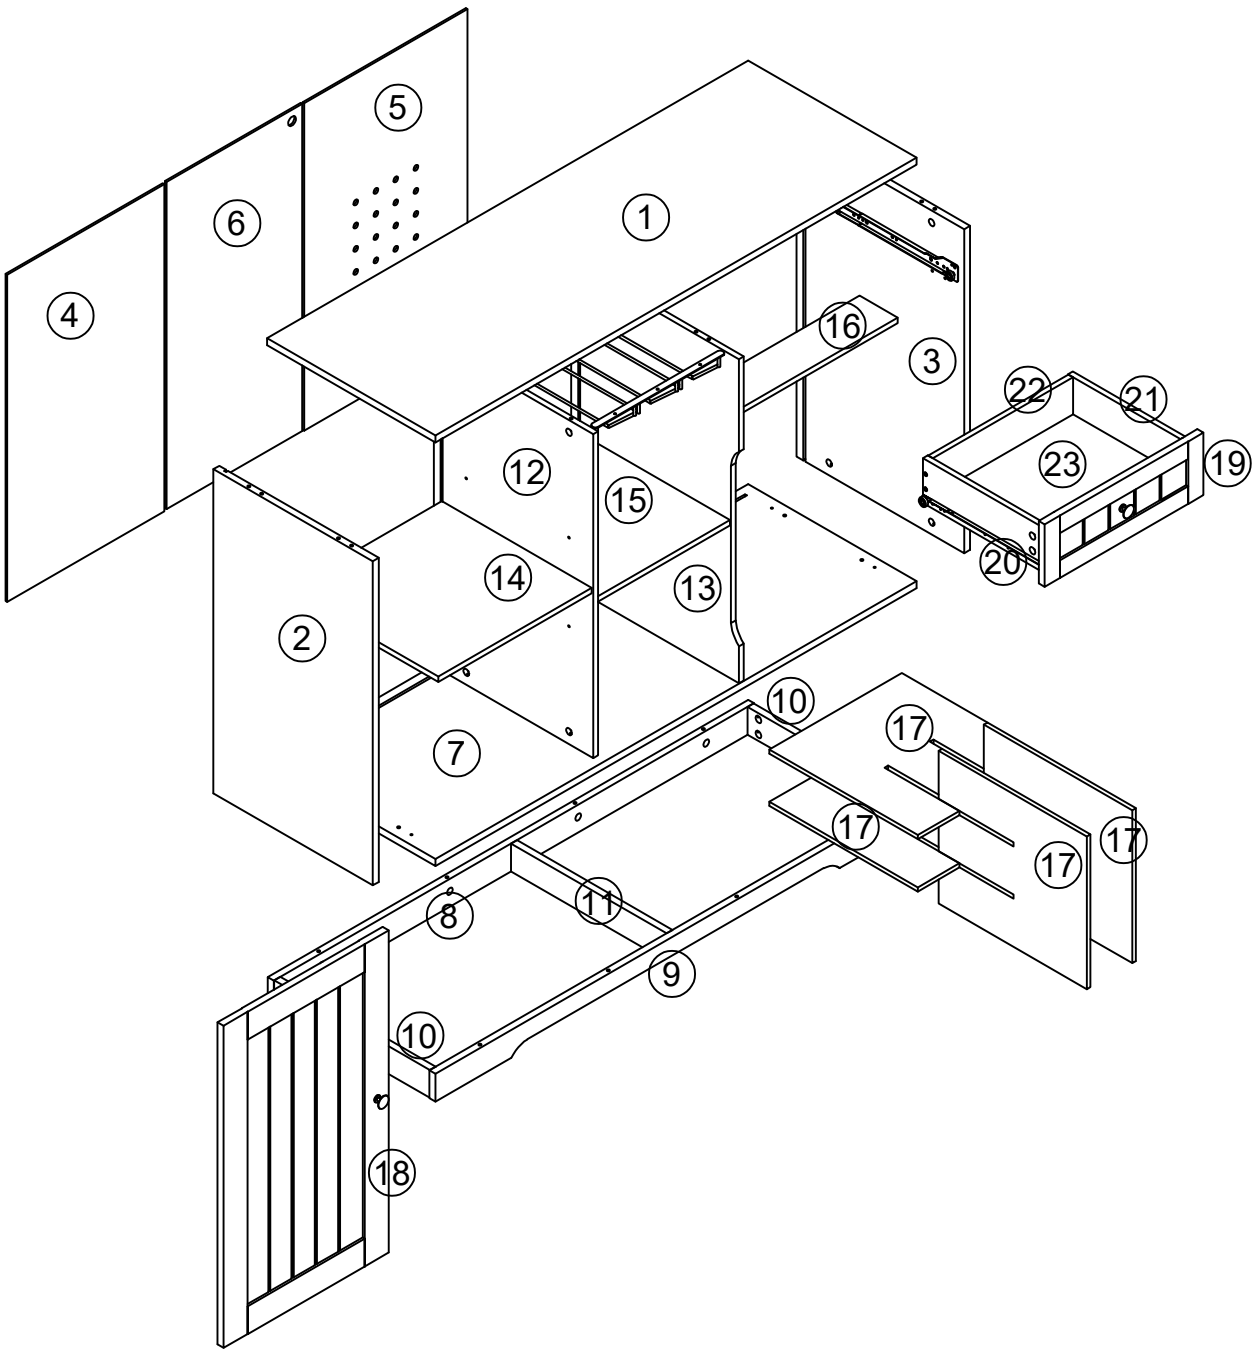
Turn the female camlock
clockwlse wlth a
screwdriver.

You should feel a cllck
when the camlock is
locked in place.

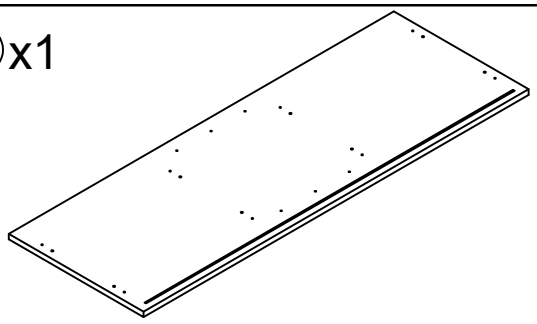
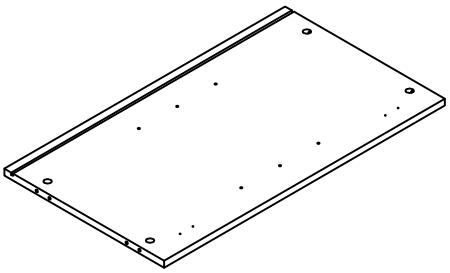
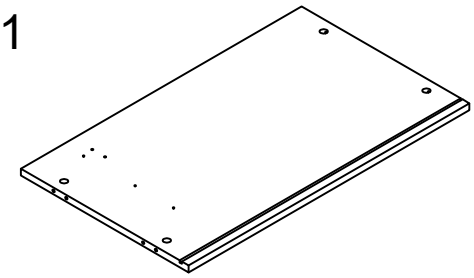
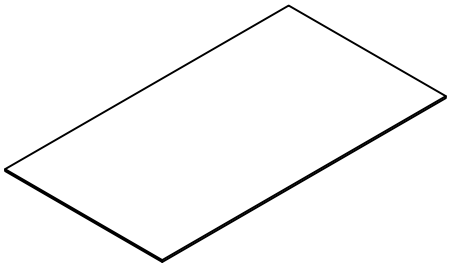
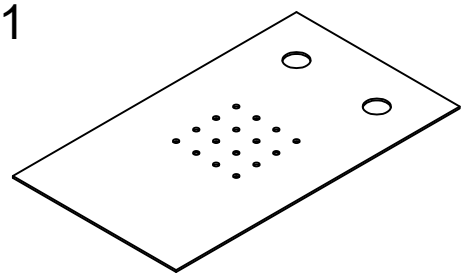
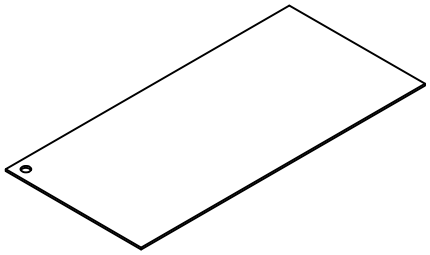
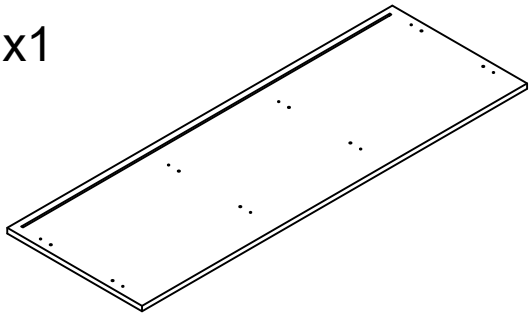
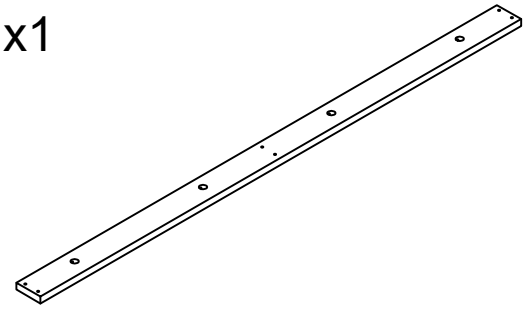
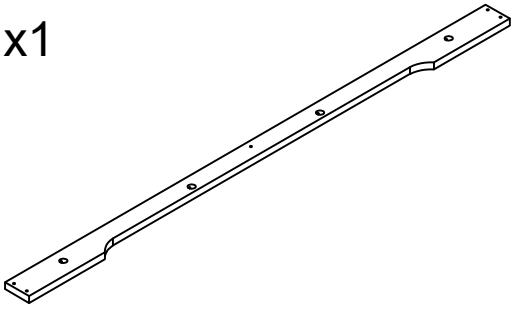


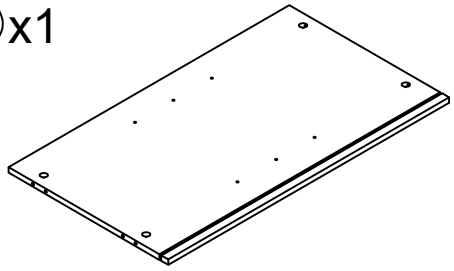
The jolnt Is now secure.



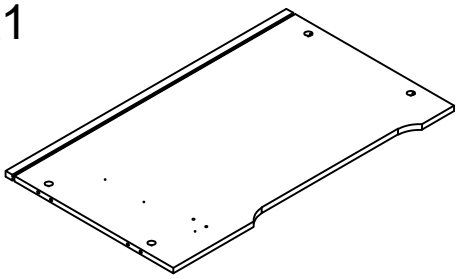




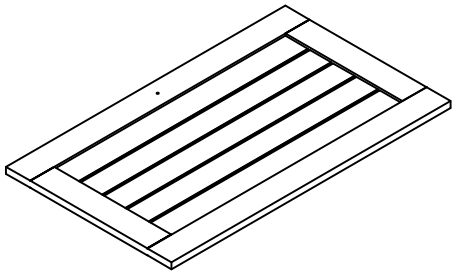





Parts list



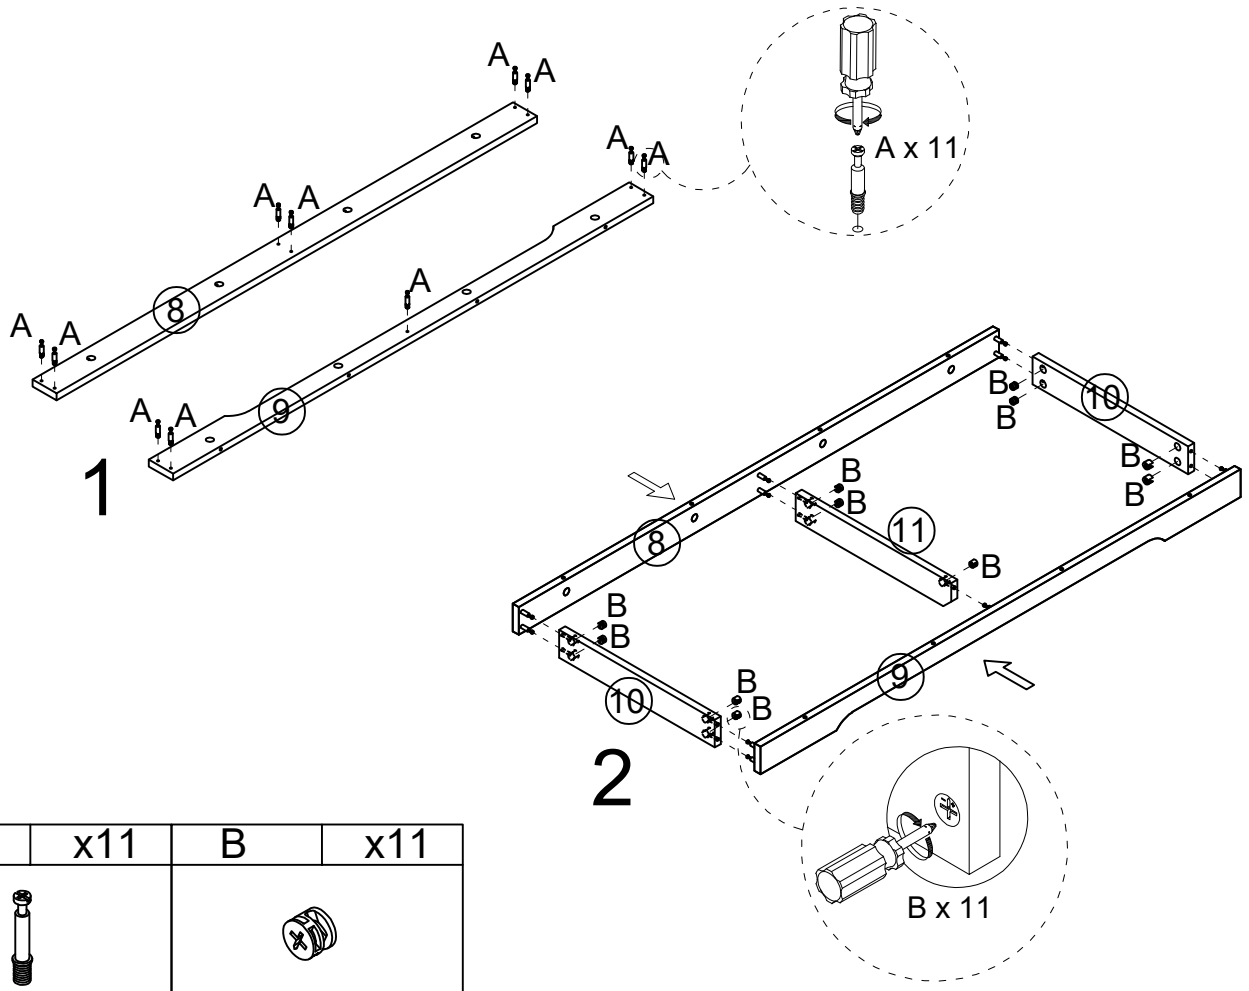
N728P511478

① x1 	② x1 
③ x1 	④ x1 
⑤ x1 	⑥ x1 
⑦ x1 	⑧ x1 
⑨ x1 	⑩ x2 
⑪ x1 	⑫ x1 

N728P511478

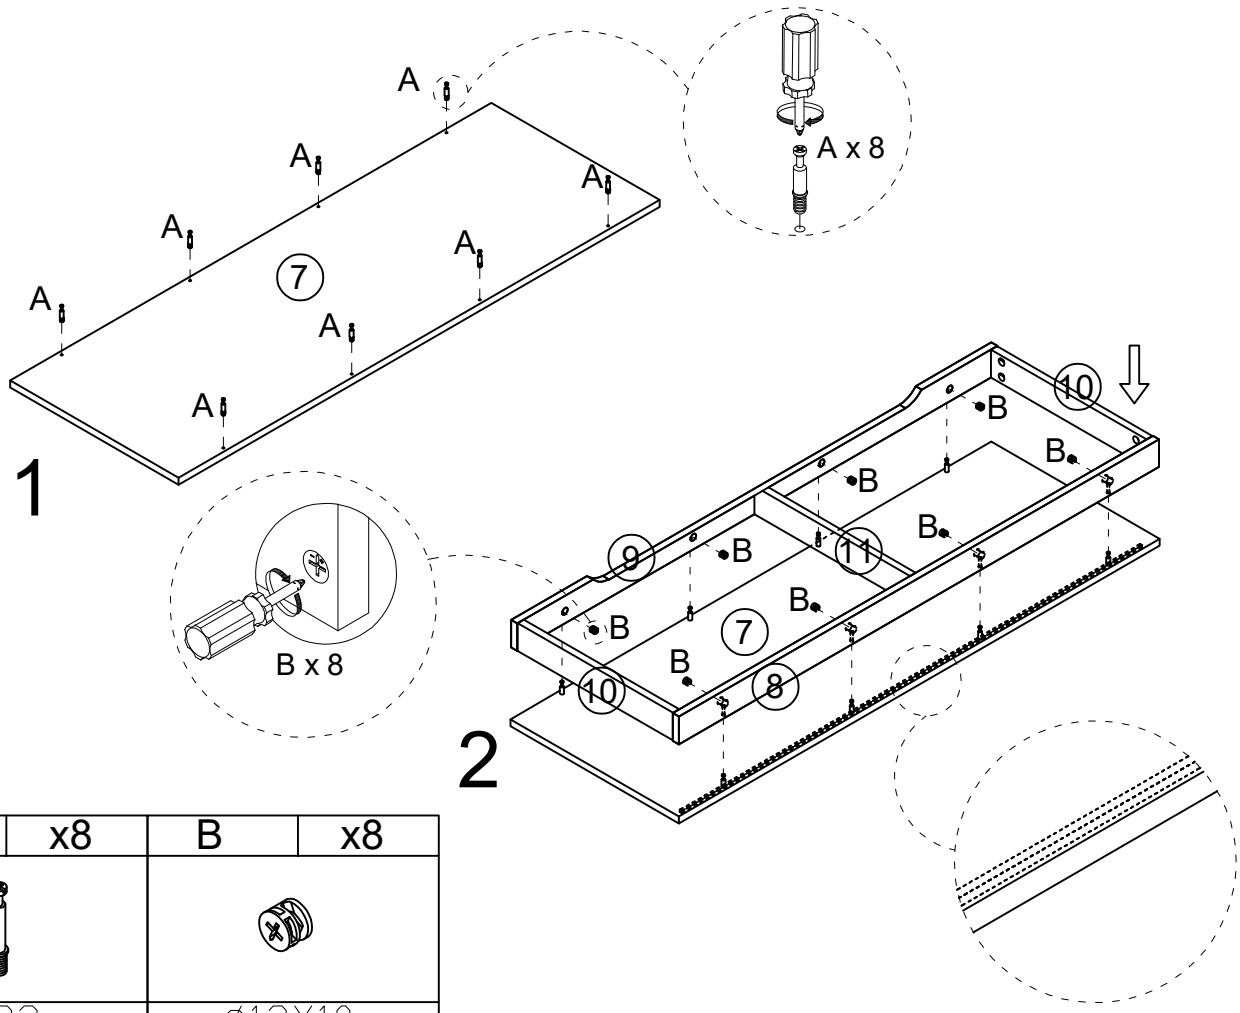
⑬x1 	⑭x1 
⑮x1 	⑯x1 
⑰x4 	⑱x1 
⑲x1 	⑳x1 
㉑x1 	㉒x1 
㉓x1 	

1



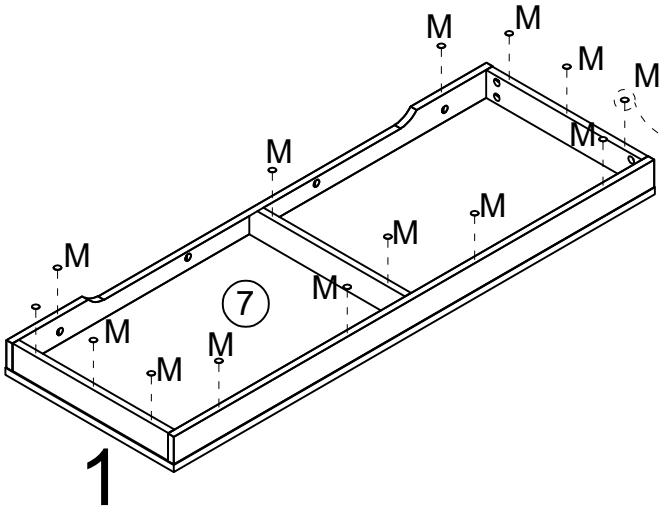
A	x11	B	x11
M6X33mm		Ø12X10mm	

2



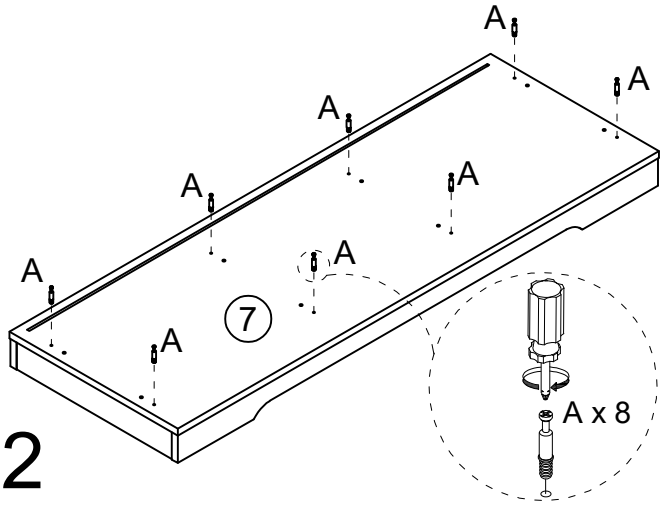
A	x8	B	x8
M6X33mm		Ø12X10mm	

3



1

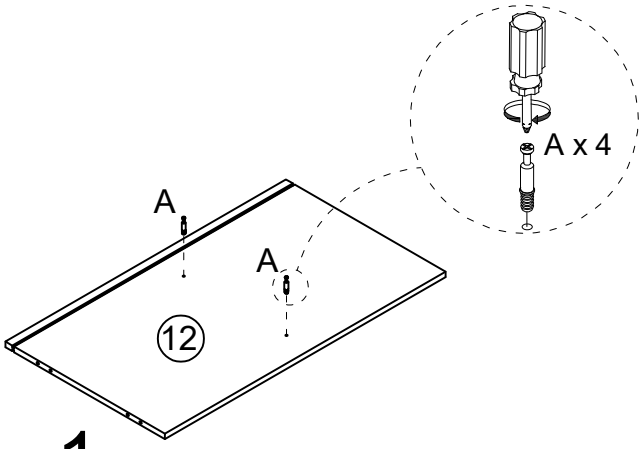




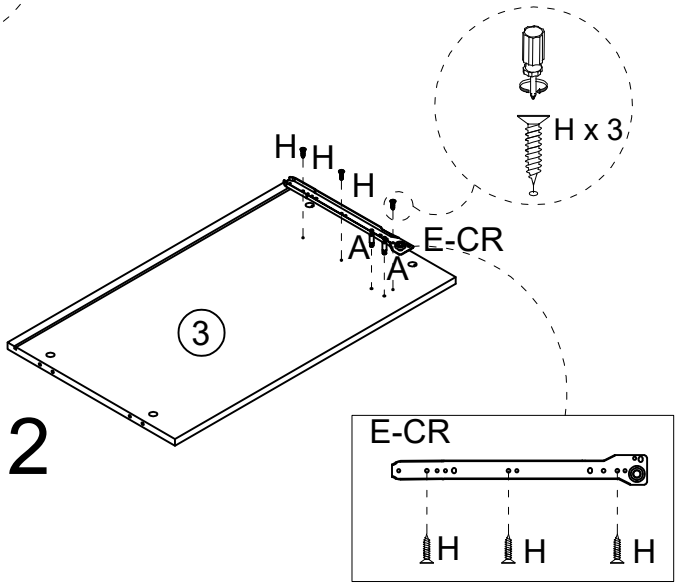
2

A	x8	M	x14
			
M6X33mm		Ø14mm	



4



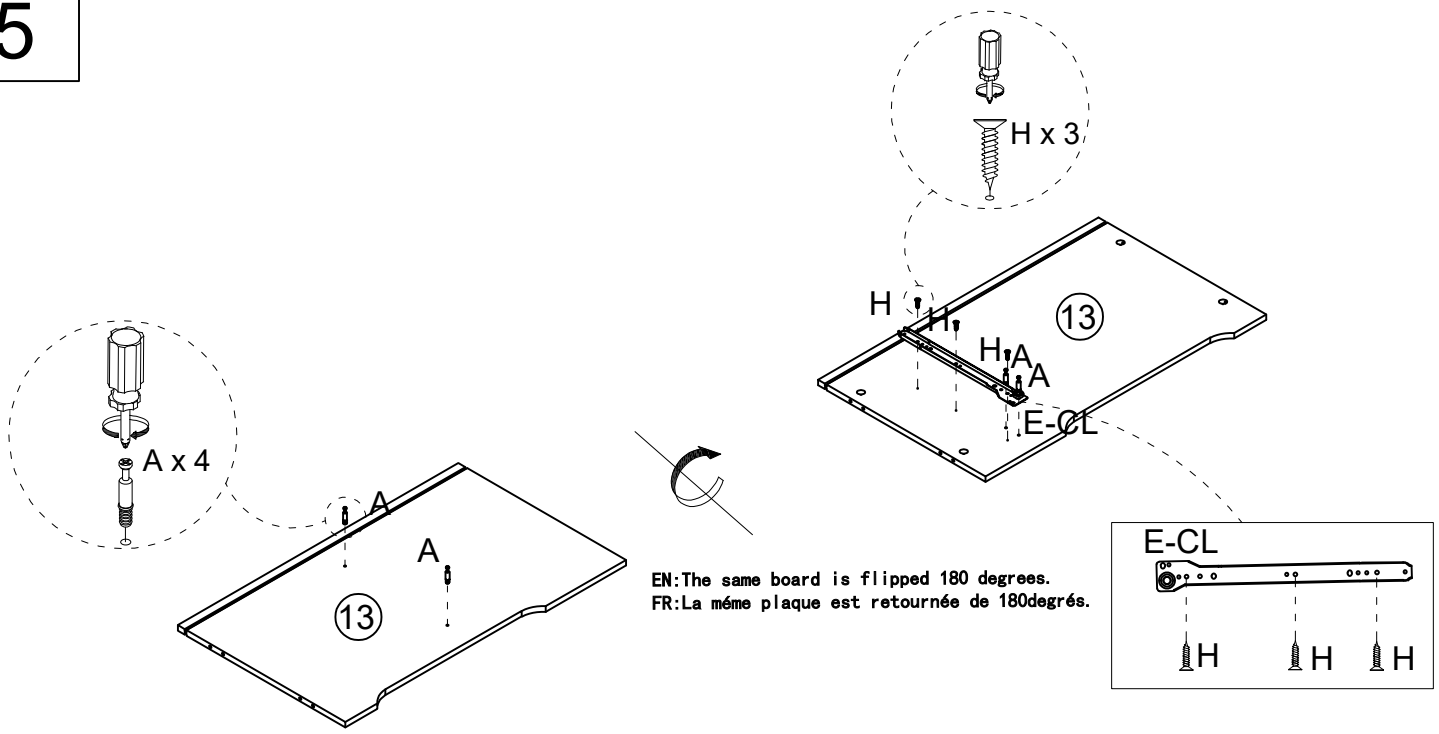
1





2

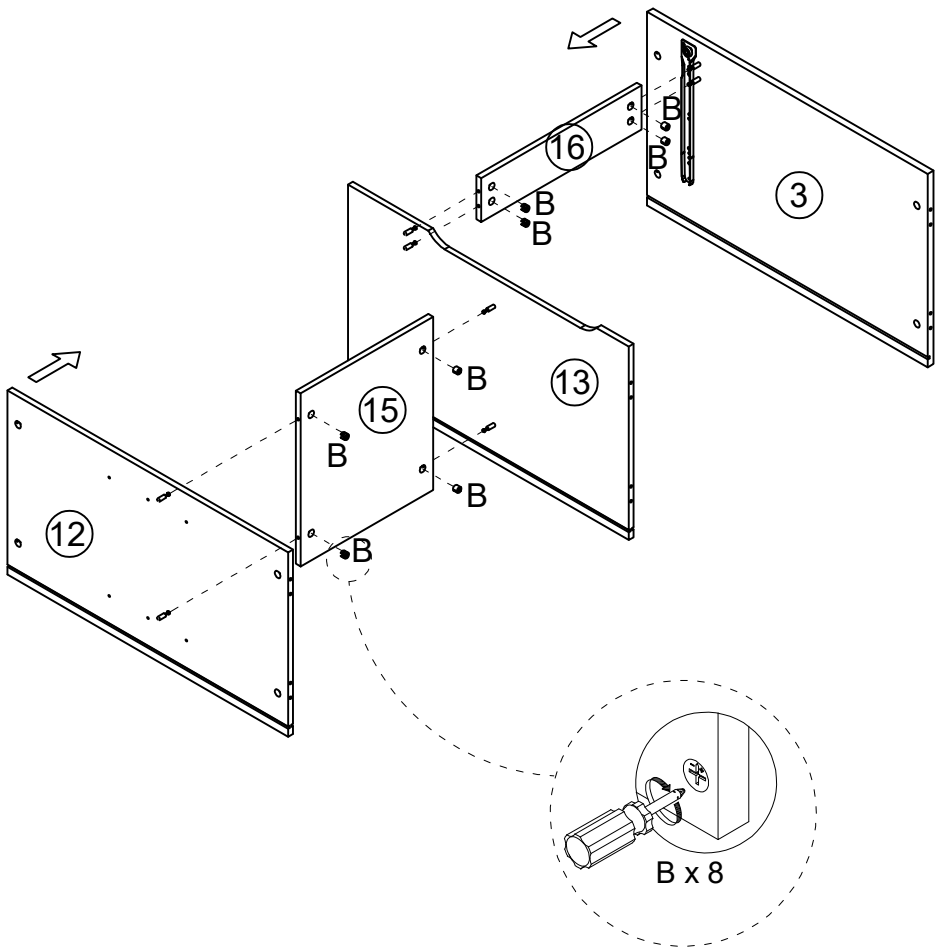
A	x4	E	x1	H	x3
					
M6X33mm		300mm		M3.5*12mm	

5



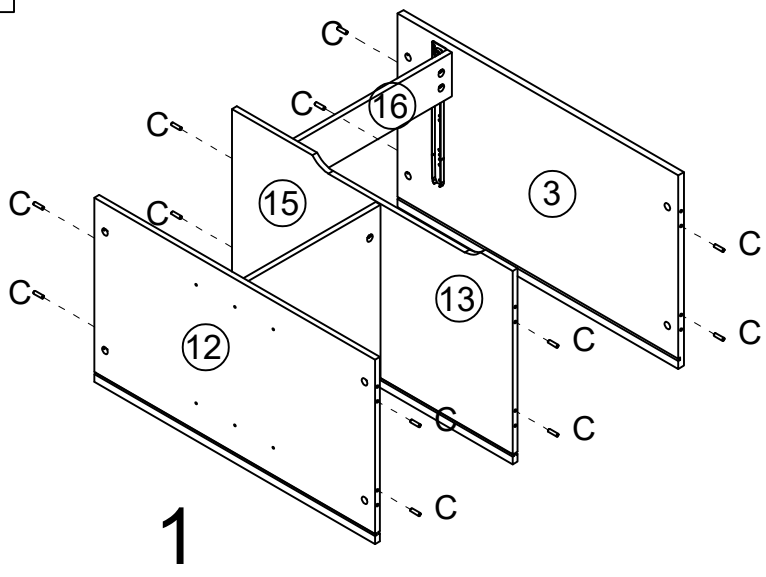
A	x4	E	x1	H	x3
					
M6X33mm		300mm		M3.5*12mm	

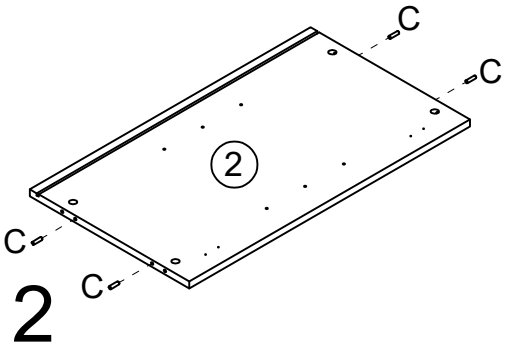
6




B	x8
	
ø12X10mm	

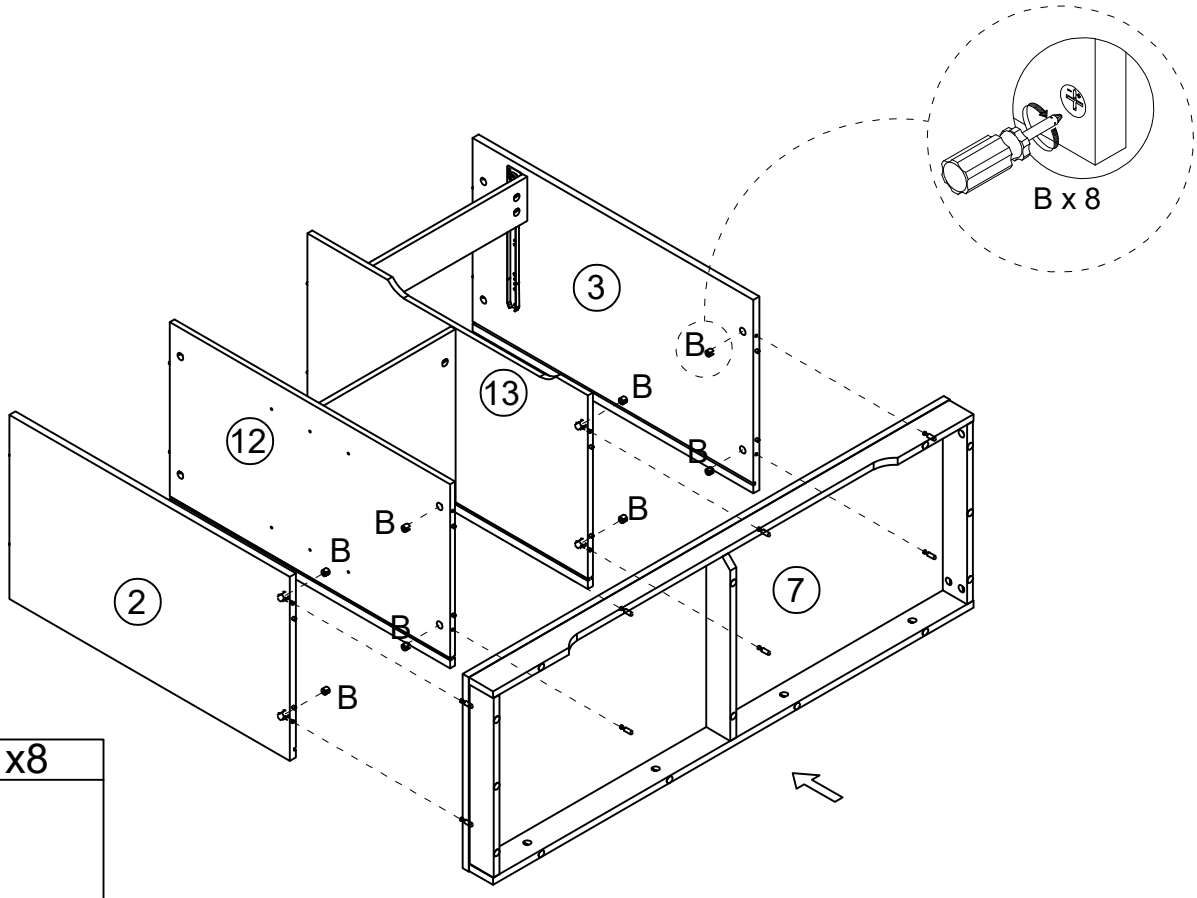
7





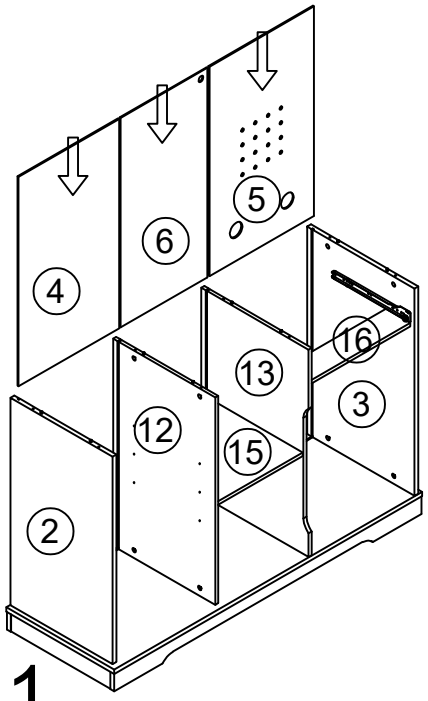
C	x16
	
Ø6X20mm	

8

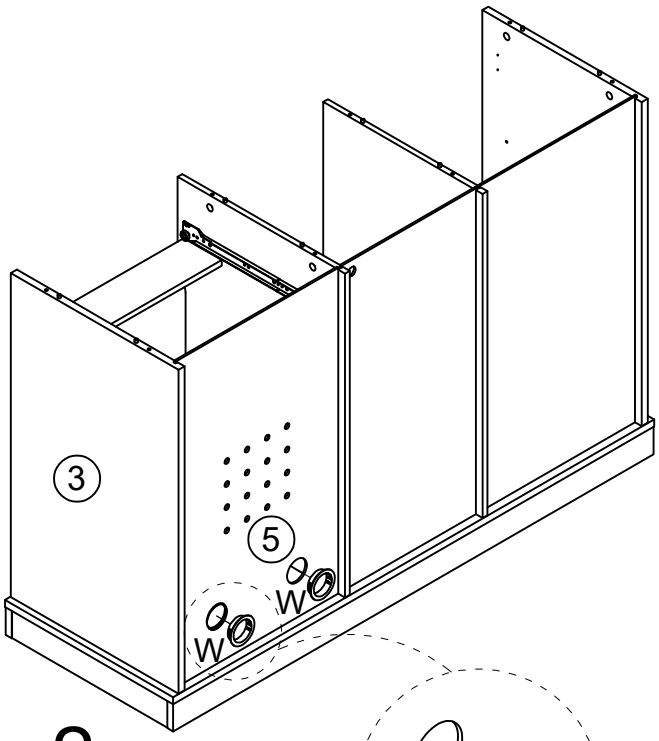


B	x8
	
Ø12X10mm	


9



1

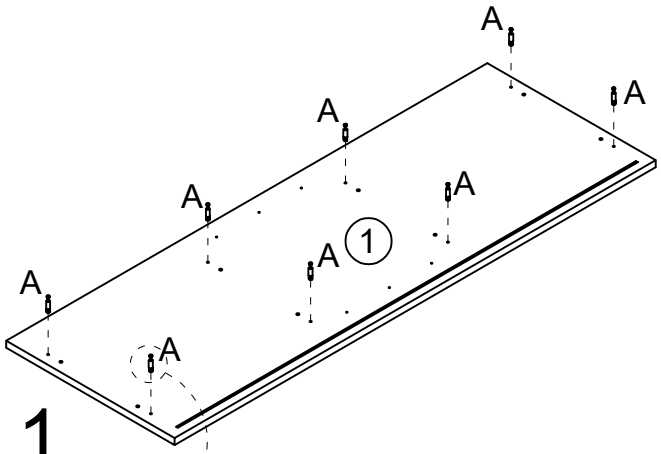


2




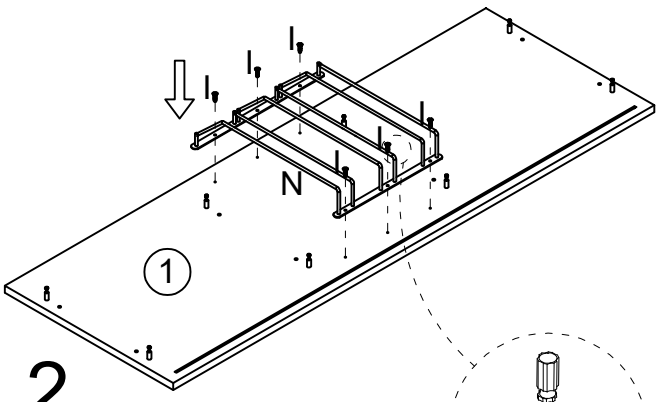
W	x2
	

10







1






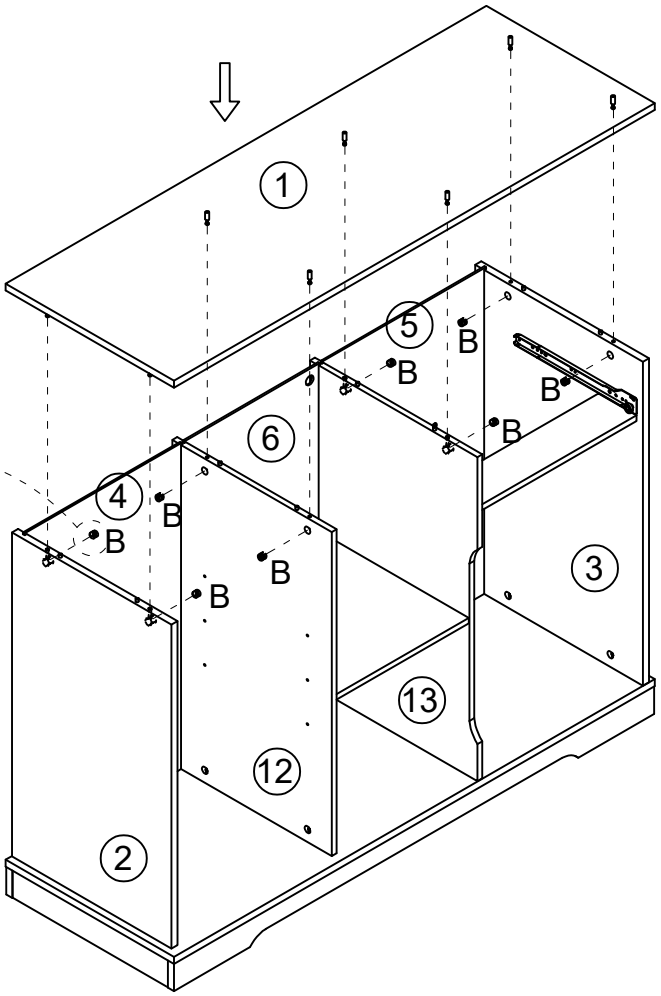
2



A	x8	N	x1	I	x6
					
M6X33mm		325*340*55mm		M3.5*14mm	

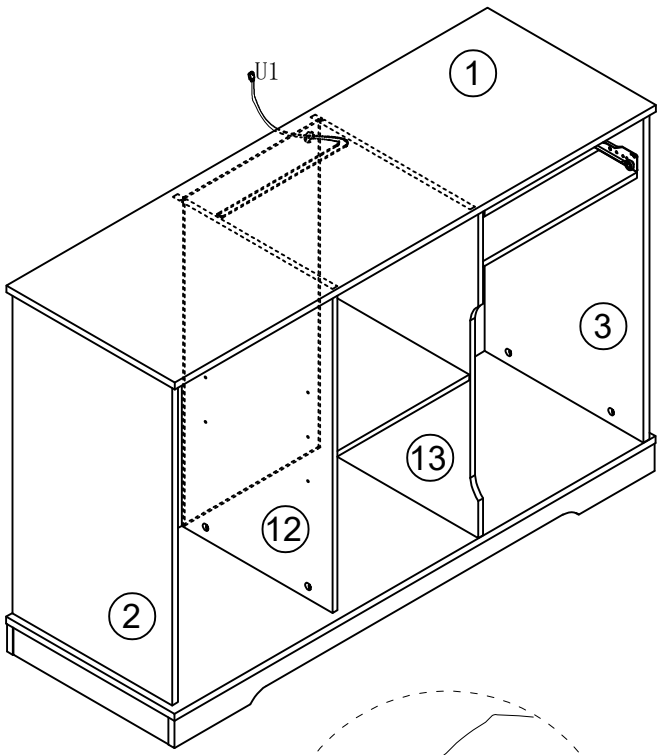
11

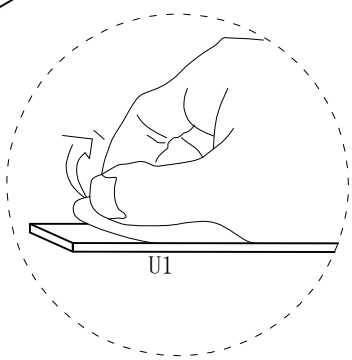


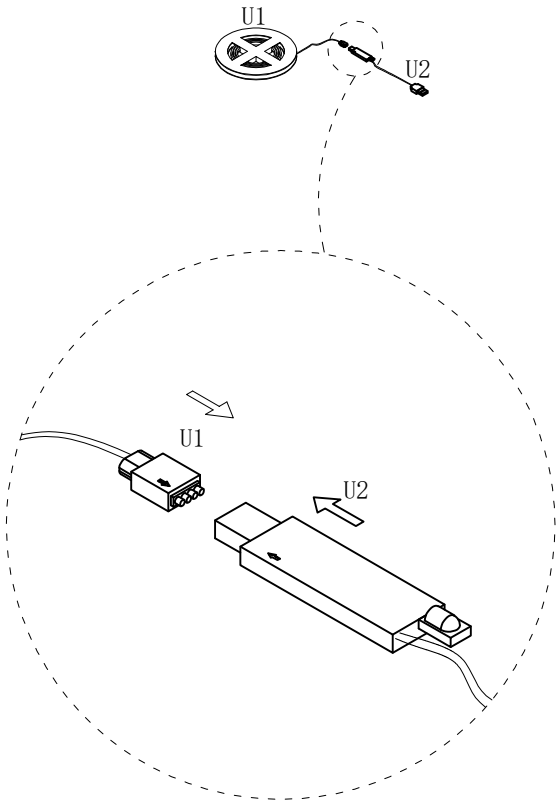



B	x8
	
Ø12X10mm	

12

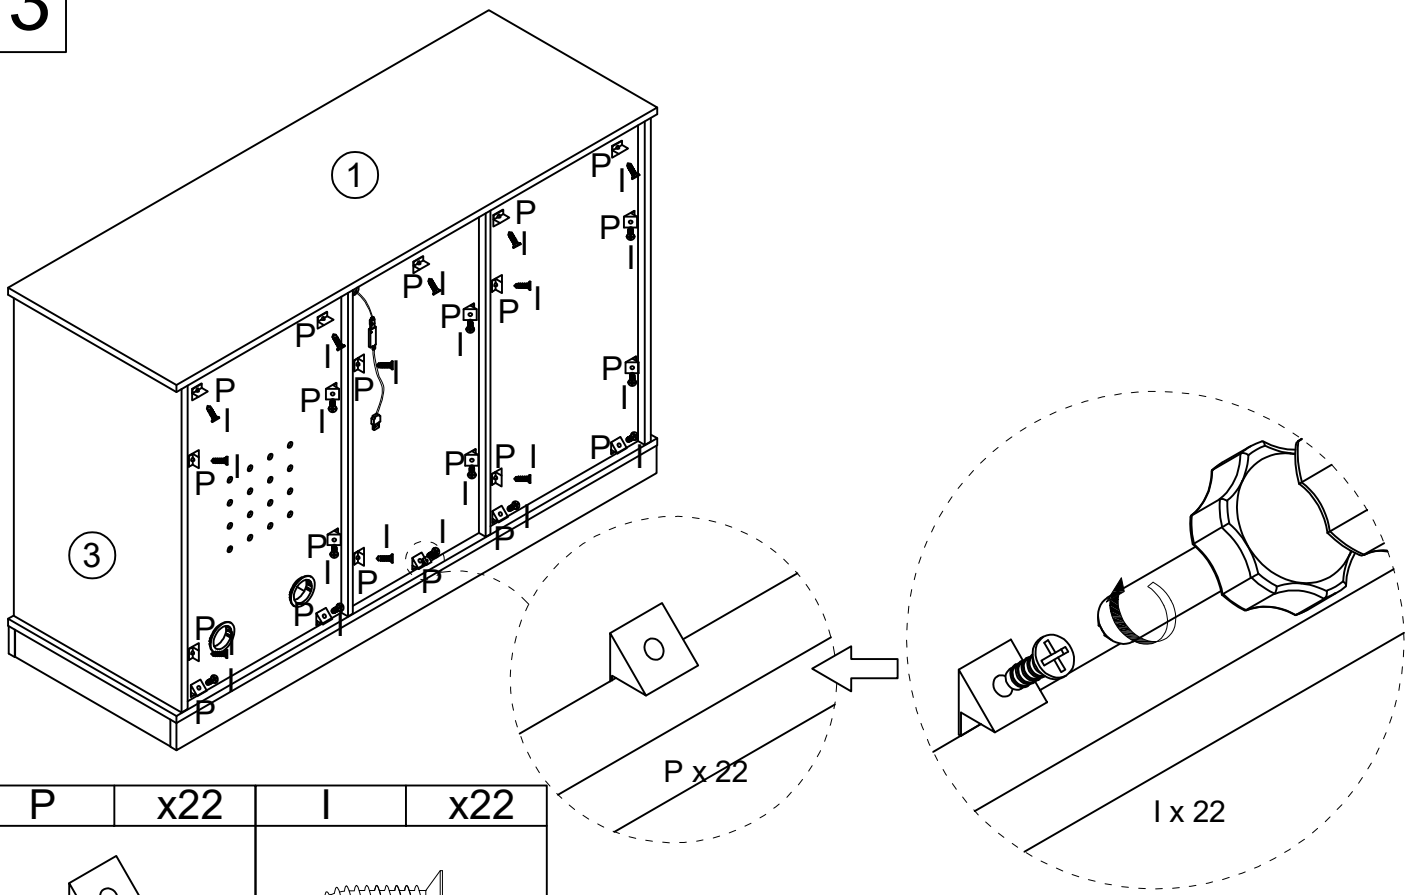







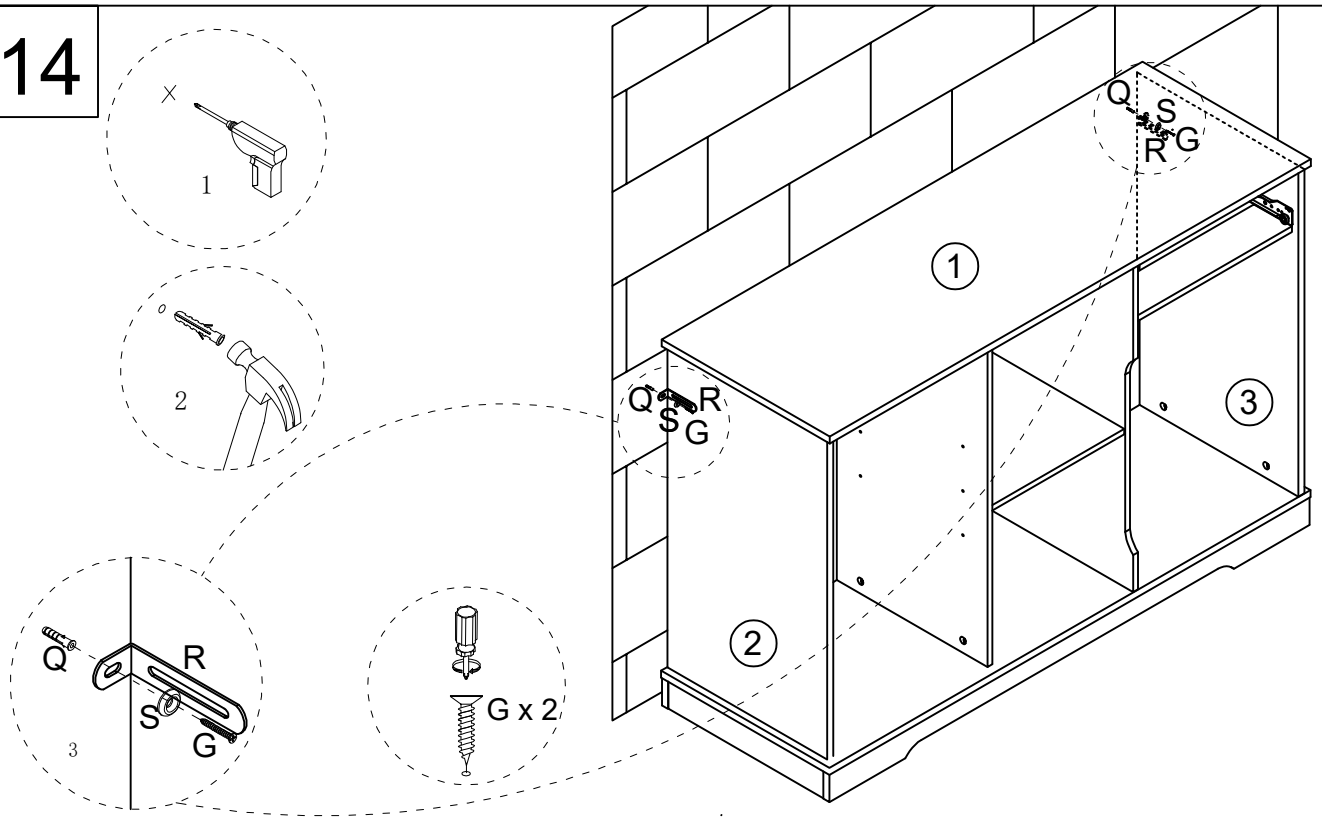
U	x1
	




13



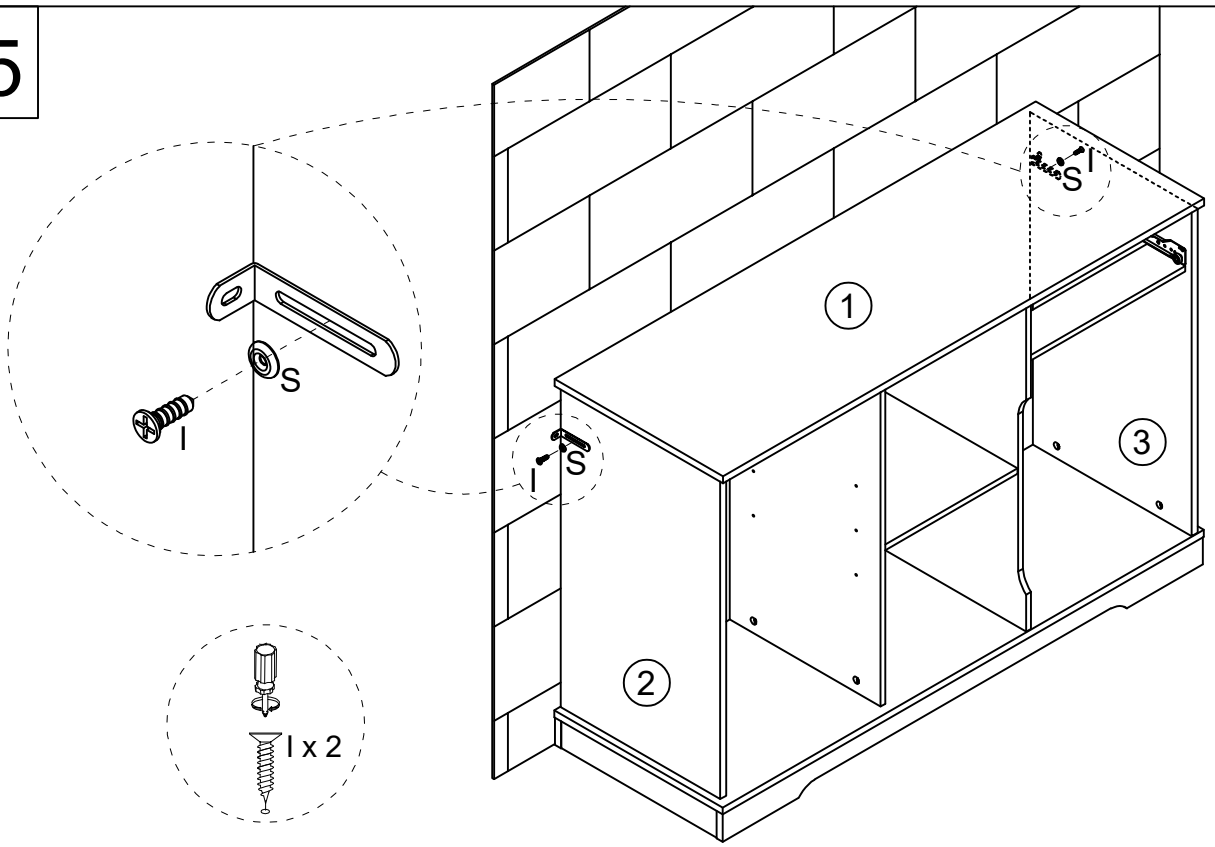
P	x22	I	x22
			
		M3.5*14mm	


14



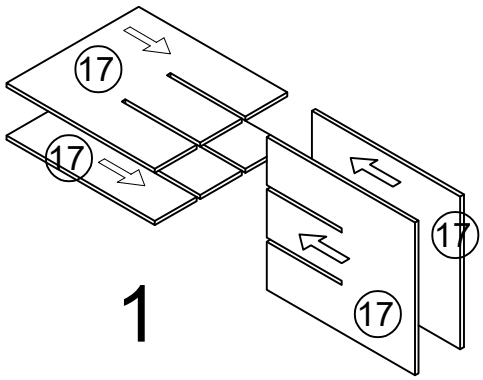
R	2	Q	x2	S	x2	G	x2
							
16mm		M7*27mm				M4*30mm	

15

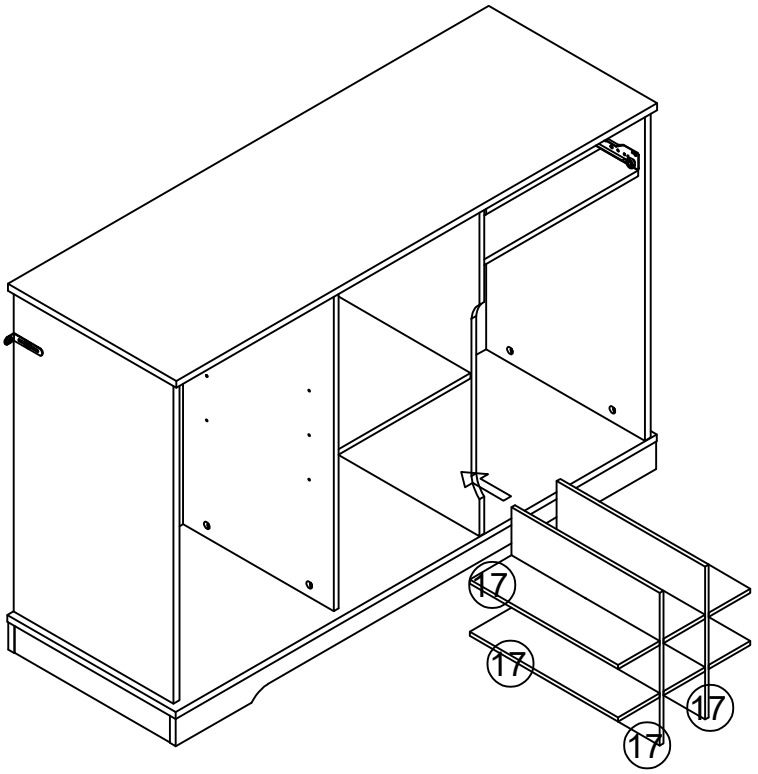


S	x4	I	x2
			
			M3.5*14mm

16

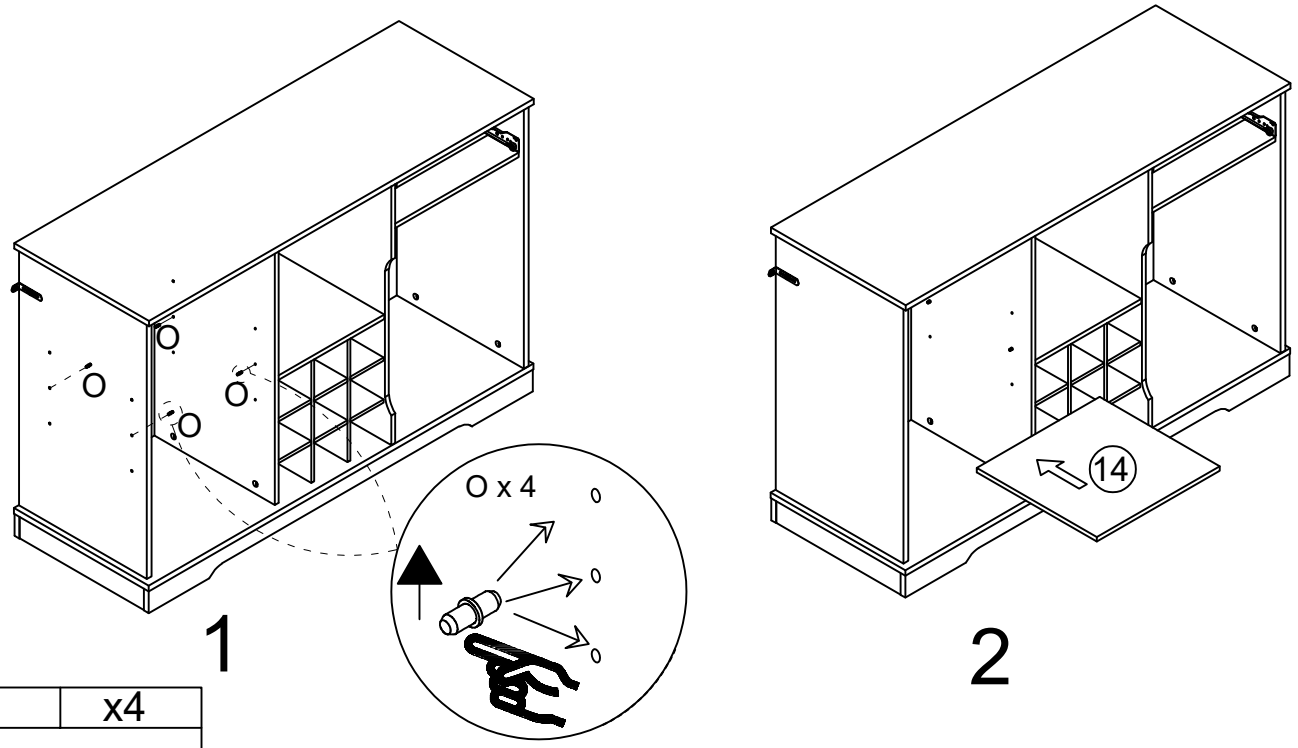



1



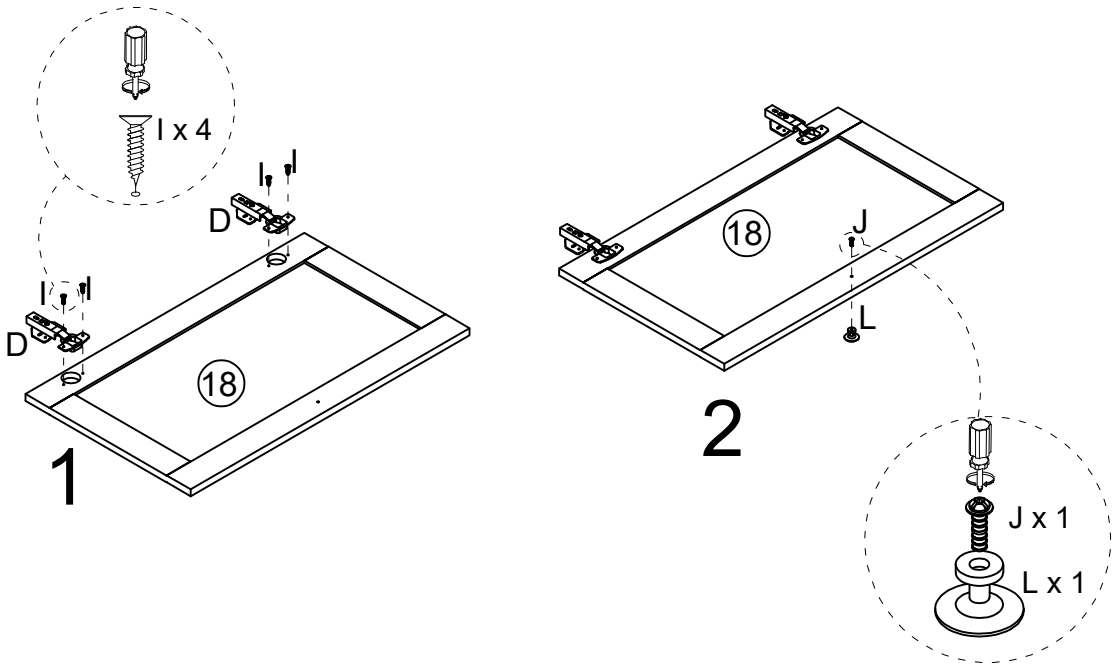
2



17



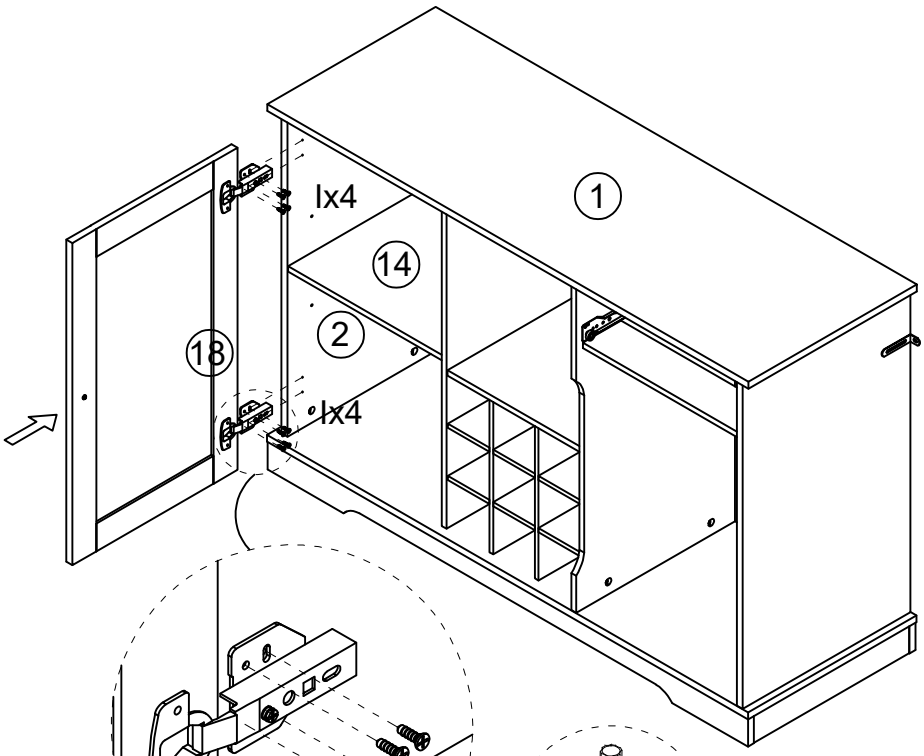
O	x4
	

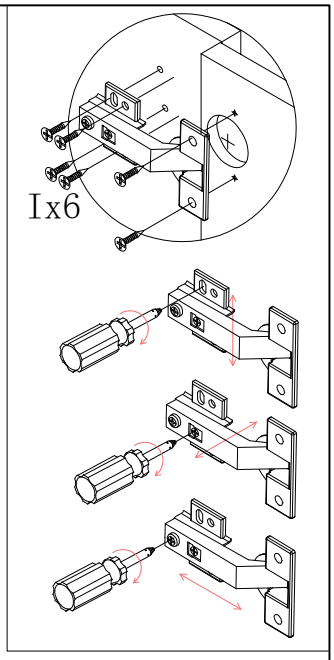
18





D	x2	I	x4	J	x1	L	x1
							
ø35		M3.5*14mm		M4*18mm			

19

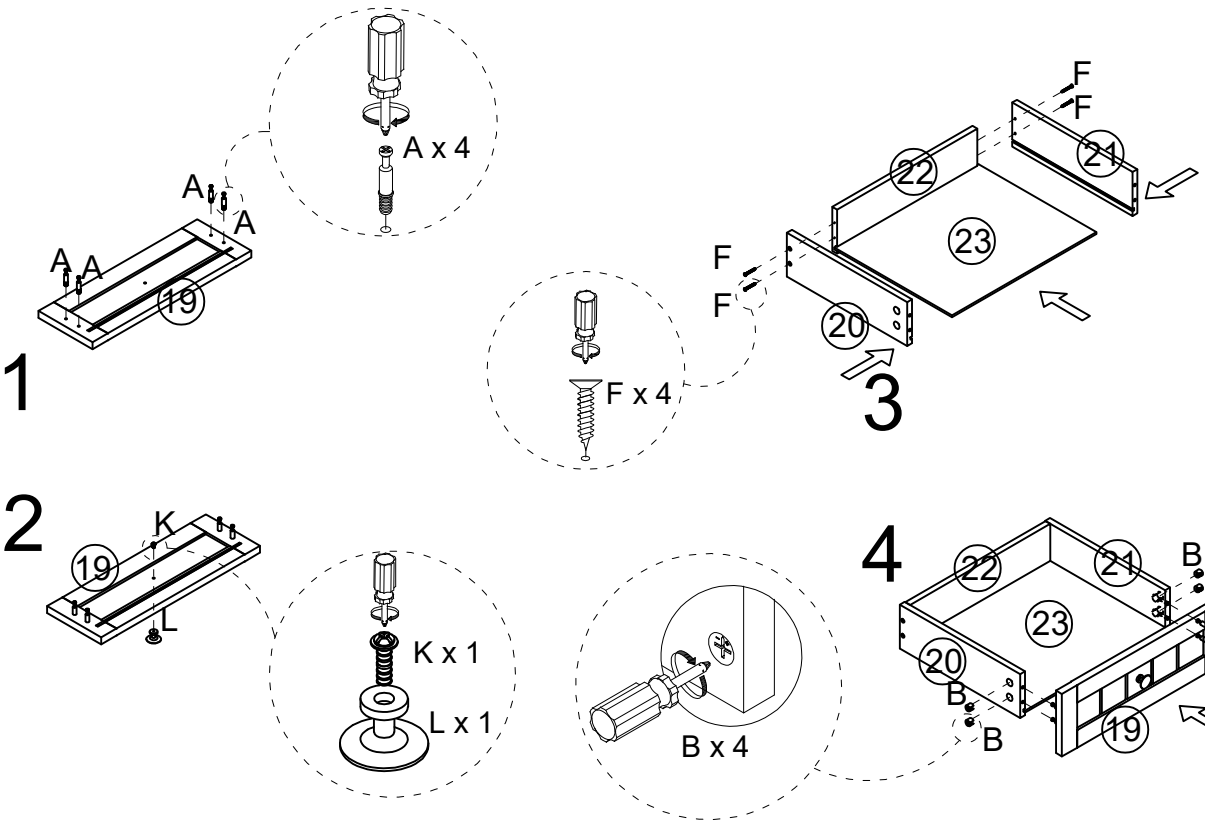







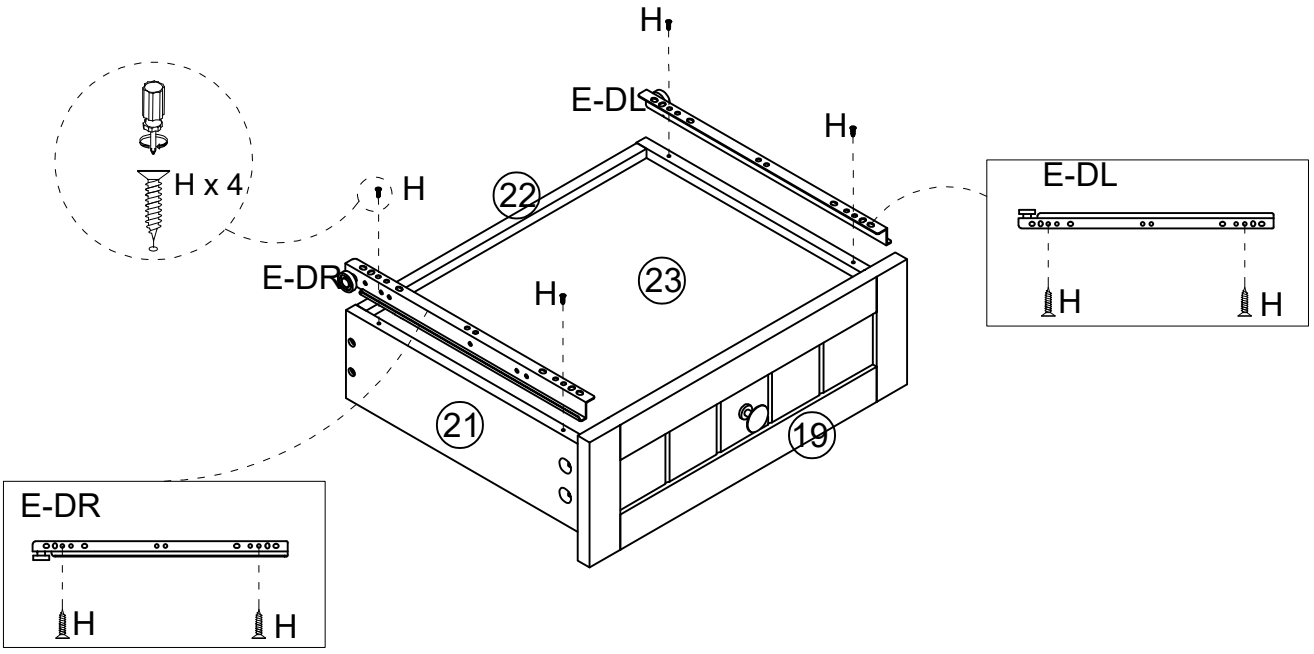
I	x8
	
M3.5*14mm	



20



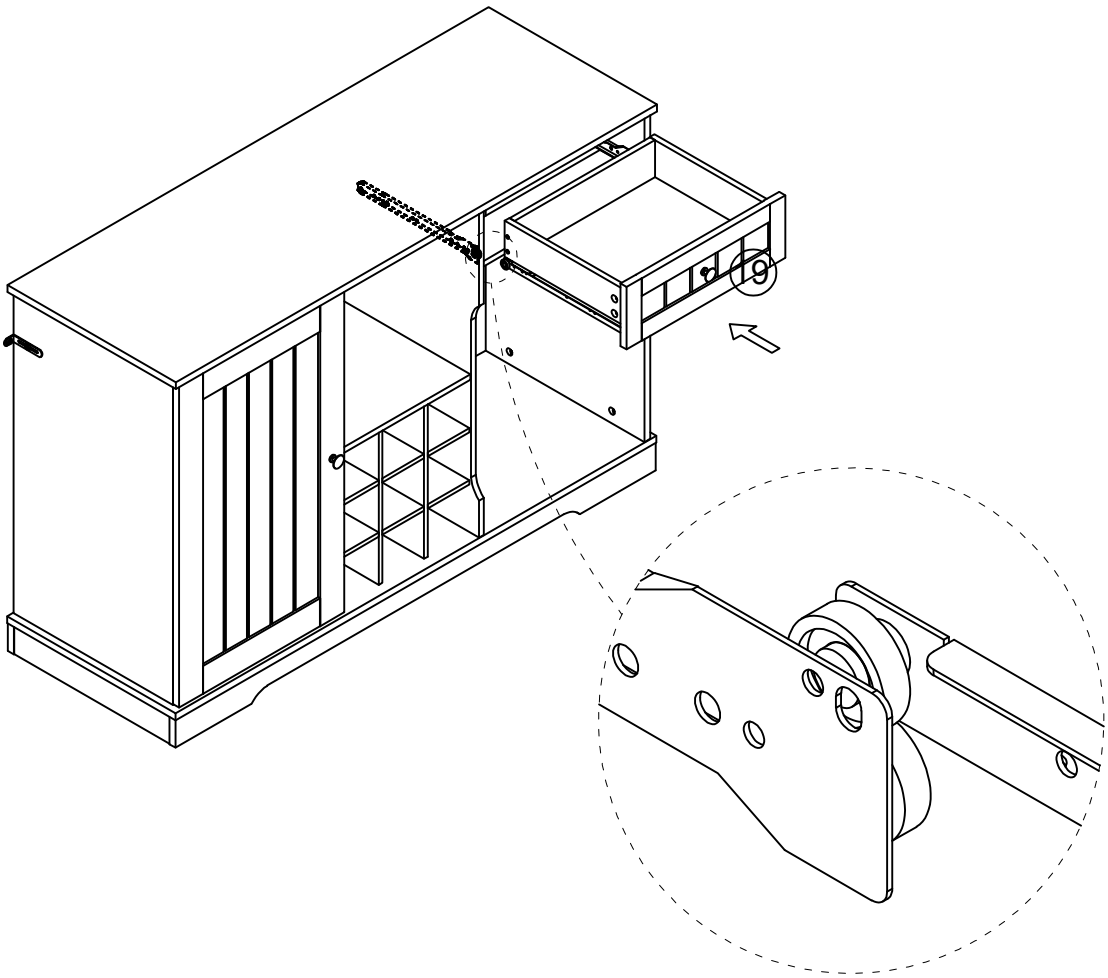
A	x4	B	x4	K	x1	L	x1	F	x4
									
M6X33mm		Ø12X10mm		M4*10mm				M3.5*35mm	

21

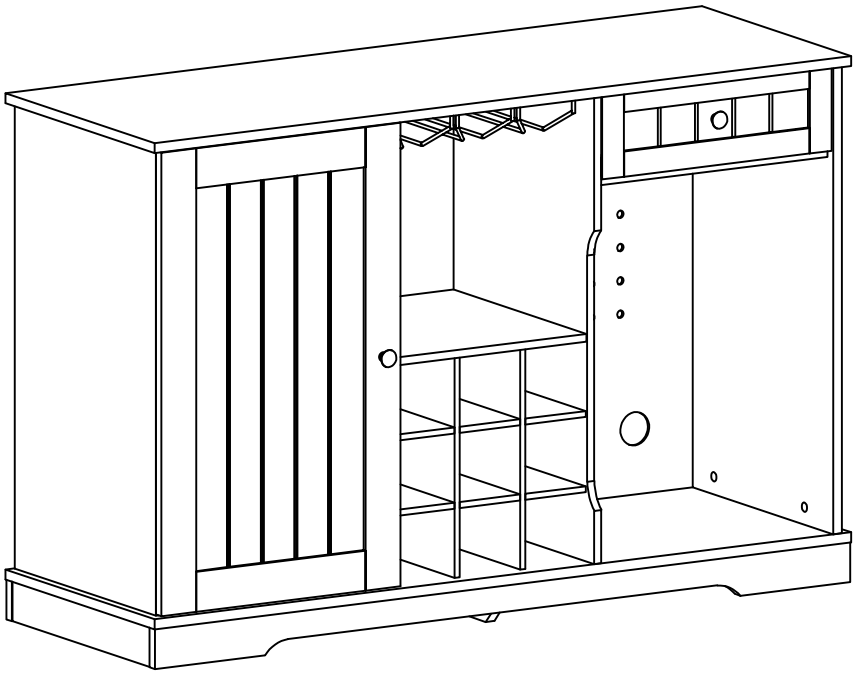


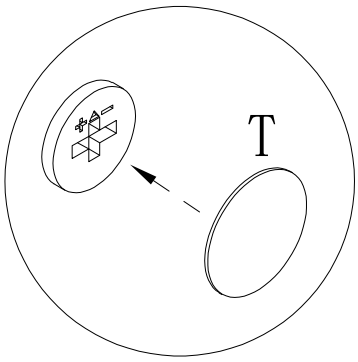
H	x4	E	x1
			
M3.5*12mm		300mm	

22



23





EN:In order to make the product more beautiful,please paste hardware T on the exposed holes.

FR:Afin de rendre le produit plus beau, s'il vous plaît coller le matériel T sur les trous exposés.

T	x24
	
Ø20mm	

APP PROGRAM USAGE



Scan two-dimensional code download APP

①Connect LED color strip and controller, power on controller

②Scan two-dimensional code download APP:

③Start APP,search and connect controller

④Enjoy the Bluetooth wireless control experience



Notes:

detailed operating instructions,

enter the menu "Guide":

Product Paramters:

-Bluetooth:BLEV4.2
-Input Voltage:4.5~26V
-Working Temp:-25~75
-Size:43*22*11mm
-Weight:30g
-Max Power:144W(24V)

LED mobile phone Bluetooth controllerProduct Features

-LED Bluetooth controller is directly via mobilephone control remote distance can reach 20m without the need to setupeasy to connect open the software within 5 seconds you can automatically connect the controller

-Flow the rhythm of the music changes

-Group control

-Brightness,speed addition and subtraction

-Maximum can be 10 meters RGB(W)strip

-The software shows that the text is based onthe language of the mobile phone set up automatic transformation of Chinese and English

ANIMATION EFFECTS:

-Colorful gradient

-All kinds of monchrome,double color gradient

-All kinds of monochrome,double color,colorfull flashing

-Colorful jump

-Follow the thythm of the music chagnes

APP-PROGRAMMANWENDUNG





REMARQUE :
Guide détaillé dans le menu "Guide"

CARACTÉRISTIQUES

- Bluetooth : BLEVA 2
- Tension d'entrée : 4.5~26V
- Température : -25~75°C
- Dimensions : 43×22×11 mm
- Poids : 30g
- Puissance max : 144W (24V)

ÉTAPES DE CONNEXION

①Connecter bande LED & contrôleur, allumer

②Scanner QR code pour télécharger l'app :

③Lancer l'app, rechercher & connecter

④Profiter du contrôle Bluetooth sans fil

FONCTIONNALITÉS

- Contrôle direct par smartphone (20m)
- Connexion automatique en 5 secondes
- Synchronisation musicale
- Contrôle de groupe
- Réglage luminosité/vitesse
- Prise en charge bandes ≤10m RGB(W)
- Basculage automatique FR/EN

EFFETS D'ANIMATION

- Dégradés de couleurs
- Dégradés uni/bicolores
- Clignotements mono/colorés
- Saut de couleurs
- Effets réactifs à la musique

Certificate – Сертификат – 證明書 – Certificat – 증명서 – شهادة

Shenzhen ZKT Technology Co., Ltd.
1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue,
Fuhai Street, Bao'an District, Shenzhen, China

SUPPLIER'S DECLARATION OF CONFORMITY

Certificate Number: ZKT-2305193665C

Certificate's Holder	:	Shenzhen Leiling Technology Co., LTD. No.215,Shahu Tongyu Road,Shuhu Community, Biling Street,Pingshan District,Shenzhen.
Manufacturer	:	Shenzhen Leiling Technology Co., LTD. No.215,Shahu Tongyu Road,Shuhu Community, Biling Street,Pingshan District,Shenzhen.
Trade Mark	:	LL
Product	:	5V LED Strip
Model(s)	:	5050/30LED RGB 5050/30LED BLUE,5050/30LED WHTE. WARM WHITE.RED.BLUE.GREEN.YELLOW.RGB 5050/60LED WHTE. WARM WHITE.RED.BLUE.GREEN.YELLOW.RGB 2835/60LED WHTE. WARM WHITE.RED.BLUE.GREEN.YELLOW.RGB 2835/120LED WHTE. WARM WHITE.RED.BLUE.GREEN.YELLOW.RGB
Test Standard	:	FCC Part 15 B, ANSI C63.4:2014

This Attestation of Compliance is issued on a voluntary basis for electrical equipment below the voltage limits of FCC standard. The essential requirement are fulfilled accordingly based on the technical specifications applicable at the time of issuance. See also notes overleaf. It is only valid in connection with the test report number: ZKT-2305193665E.

FC

Technology APPROVED Manager
May. 25, 2023

This Certificate of Conformity is based on single evaluation of the submitted sample(s) of the above mentioned product. It does not imply an assessment of the whole product and relevant . Directives to be observed.

☎ +86-400 000 9970 +86-755-22336688 ✉ zkt@zkt-lab.com www.zkt-lab.com