

## DESCRIPTION

- Metal construction with chrome plated finish
- 2 piece clamshell design for easy installation & maintenance
- Transitional style
- Single mount
- Vandal resistant aerator
- Flexible stainless steel supply lines

## OPERATION

- Adjustable sensor activation distance
- Vandal Mode: 30 second time-out feature
- Sentinel Flow: Eliminates stagnant water in supply lines every 24 hours (factory setting – off)
- Maintenance / Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Battery 4(AA) or AC powered
- Low battery indicator light
- Battery life: Up to 6 years or 350,000 cycles\*
- Built-in mixing-manual on/off handle (8554AC/8554 models)
- In-line filters included

## FLOW


- 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA compliant

## WARRANTY


- Warranted for 5 years against material or manufacturer defects

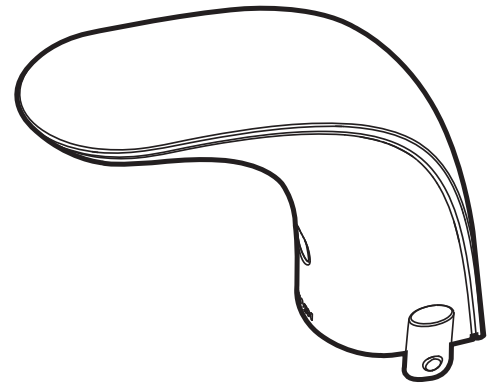



## Electronic Faucet Above-Deck Transitional Style

**Model: 8554, 8554AC (mixing)**

**NOTE:** DESIGNED TO BE INSTALLED THROUGH ONE HOLE 1-1/4" MIN. DIA.  
(see the following page for model 8554AC)

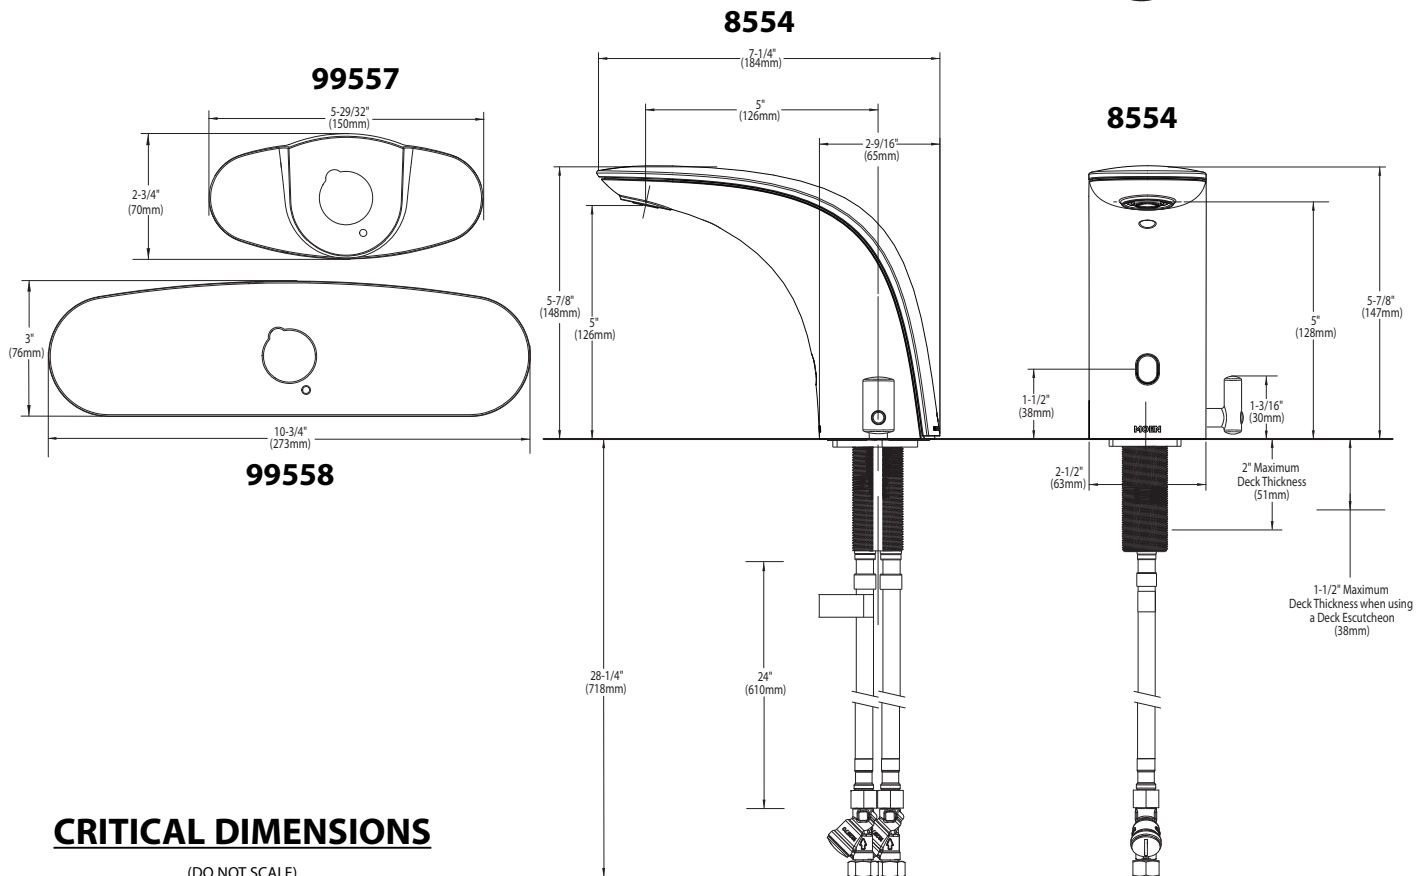

\* Typical alkaline battery life at 200 uses per day is about 3 years

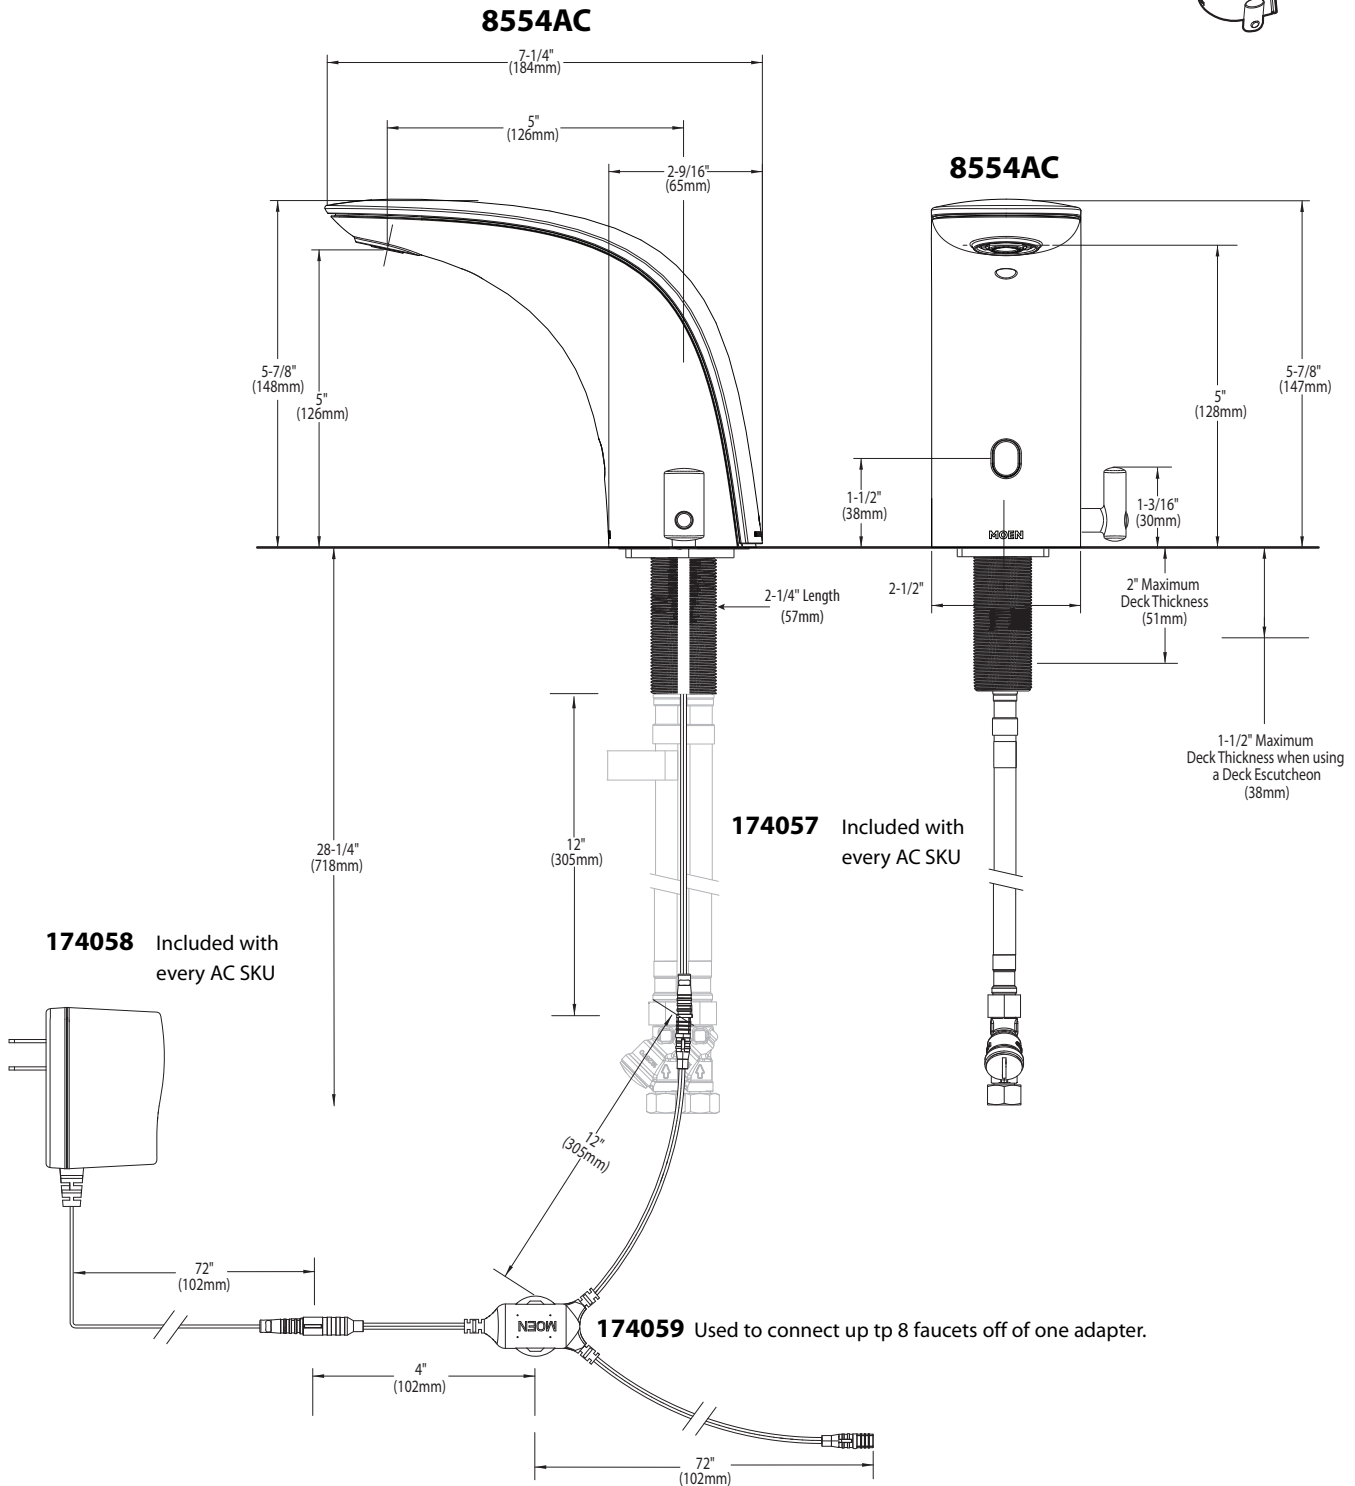

## CRITICAL DIMENSIONS

(DO NOT SCALE)