

## **PENDANT FIXTURE** **INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

### **CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### **ASSEMBLY AND INSTALLATION**

- Connect the Pipe (1),(2),(3),(4), (5) together with the fixture. Then screw with the Swivel.
- Attach two Screws outward through the CROSS BAR, spin the Hex nut to the Screw, then attach the CROSS BAR to the OUTLET BOX by the two MOUNTING SCREWS.
- Make wire connections:
  - Ribbed wire(w/o marking) from light to WHITE WIRE from power source.
  - Smooth wire(w/ marking) from light to BLACK WIRE from power source.
  - Loop the GROUND WIRE to CROSS BAR with a GREEN SCREW.
- Place the CANOPY against the OUTLET BOX by screwing the Ball Nut, then screw socket cup onto the socket.
- Install bulbs: (Bulbs not including in the package)  
(Please don't exceed the maximum capacity that recommended on the Sockets)

INSTALLATION IS NOW COMPLETED.

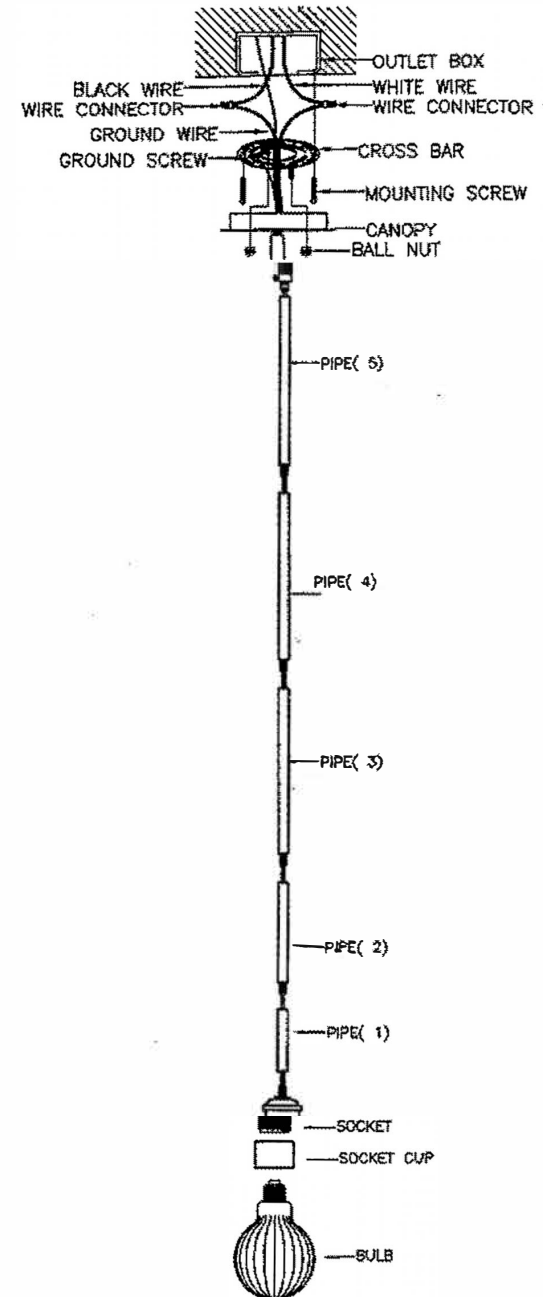

ITEM NO. 1151-BN, 1151-ES