
SICOTAS

SC139A1XBNY1618 I SC139A1XLTY1619

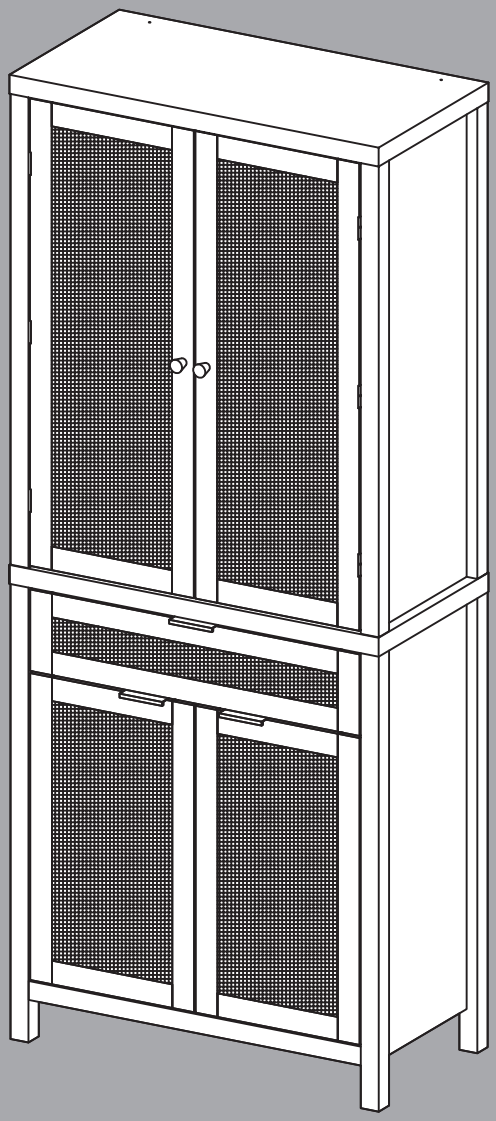

Savanna Collection

Assembly Instructions

Before beginning the assembly process, please read and save these instructions for reference.
Following these guidelines will ensure a smooth and successful assembly of your product.

1. Part Identification:

Carefully separate and identify all the parts included in your package. Confirm that you have all the components listed in the instruction manual. This step will help you avoid any missing or misplaced parts during assembly.

2. Work Surface:

To prevent any scratches or damage to the product, assemble it on a soft mat or a similar protective surface. This will provide a cushioned area for the components and protect the surfaces from unwanted marks.

3. Step-by-Step Assembly:

Follow the assembly instructions provided, proceeding one step at a time. Take care to understand each step properly before proceeding to the next one. This sequential approach ensures that the assembly is done correctly and minimizes the chance of errors.

4. Proper Screw Seating:

When attaching screws and nuts, it is essential not to fully tighten them until all screws are correctly seated. By partially tightening each screw and nut initially, you can ensure that they are aligned properly and fit securely before final tightening.

5. Avoid Over-Tightening:

While each screw and nut should be tightened correctly, it is crucial not to over-tighten them. Over-tightening can cause damage to the product or compromise its structural integrity. Use the appropriate amount of force to secure the components without excessive tightening.

SICOTAS customer help center:

If you encounter any questions or problems during the assembly process, please do not hesitate to contact us.

We strive to provide excellent customer support and will respond to your inquiries within 24 hours. Our team will offer you a suitable solution to address any concerns you may have.



Email:
service@sicotas.com



Website:
www.sicotas.com



Phone:
(833) 742-6827



Official Website:



WhatsApp:



YouTube:



Instagram:




Facebook:



TikTok:

Parts List

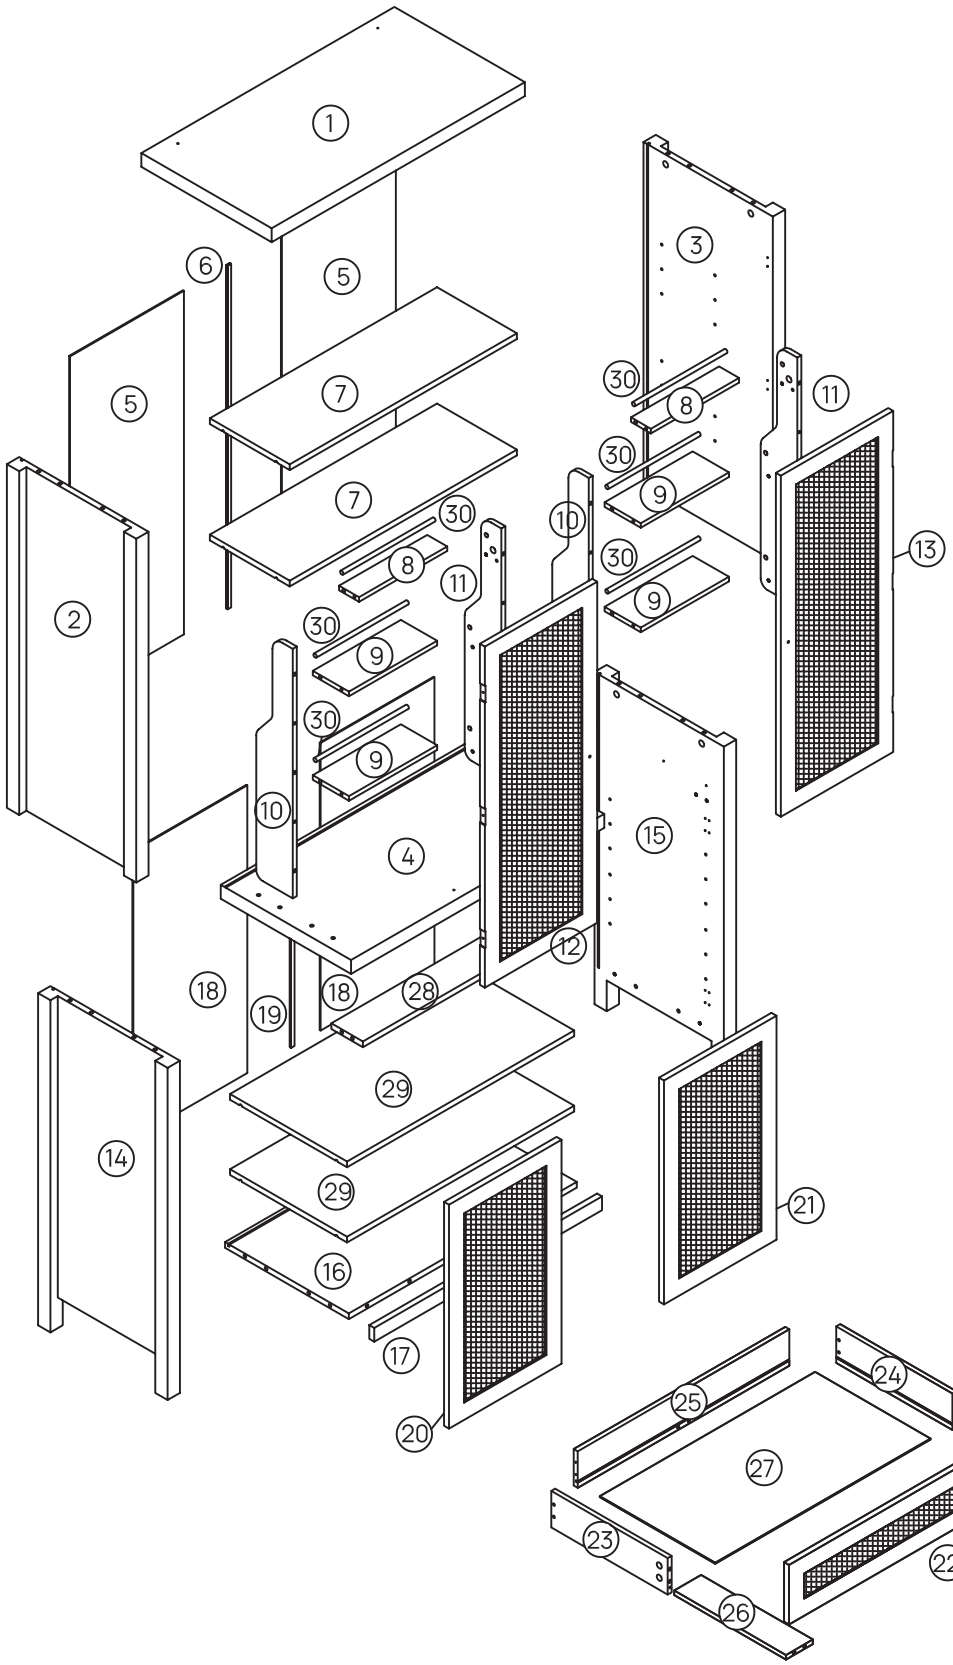
1
6
5
3
5
7
30
8
11
7
30
9
30
10
13
8
11
30
9
2
30
9
30
9
10
15
4
12
18
19
18
28
29
14
29
21
16
17
24
25
20
27
23
22
26


Hardware List




Code	Description	Quantity
A	ø15x9.5mm Cam lock	49+2
B	ø6x24mm Cam bolt	49+2
C	ø8x30mm Wood dowel	18+2
D	ø6x30mm Wood dowel	20+2
E	Foot pad	4+1
F	Handle	3
G	Handle	2
H	ø3x16mm Screw	28+2
I	ø4x15mm Screw	2
J	Backboard clip	22+2
K	Iron sheet	6+1
L	Hinges	6
M	Wall bracket	2
N	ø7x48mm Screw	4+1

Code	Description	Quantity
O	Wall anchor	2
P	M4x18mm Bolt	2+1
Q	Magnetic suction	1
R	ø3.5x12mm Screw	42+2
S	Shelf support	16+2
T	Magnetic suction	2
U	ø4x30mm Screw	6+2
V	ø3x12mm Screw	12+2
W	Hinges	4
X	ø4x35mm Screw	2
Y	ø4x14mm Screw	24+2
Z	4mm Hex key	1
	Drawer runnner set	1


Step 1

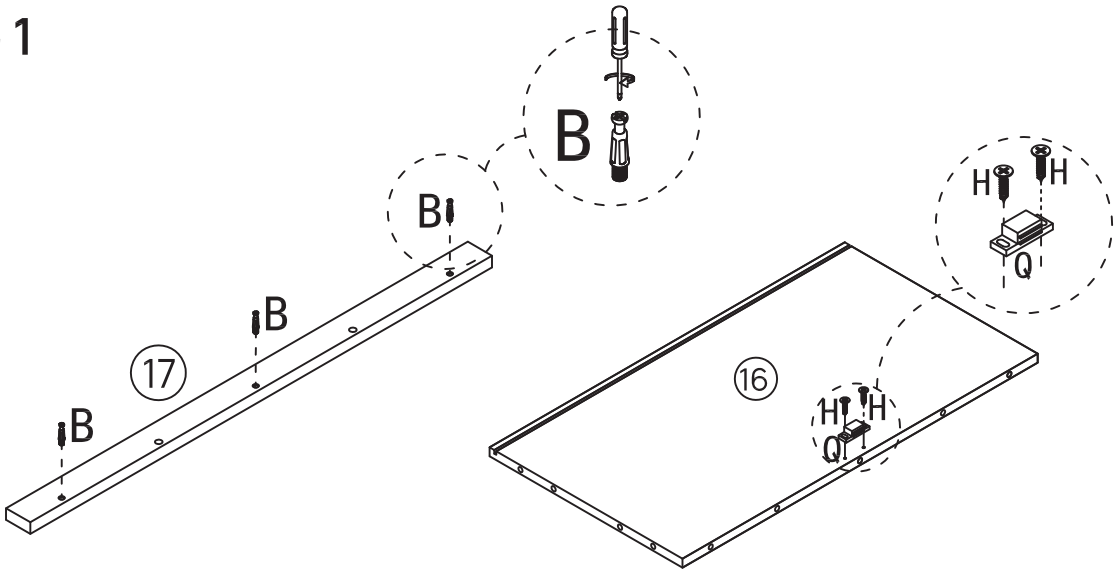





B *3	H *2	Q *1
		

Step 2

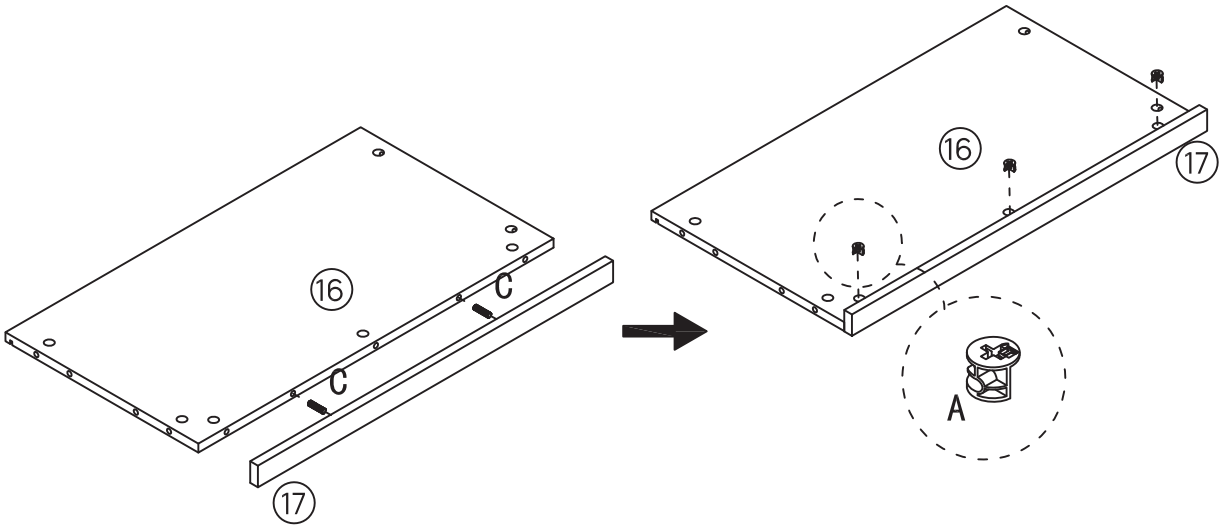







A *3	C *2
	


Step 3

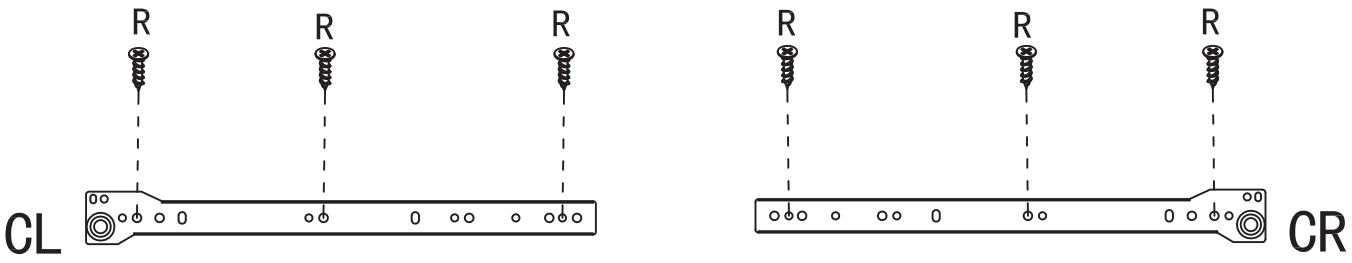

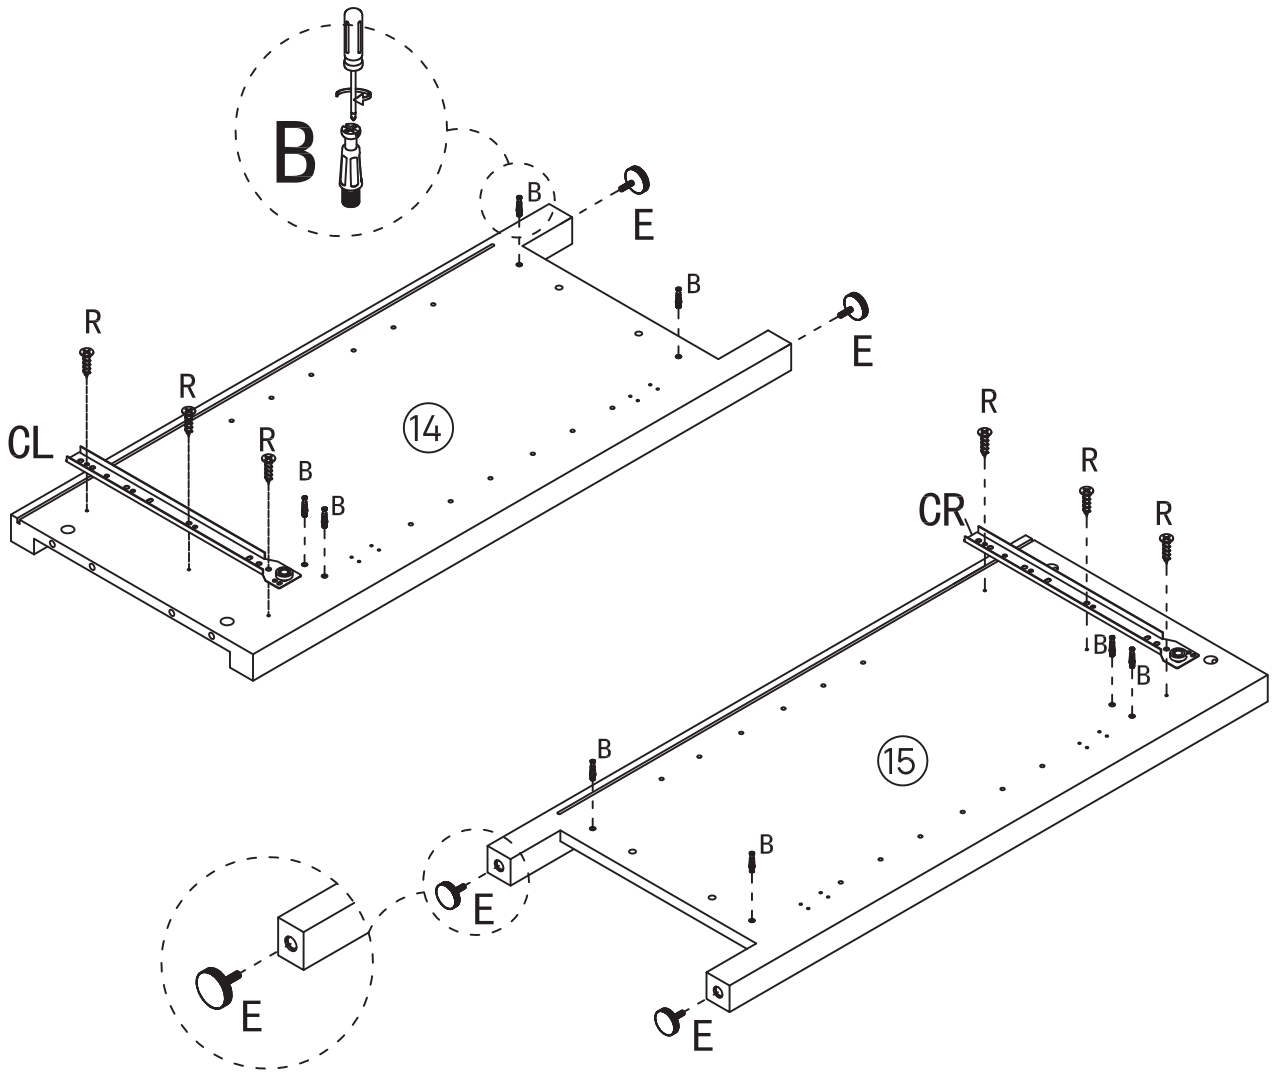


B *8	E *4	R *6
		


Step 4

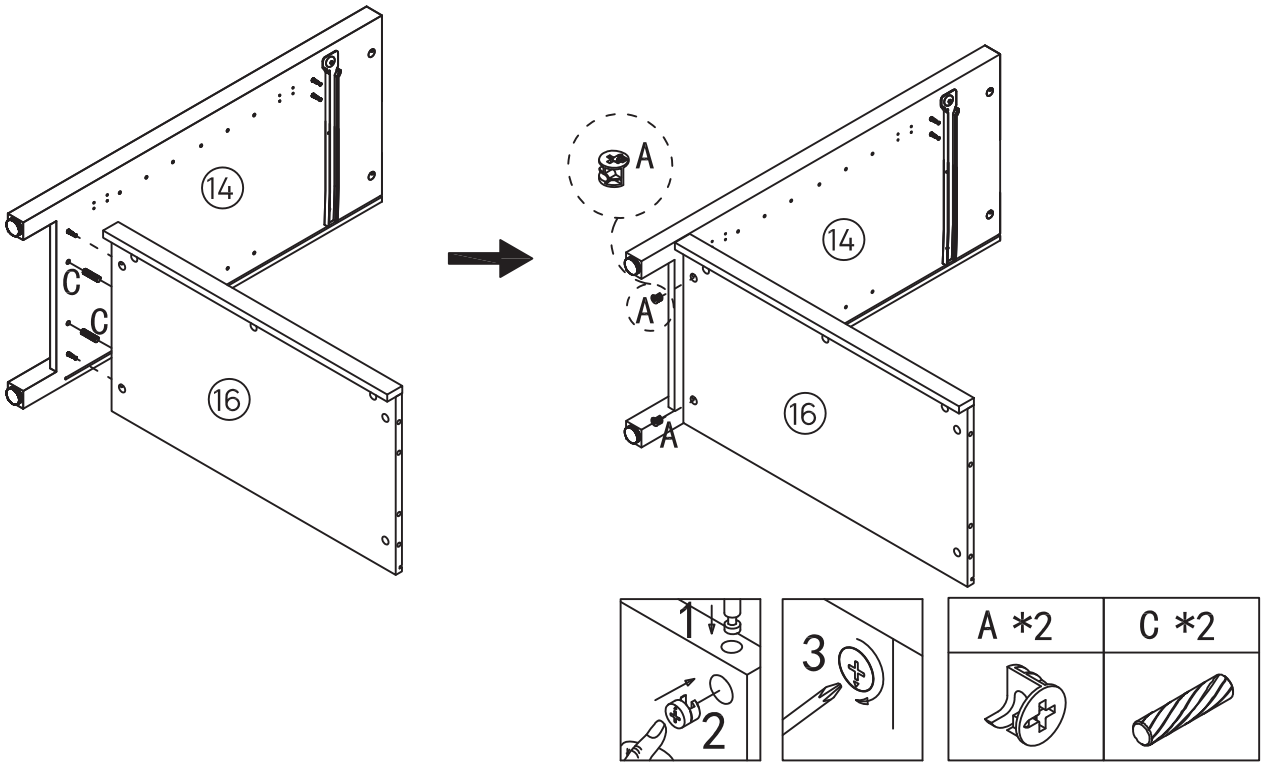


Step 5

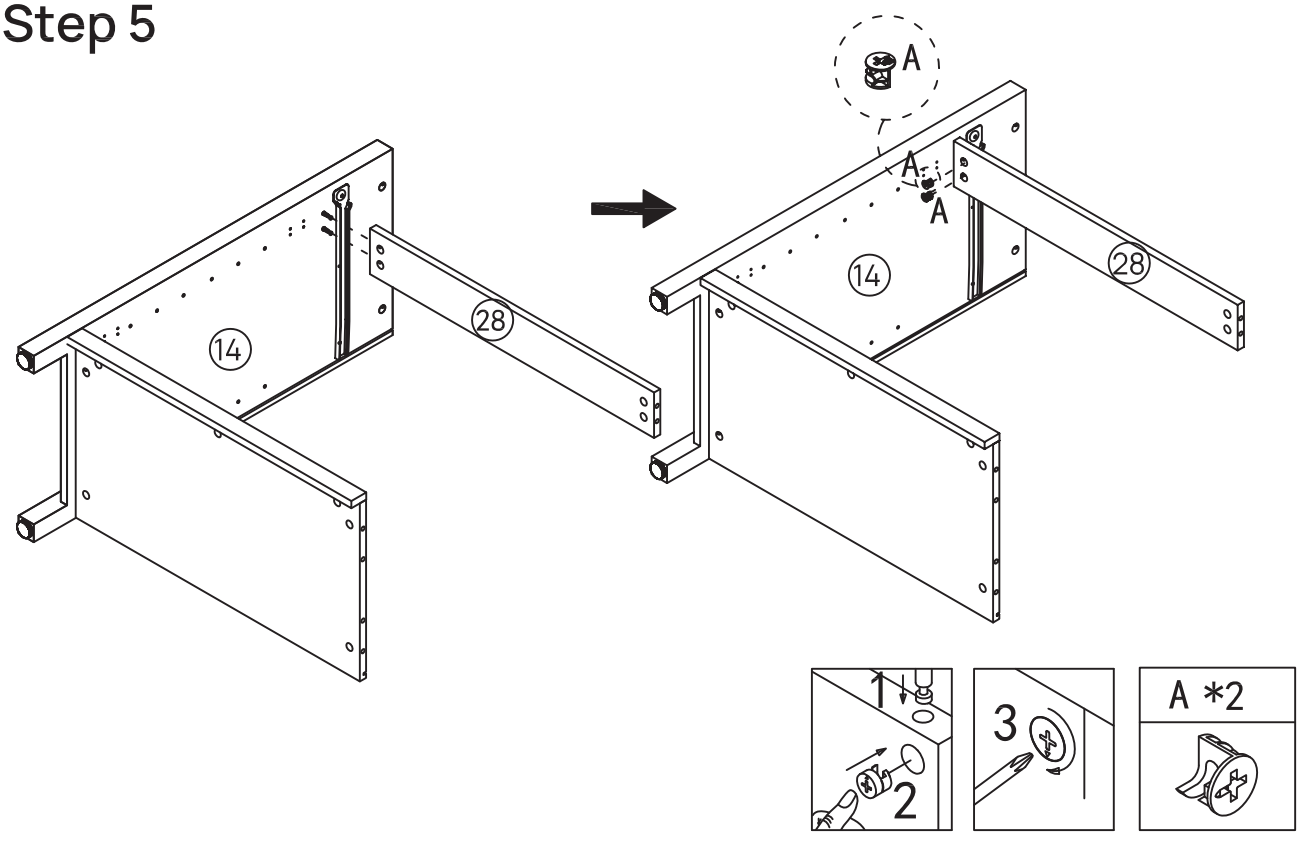



Step 6

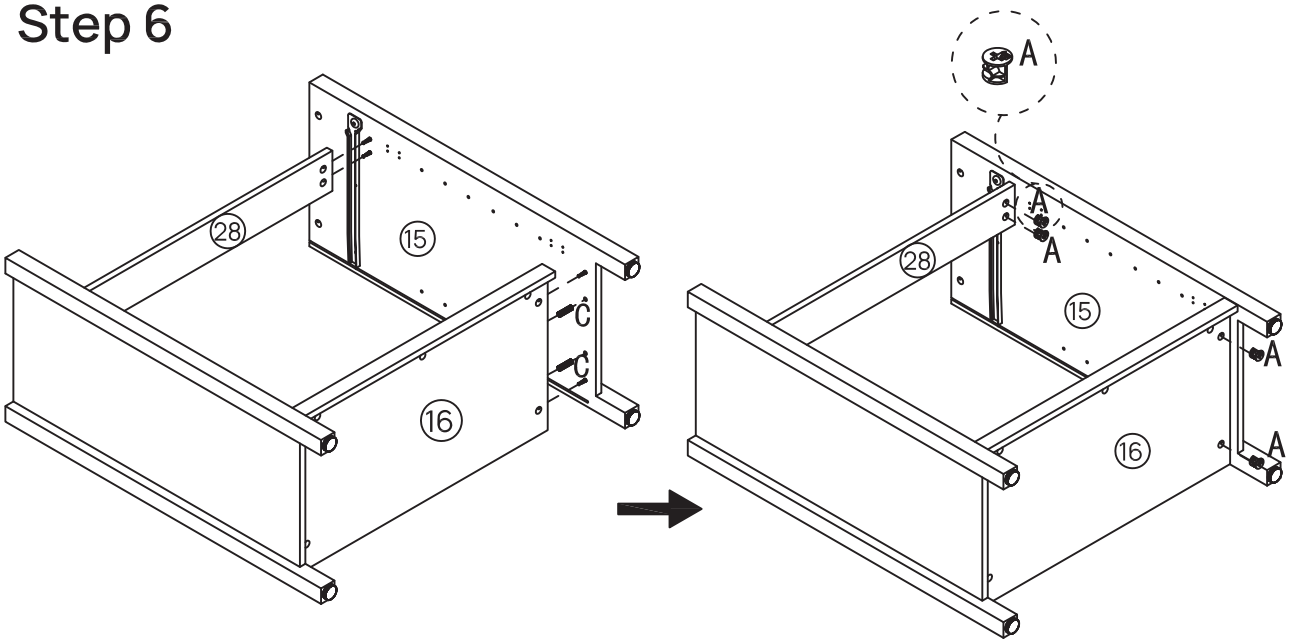


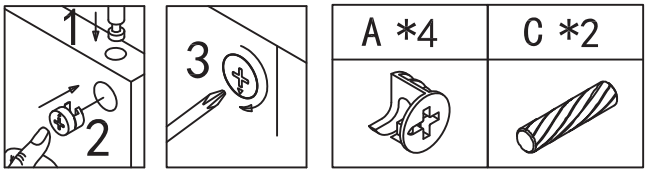


Step 7

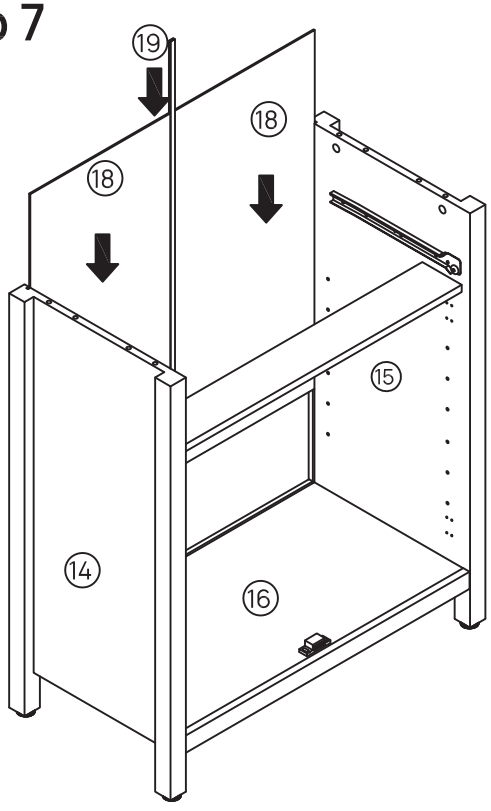


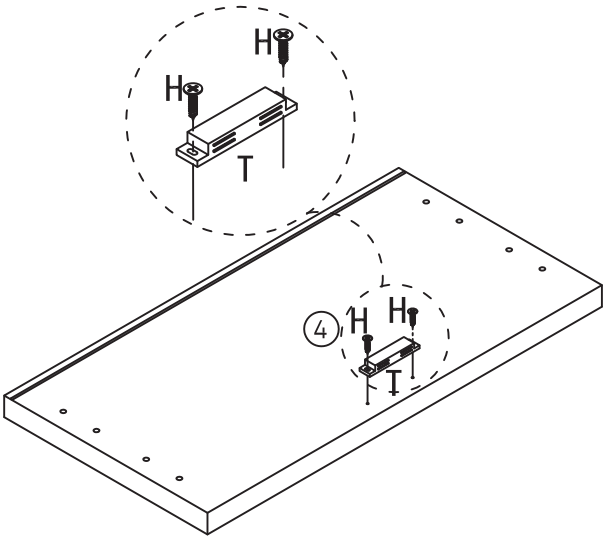





Step 8

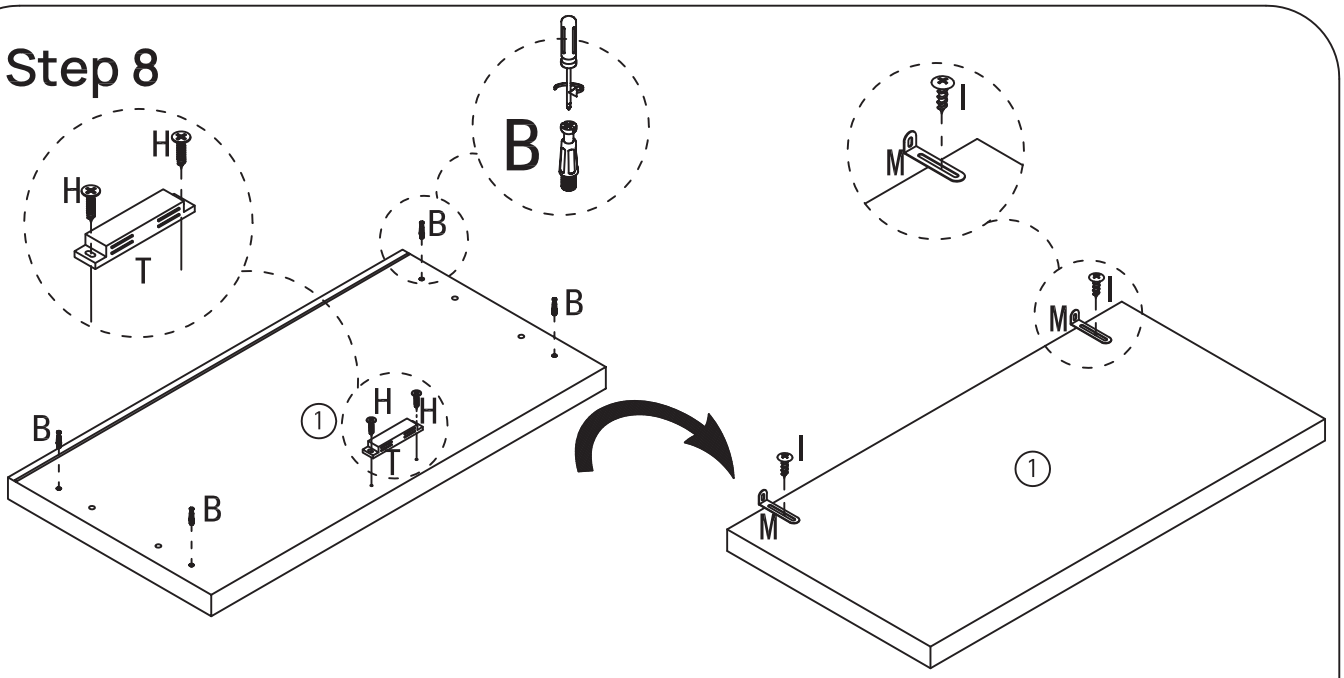




B *4	M *2	I *2	H *2	T *1
				

Step 9

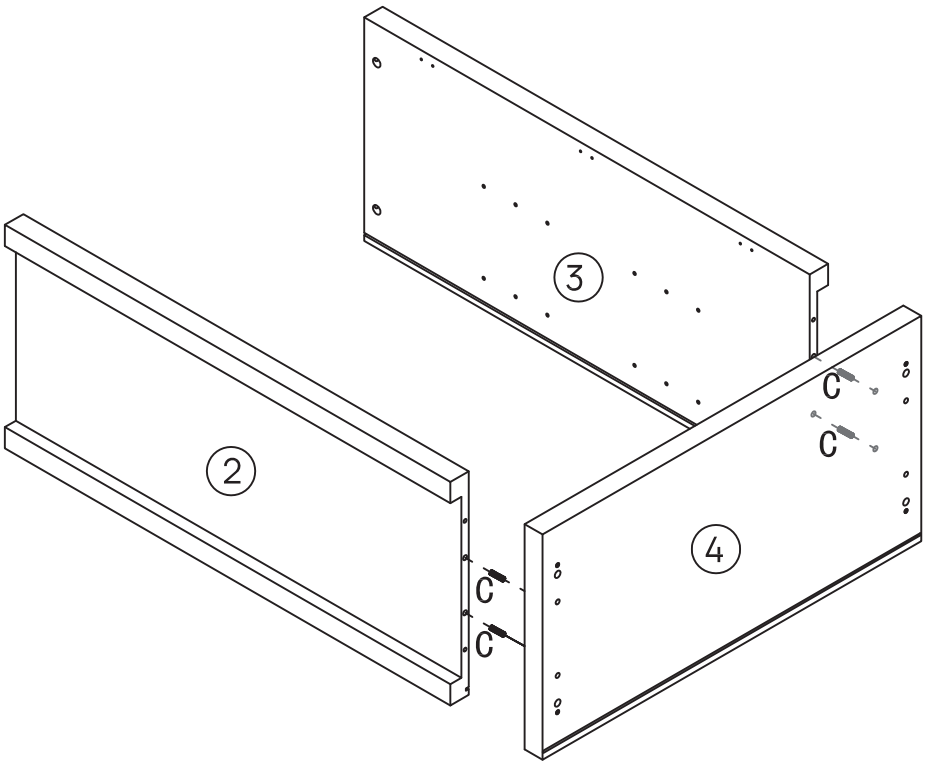


C *4


Step 10

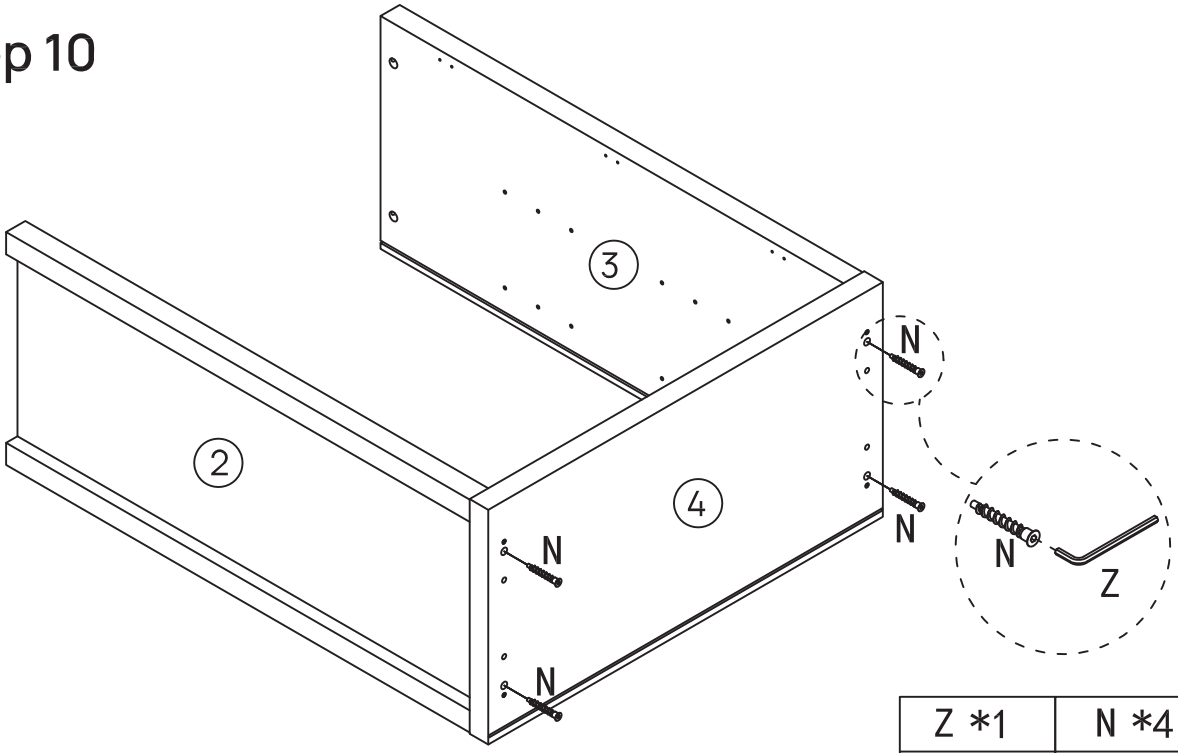



Z *1	N *4
	


Step 11

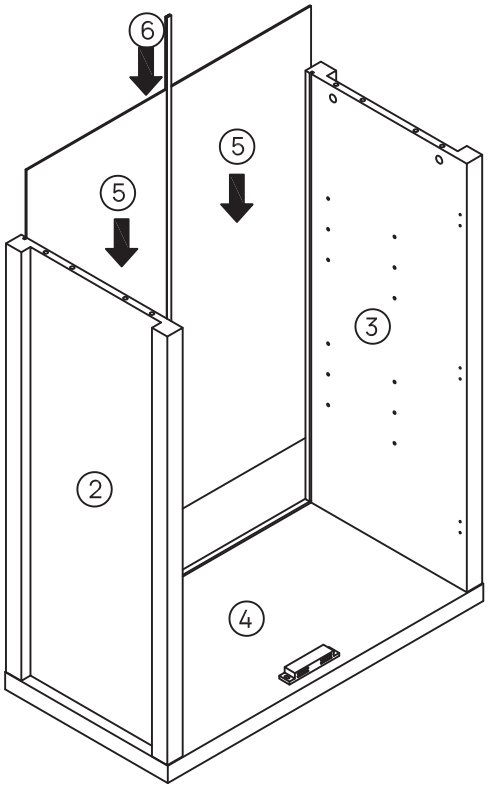


Step 12

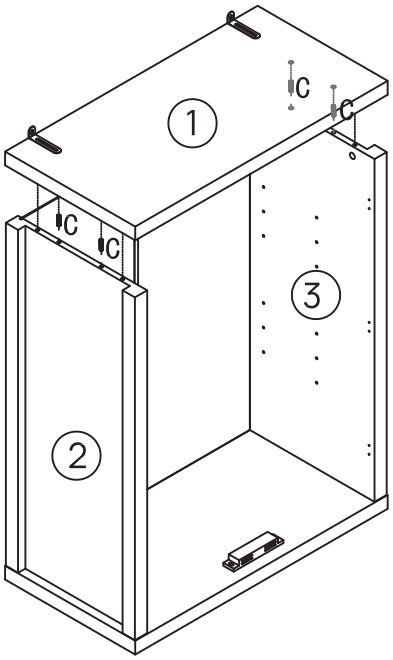

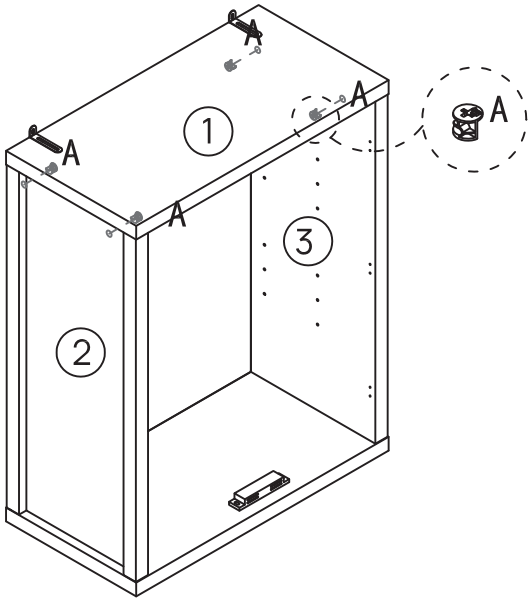


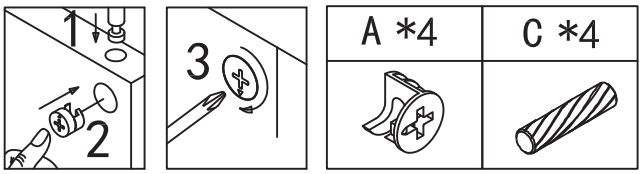


Step 13

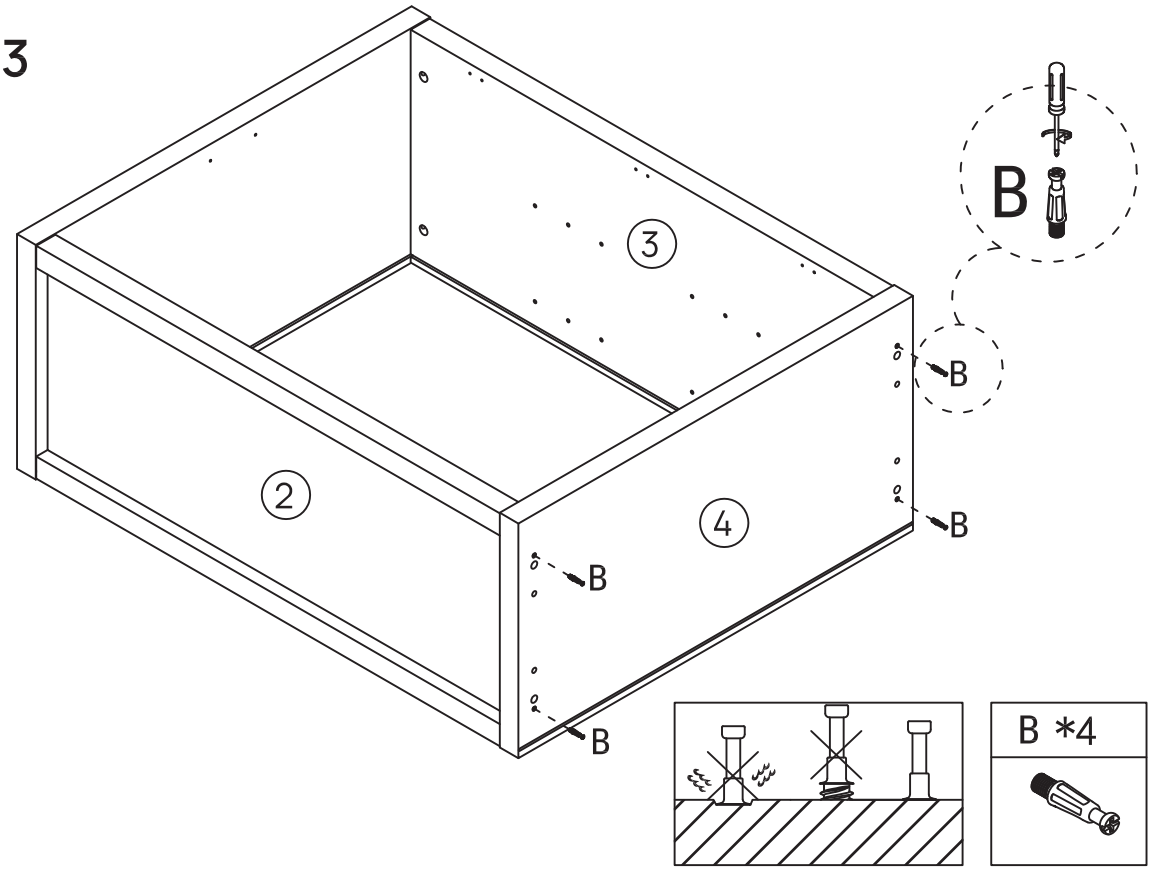


Step 14

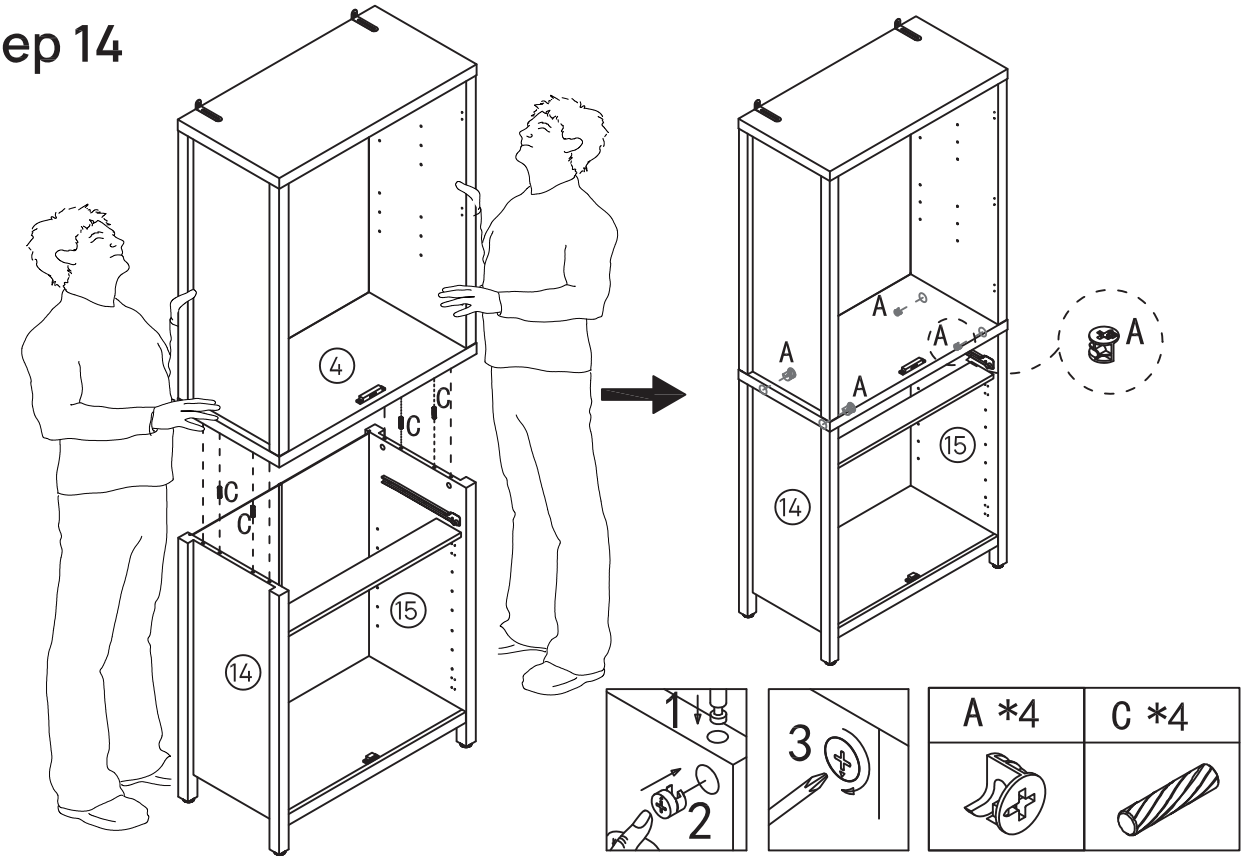

Step 15

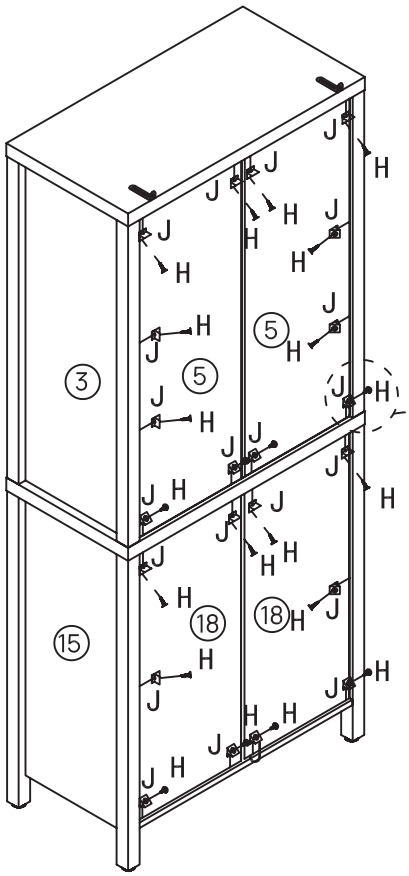


Must Be Installed




J *22	H *22


Step 16

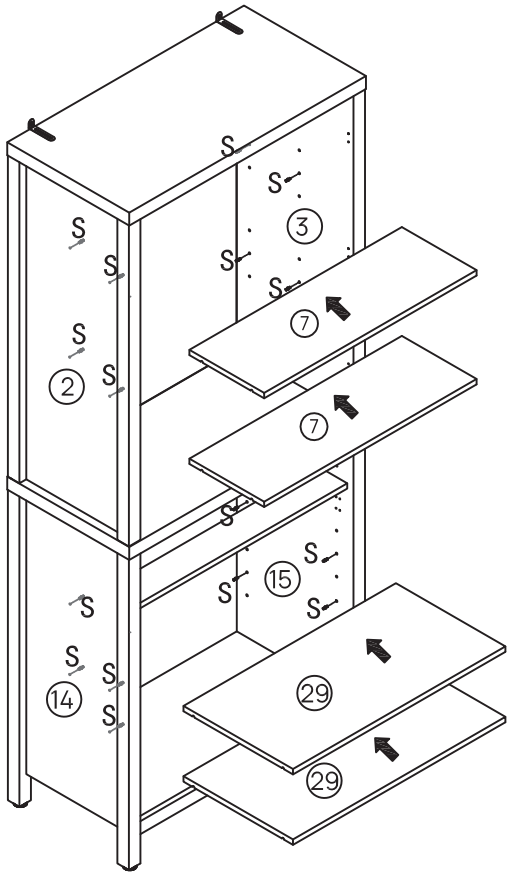

S *16



Step 17

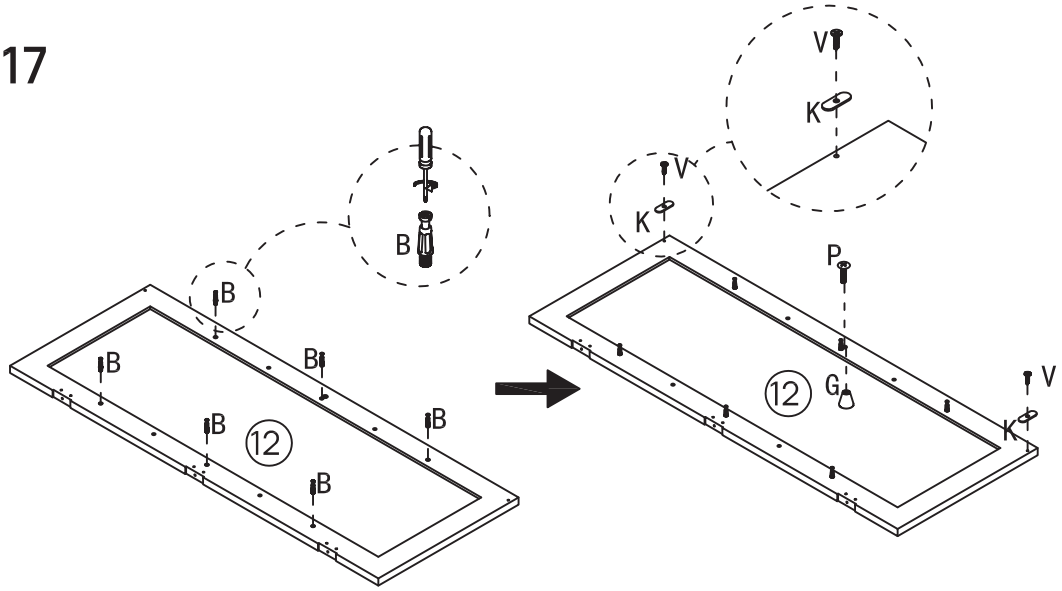




G *1	P *1	B *6	V *2	K *2
				


Step 18

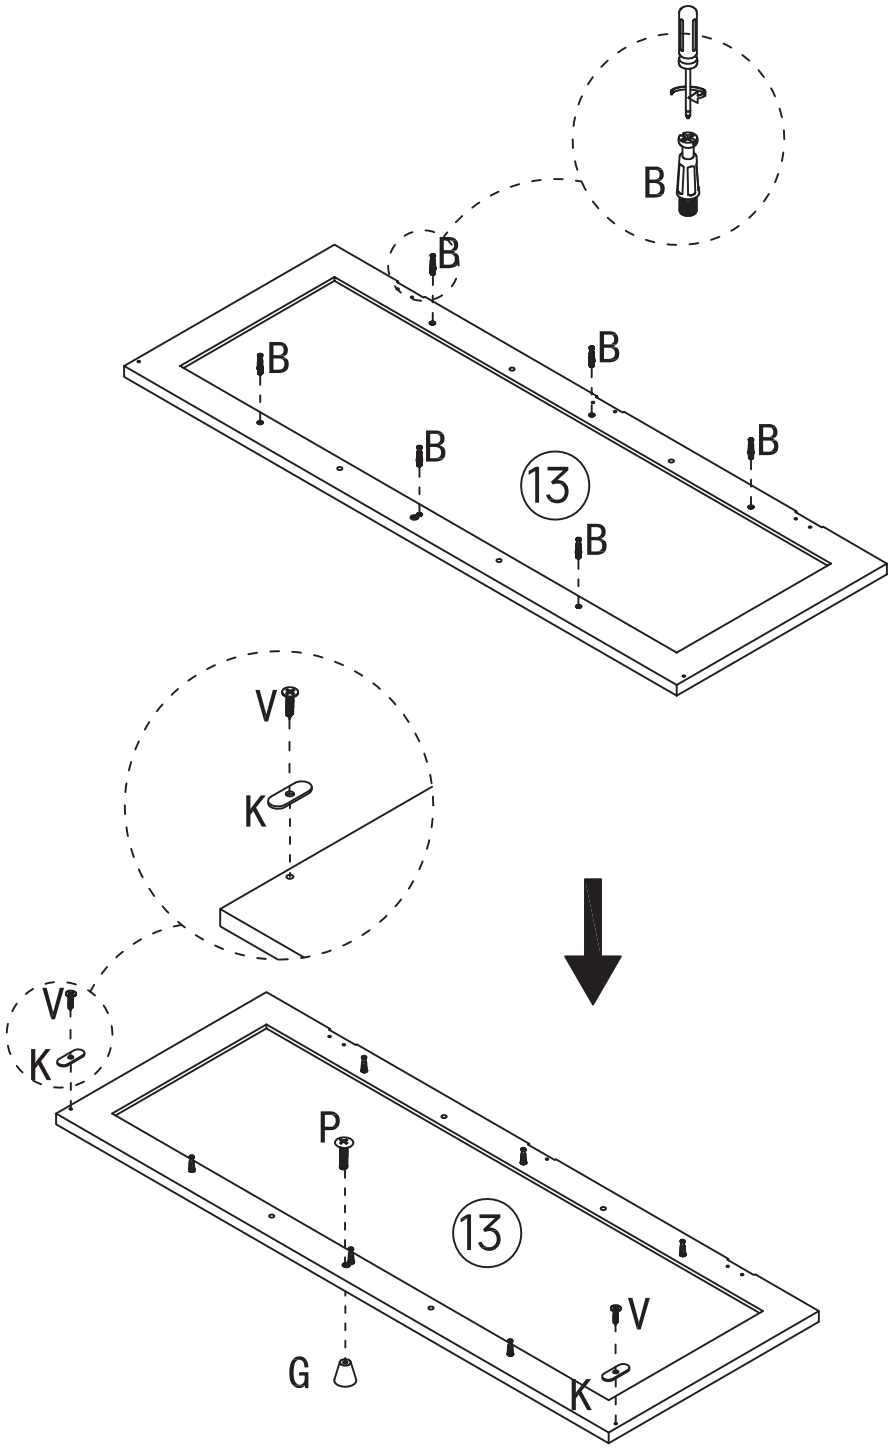



G *1	P *1	B *6	V *2	K *2
				


Step 19

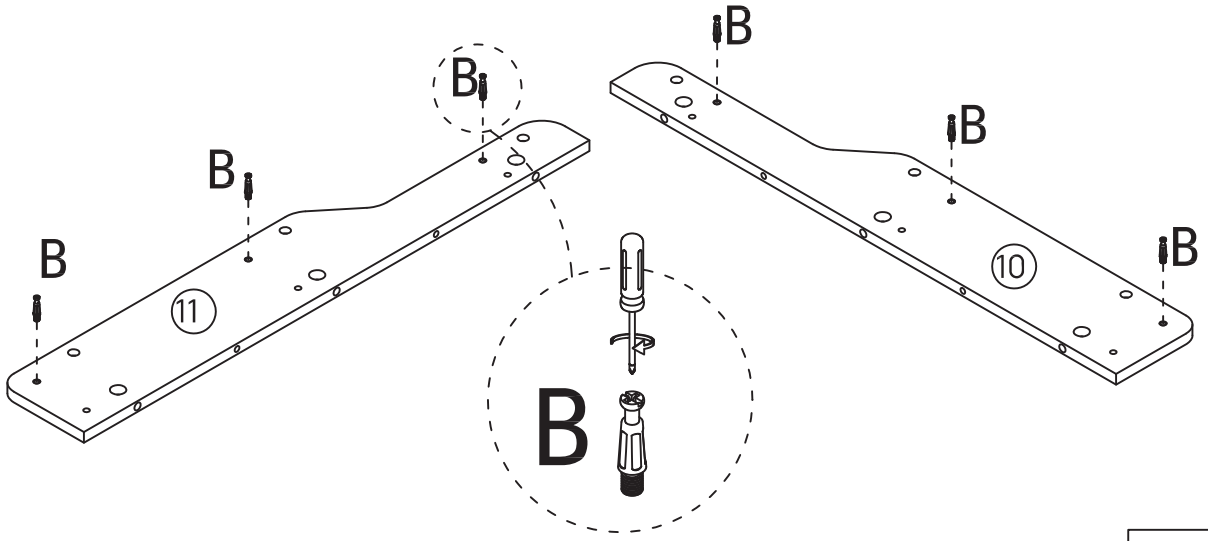


X2


B *12



Step 20

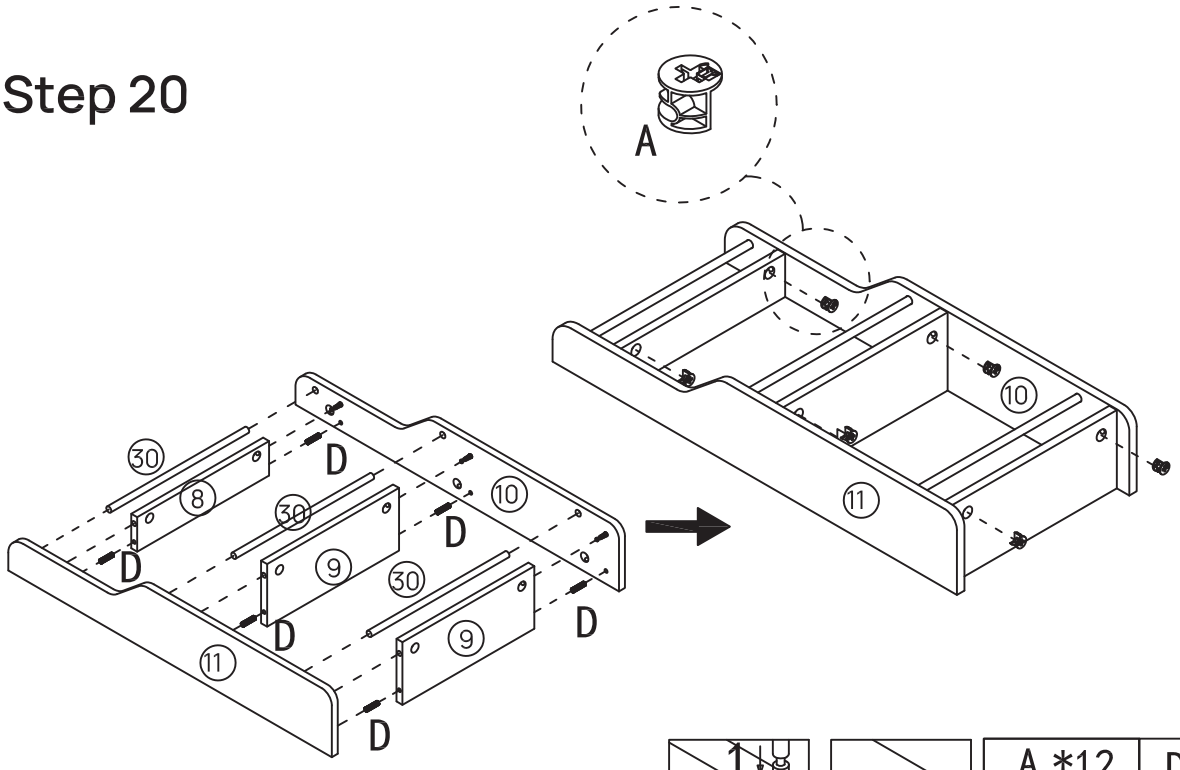


X2






A *12	D *12
	


Step 21

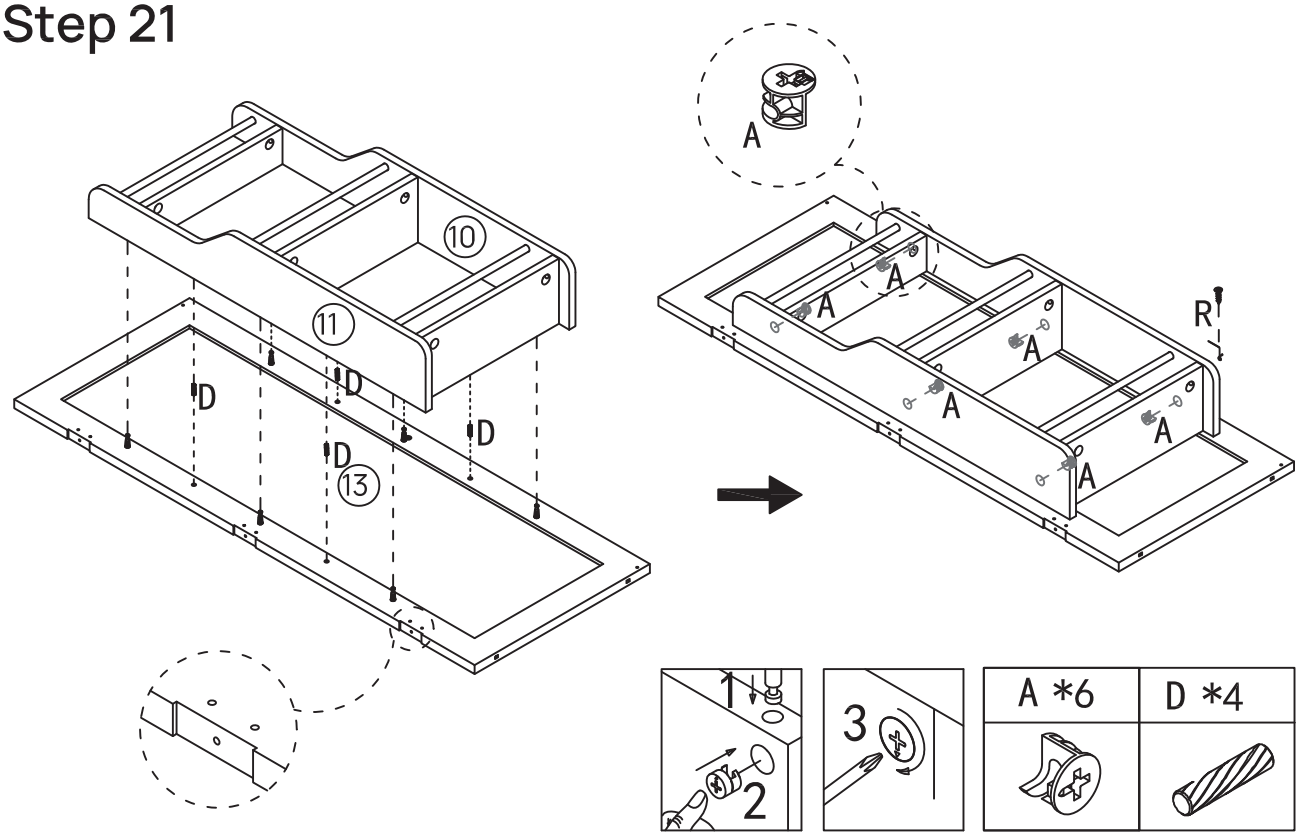


Step 22

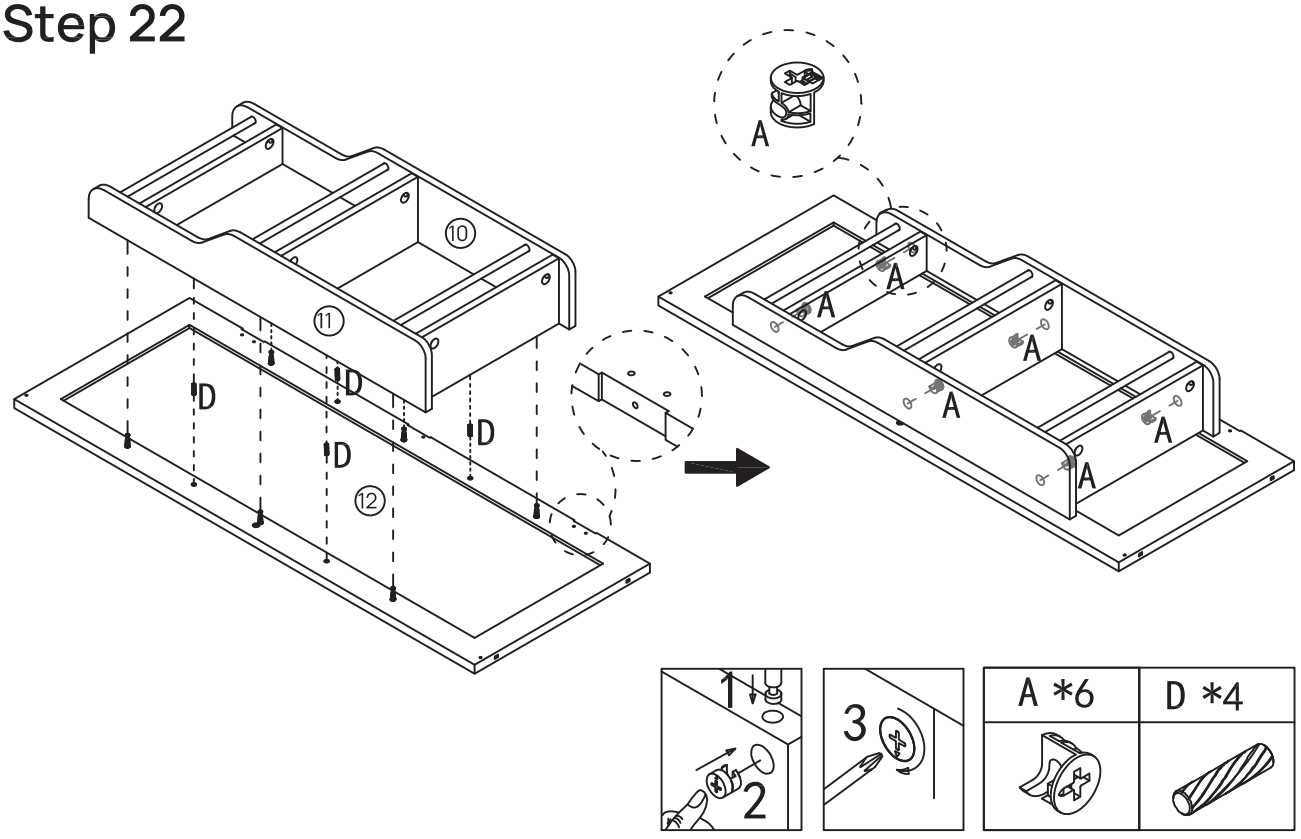


Step 23

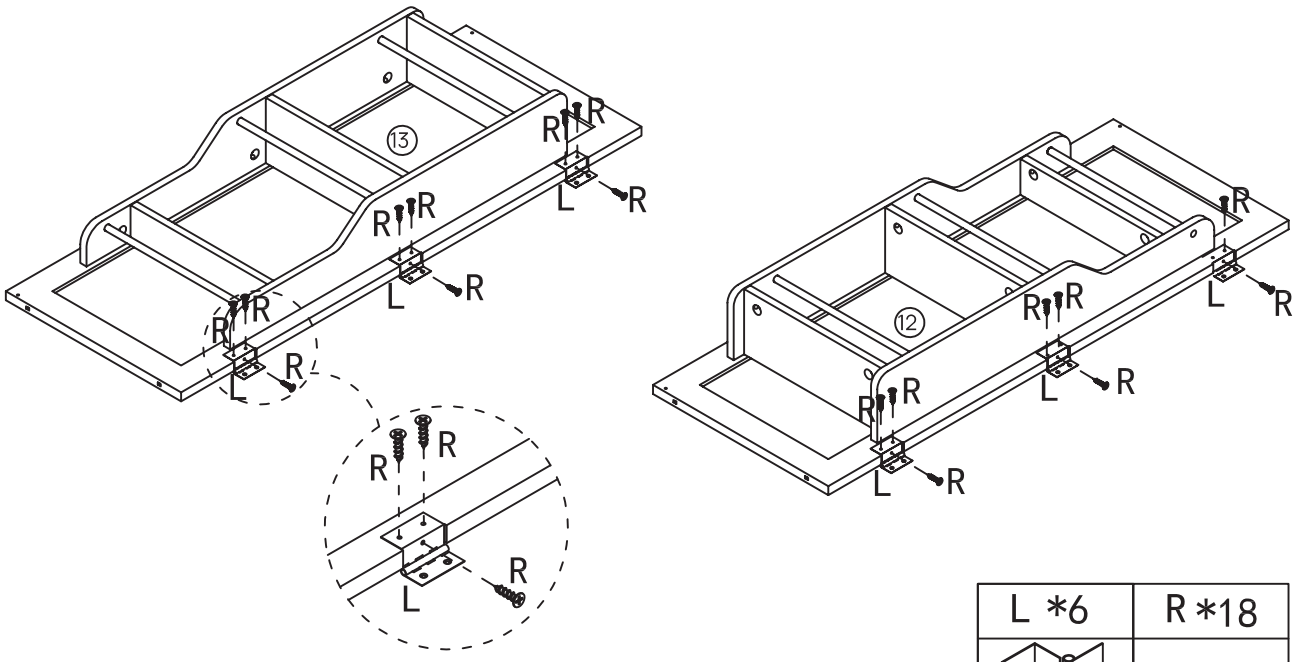


L *6	R *18
	

Step 24

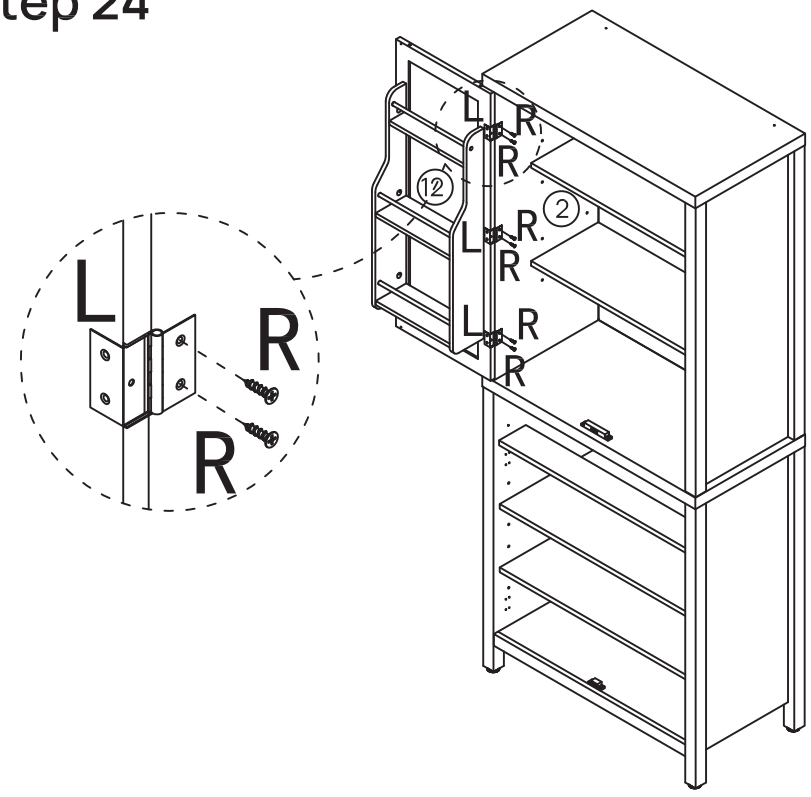


R *6



Step 25

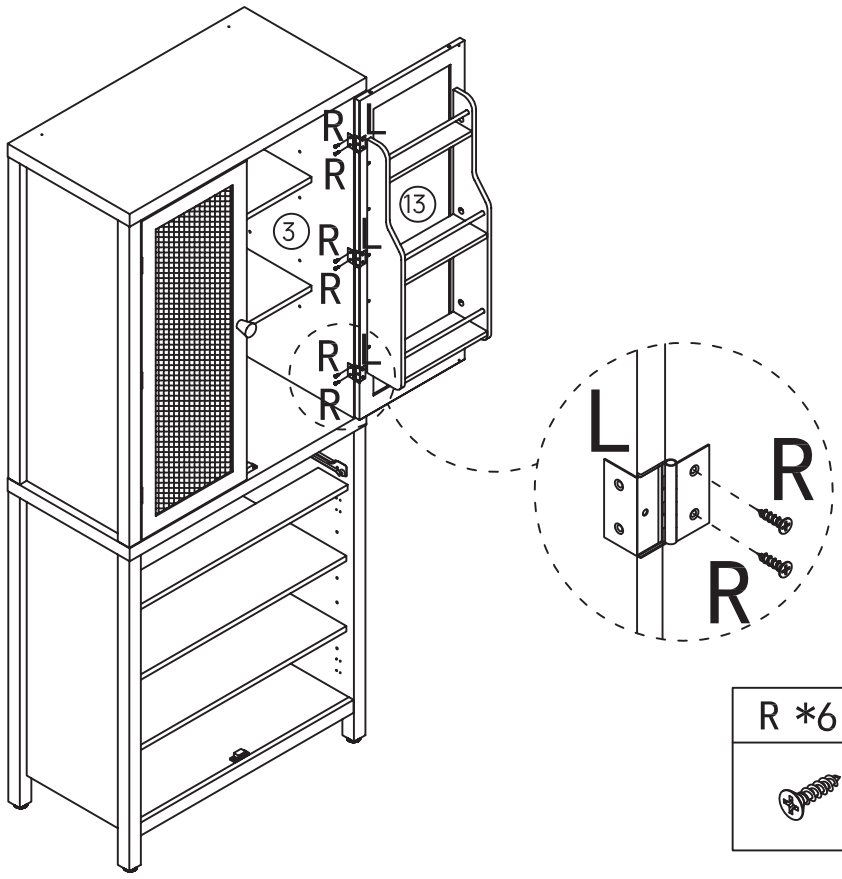

R *6


Step 26

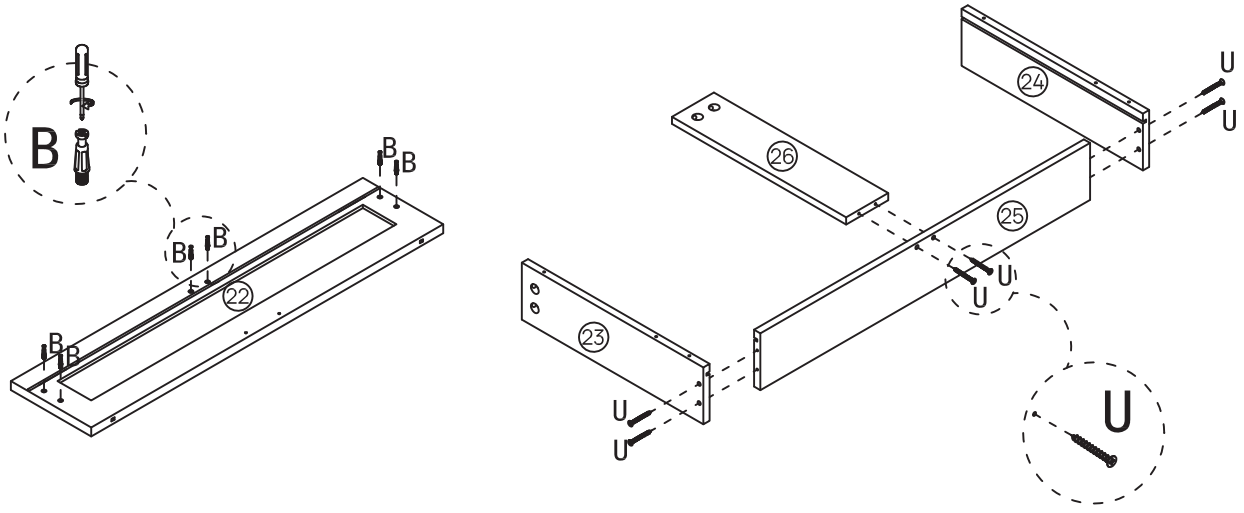





B *6	U *6
	


Step 27

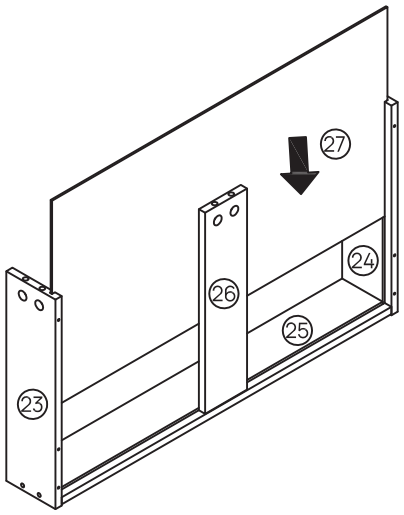


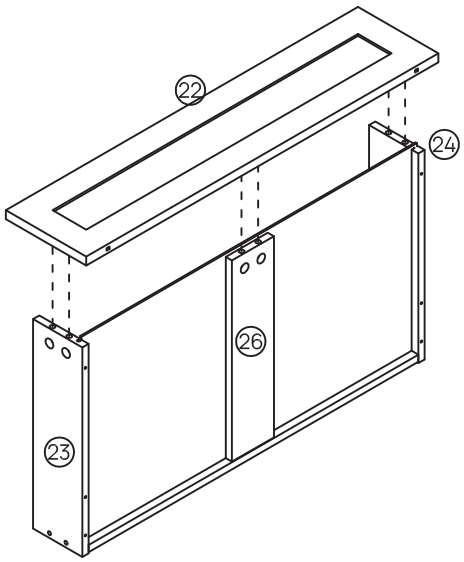




Step 28

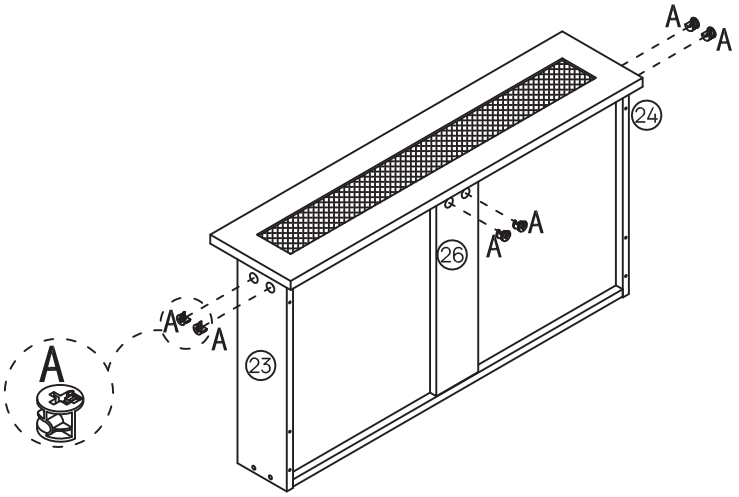

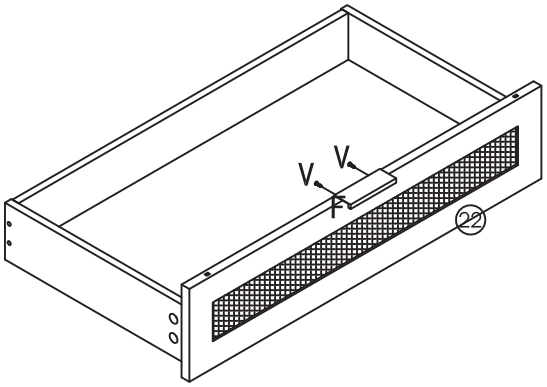







A *6	V *2	F *1
		

Step 29

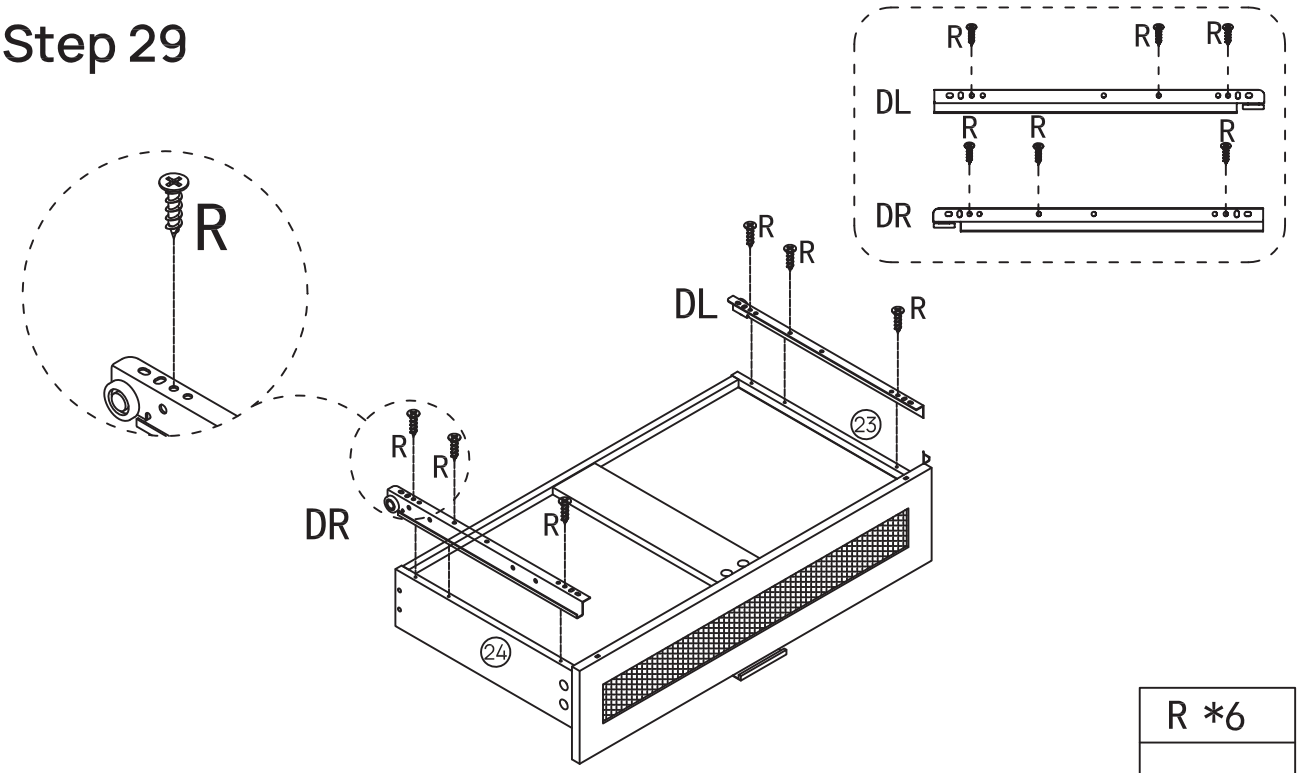


R *6



Step 30

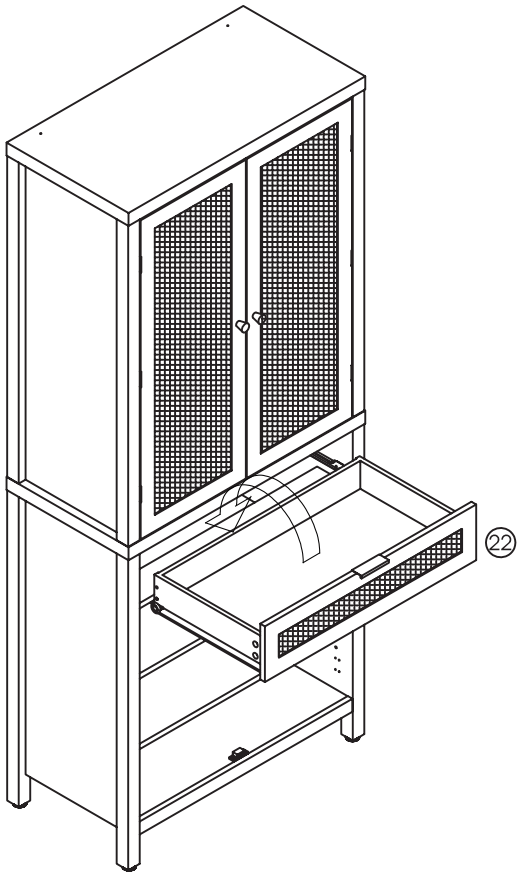

Please note that the drawers must be installed as indicated by the arrows.

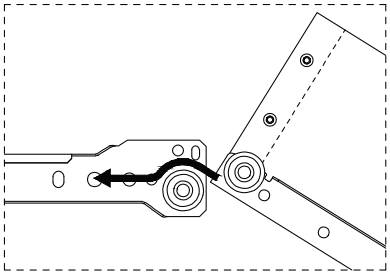



Step 31

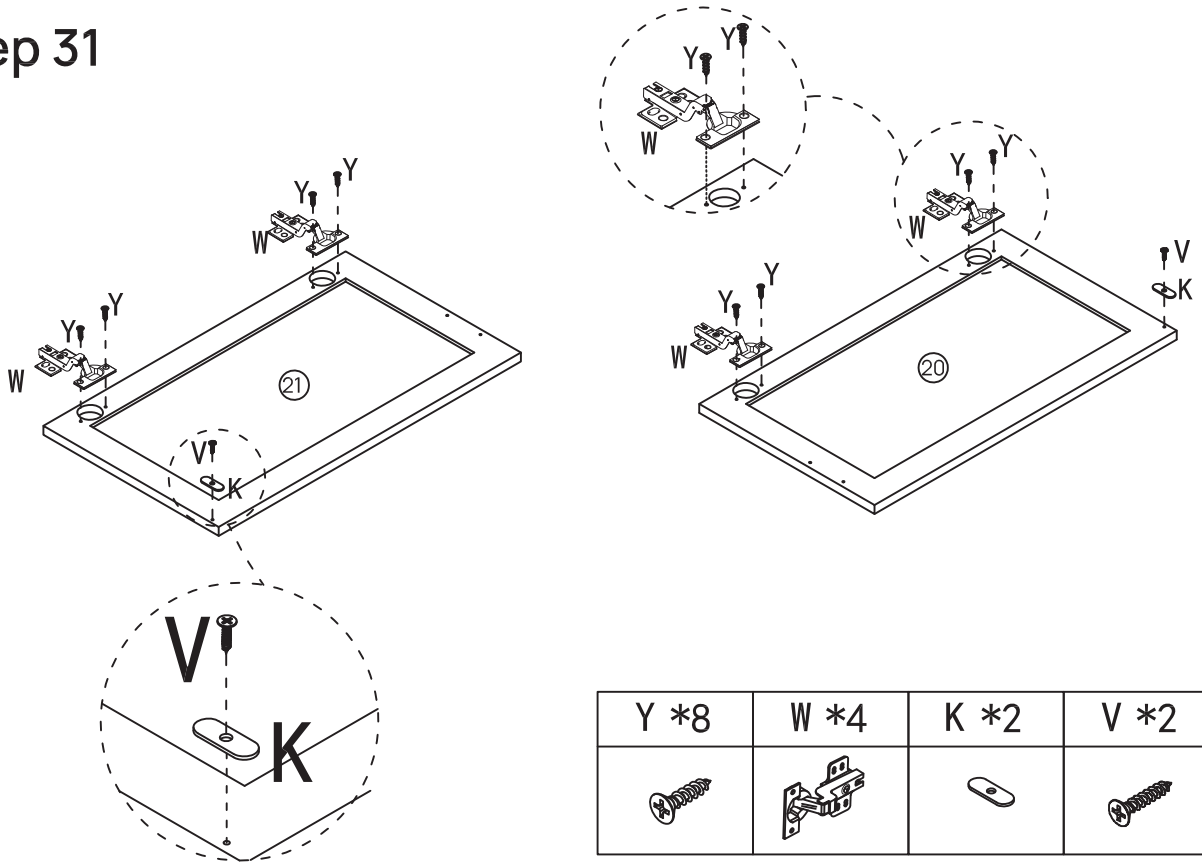

Y *8	W *4	K *2	V *2

Step 32

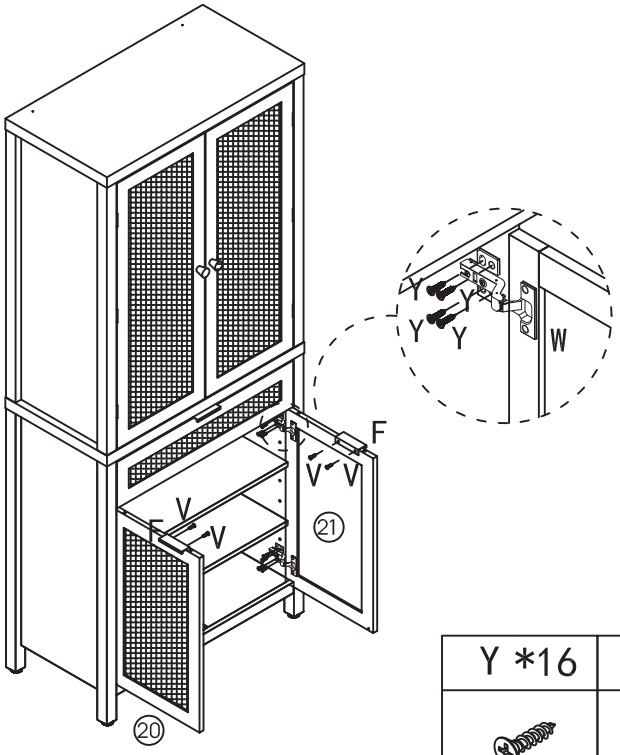


Y *16	V *4	F *2
		

Cabinet Door Adjustment Instructions


Height adjustment:

a) Locate the height adjustment screws on the hinge.
b) Use the Phillips screwdriver to either tighten or loosen the screws to raise or lower the cabinet door as desired.

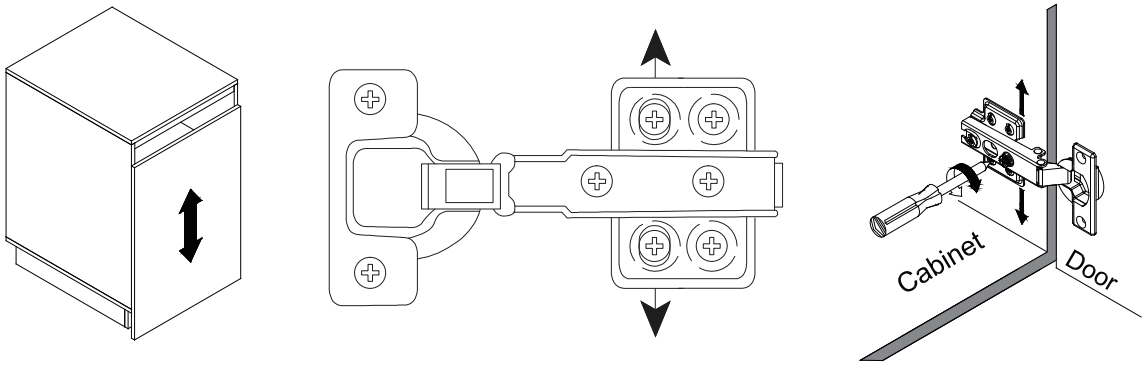


Side-to-side adjustment:


a) If the cabinet door needs to be moved closer to or away from the cabinet frame, locate the side-to-side adjustment screws on the hinge.
b) Use the Phillips screwdriver to adjust these screws and gradually move the door in the desired direction.

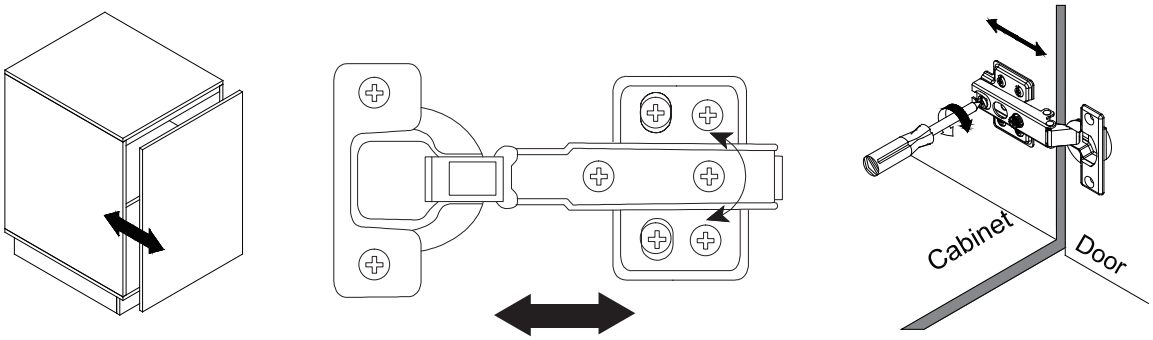

Depth adjustment (if applicable):

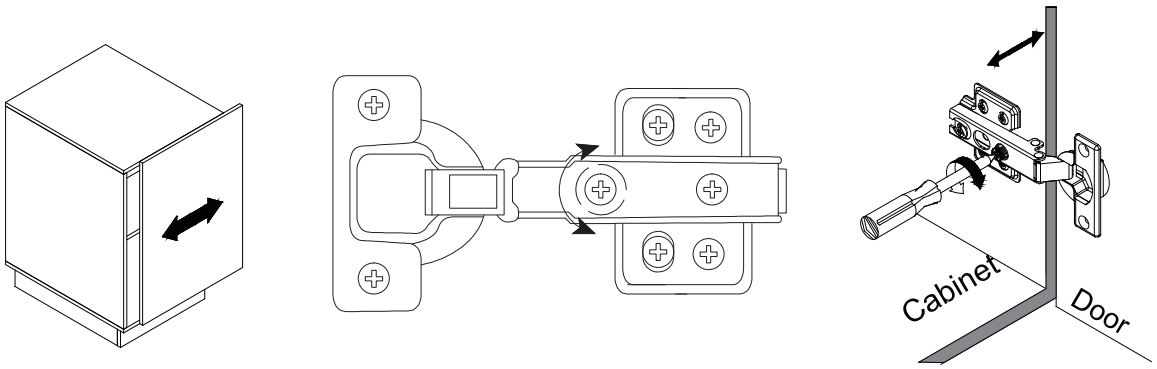


Step 33

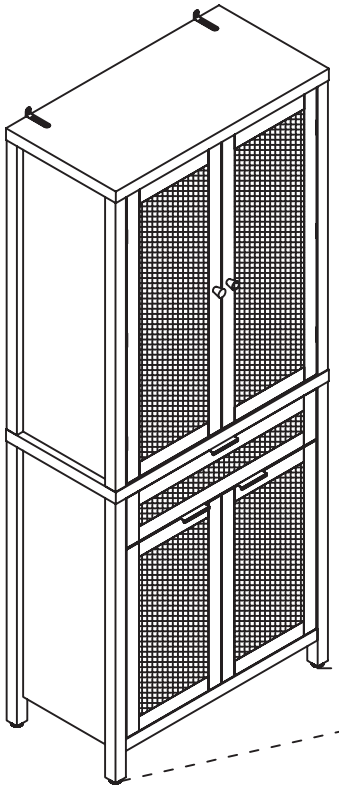



Note:You can adjust the height by rotating it left or right



Step 34

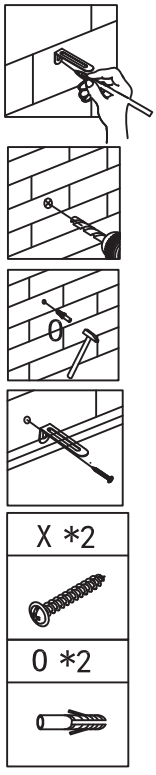

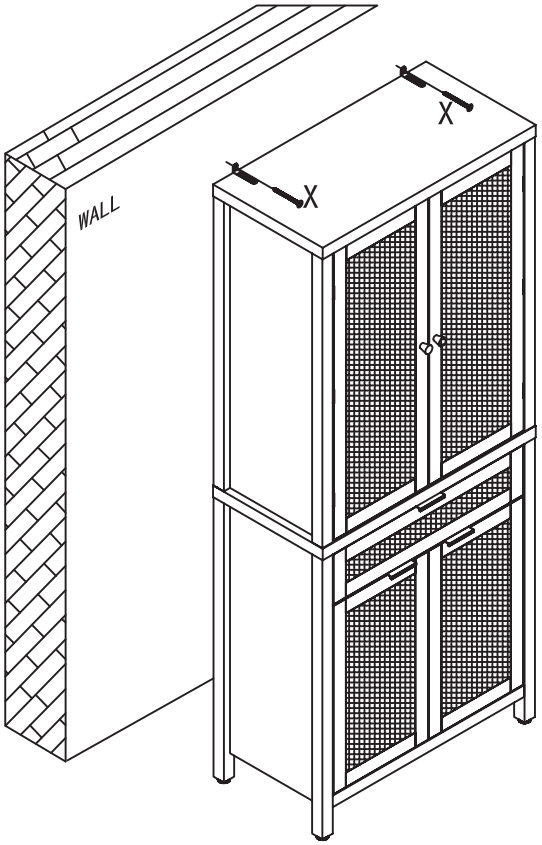



Step 35

