


edishinē

Chandelier

SKU: HCDL10A
[Instruction Manual]

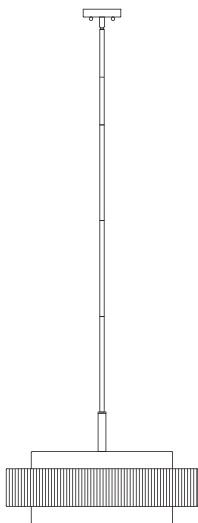

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL





FIG.3 FUSE BOX





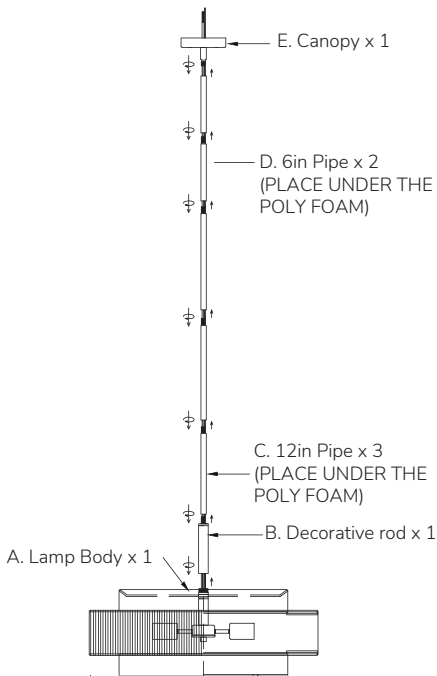


PACKING LIST



1. Thread the wires through the decorative rod (B), tubes (C) and canopy (E). Then tighten the lamp body (A), decorative rod (B), tubes (C) and canopy (E) in sequence.


Note: At least one tube (C) is required to connect decorative rod (B) and canopy (E).

INSTALLATION KIT

AA  Mounting Bracket 1x	BB  Outlet Box Screw 2x	CC  Ground Screw 1x
DD  Wire Nut 3x	EE  Knurled Nut 2x	FF  Light diffuser 1x
GG  Gloves 1x		

1. Knurled Nut (EE), Ground Screw (CC) have been pre-installed on Mounting Bracket (AA).

INSTALLATION

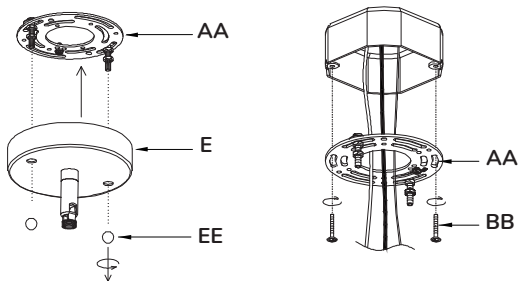


Step 1:

Loosen the Ball Nut(EE) from Canopy (E), and take out the Mounting Bracket (AA).

Step 2:

Take off the screws from the outlet box, and secure the Mounting Bracket (AA) onto the box with the screws taken off or Outlet Box Screw (BB).

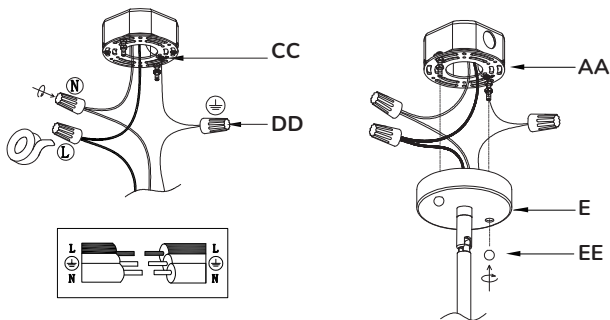**Step 4:**


Connect the wires from the fixture to the house supply wires with Wire Nuts (DD), Wrap the connection with electrical tape.

Step 5:

Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

Step 6:

Fix the Canopy (E) onto the Mounting Bracket (AA) with the Knurled Nut (EE).

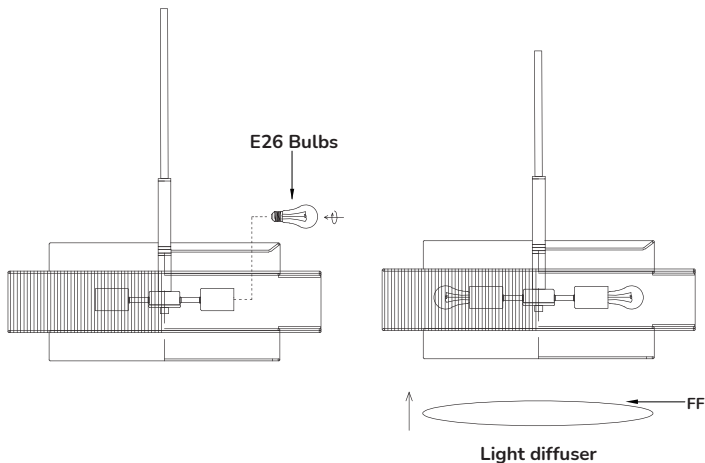

Step 7:

Install the E26 x5 bulbs (Max 60W each, not included).

Step 8:

Attach the light diffuser (FF) to the fixture from underneath the bottom shade.

Light diffuser (PLACE UNDER THE POLY FOAM)

Specifications

- Input Voltage: 120VAC 60Hz
- Max.Load Power: incandescent Bulb 60W
- Socket Type: Standard Medium E26

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China