



Underscore® | K-1121-W1

60" x 30" drop-in bath with Bask® heated surface

Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Customize the heat with three adjustable settings
- Integral lumbar support
- Slotted overflow allows for deep soaking



Available Colors/Finishes

Color tiles intended for reference only.

	0	White
	96	Biscuit
	95	Ice Grey
	7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 20:33 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
ADA
ICC/ANSI A117.1
cUL Listed
UL Listed

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	2" (51 mm)
Basin Area, Bottom:	42-3/8" x 20" (1076 mm x 508 mm)
Basin Area, Top:	54-3/8" x 24-5/16" (1381 mm x 618 mm)
Water Depth:	15-1/16" (383 mm)
Water Capacity:	59.8 gal (226.4 L)
Minimum Floor Load:	50 lbs/ft ²
Weight:	77 lbs (34.9 kg)
Cutout:	Drop-in, 59-1/2" x 28-1/2" (1511 mm x 724 mm)

Material

- Acrylic

Recommended Products/Accessories

- K-531 Undermount kit for select 60" Underscore bath models
- K-1491 Bath/whirlpool pillow, removable
- K-1601 Bath/whirlpool footstop, removable
- K-1177 Tiling-in bead, 144" length
- K-23726 Drain treatment
- K-23732 Tub & shower cleaner

Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated surface: 120 V, 15 A

Electrical Component Ratings

Heated surface: 120 V, 0.5 A, 60 Hz


Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty




No change in measurement if connected with drain illustrated. (K-7272)




Drop-In Rim Detail

Access Panel
20" (508 mm) L x 15" (381 mm) H Min

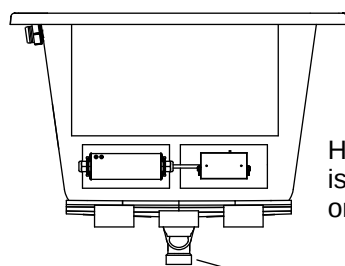

1-1/2" Bath Drain

Heater pad is located on this side

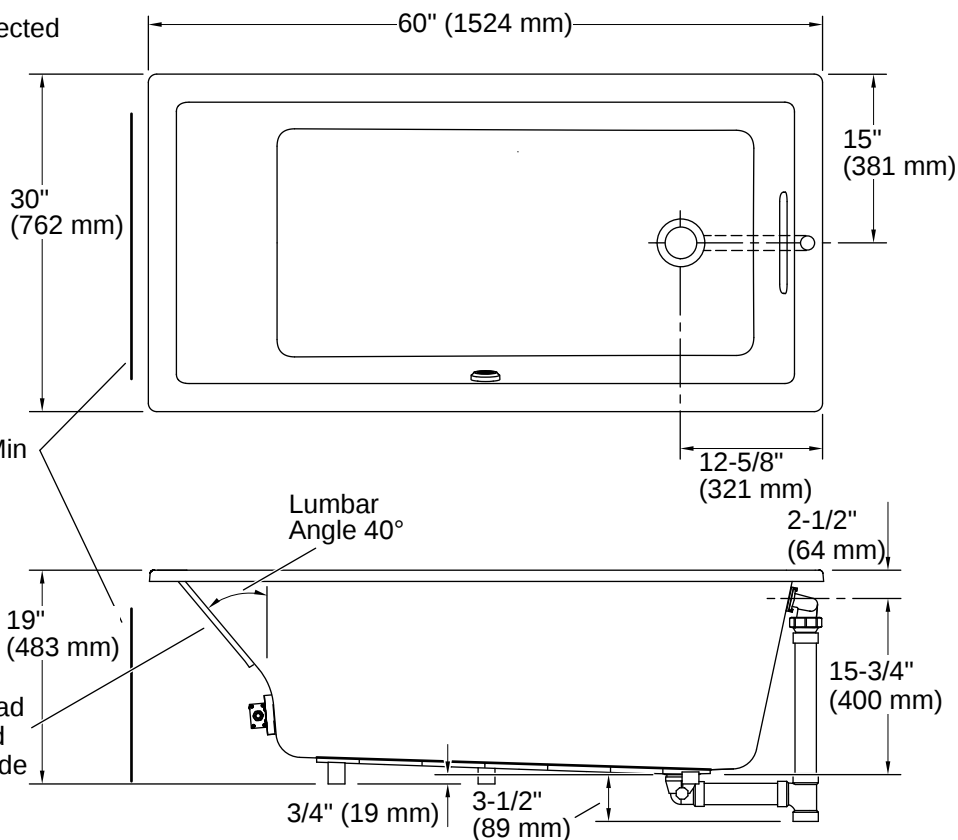

Installation

- Reversible drain
- Drop-in or undermount
- Requires 110 V electrical service
- Requires Clearflo slotted overflow bath drain (sold separately)

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

ADA compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 20:33 - US-CA