Assembly Instructions

Accent Chair



Note


1. Please check the parts list before assembly and read the instructions step by step carefully. Wrong ways might result in incomplete assembly, more seriously, causing personal injury and property damage in the future.
2. Because of the weight of the seat and backrest, sometimes it might be easier to assemble when putting one side of the chair on the ground.
3. In the first five steps, do not fully tighten all the screws.
4. If it's possible please find another person to help you. Using an electric screwdriver would make the assembly much easier.
5. If you have any problems during the assembly that you can't solve on your own, please contact us immediately through platform, we'll reply to you as soon as possible.




Note:Take pillow and hardware out of the seat cushion.

Parts List

A  1PC Backrest	B  1PC Seat	CL  1PC Armrest
CR  1PC Armrest	D  1PC Crosspiece	E  8PCS M8X40mm
F  2PCS M8X20mm	G  2PCS M8X60mm	H  1PC Allen Key M6
I  1PC Pillow	J  1PC Allen Key M4	K  1PC Pillow Cover

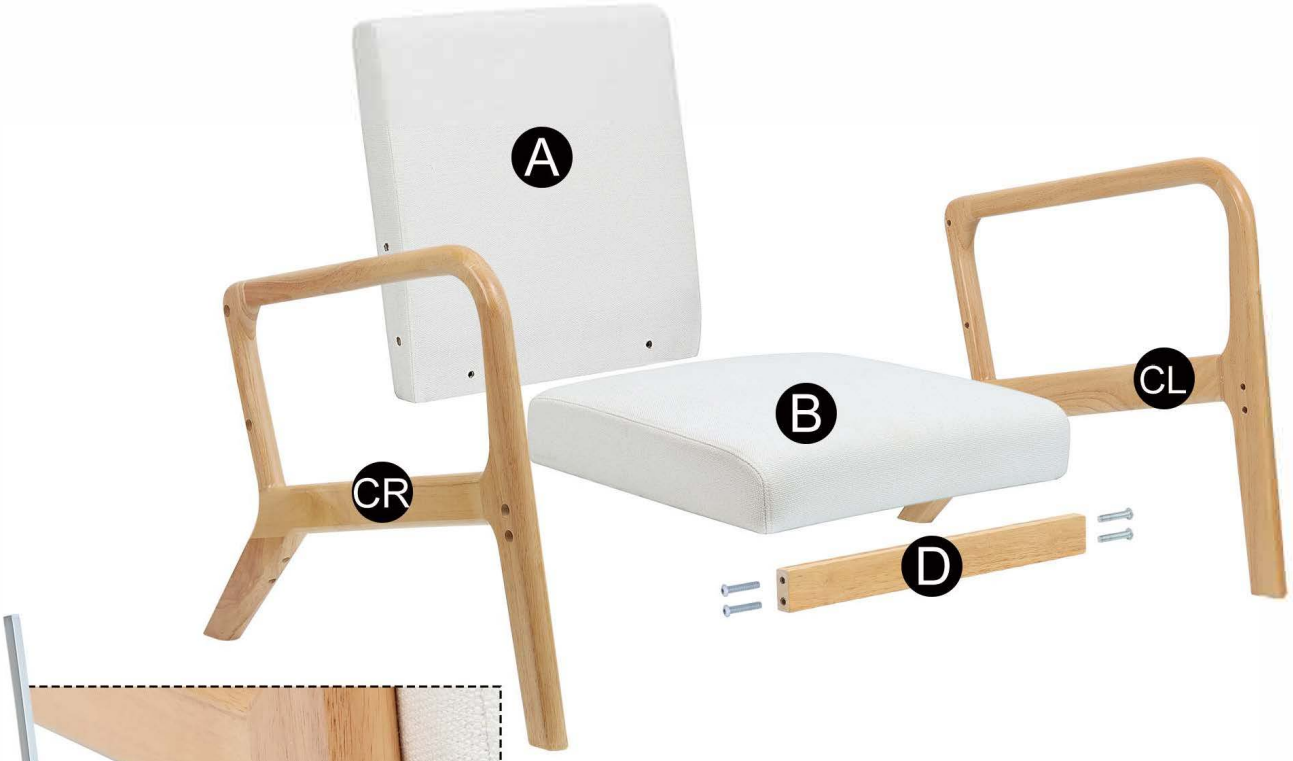


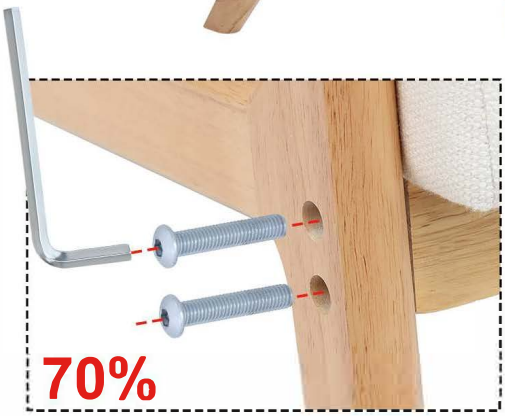

*Please secure all the screws by **70%** before completely level the chair.

STEP 1




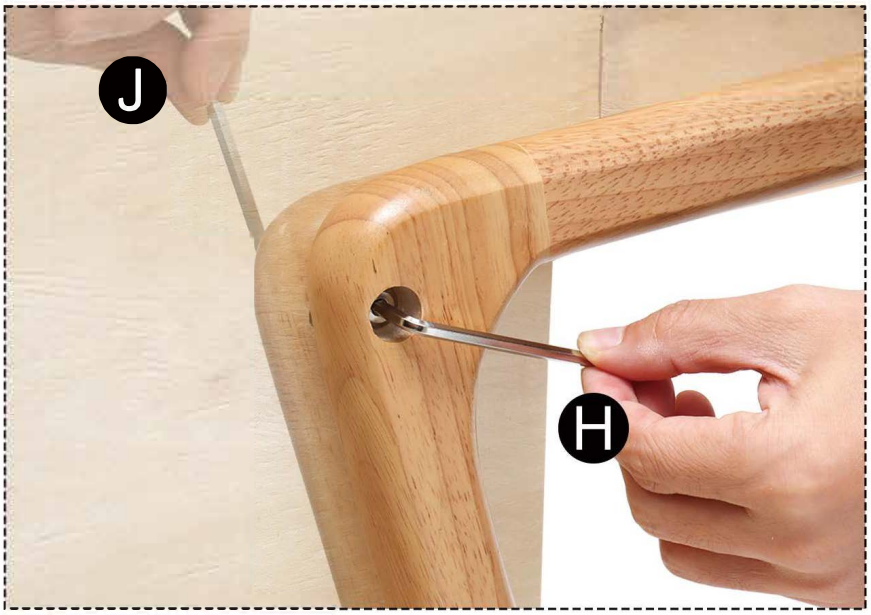

Important!

Here you need to use hex key H and J. With a hex key to fix one side, the other side unscrew the bolts.


STEP2

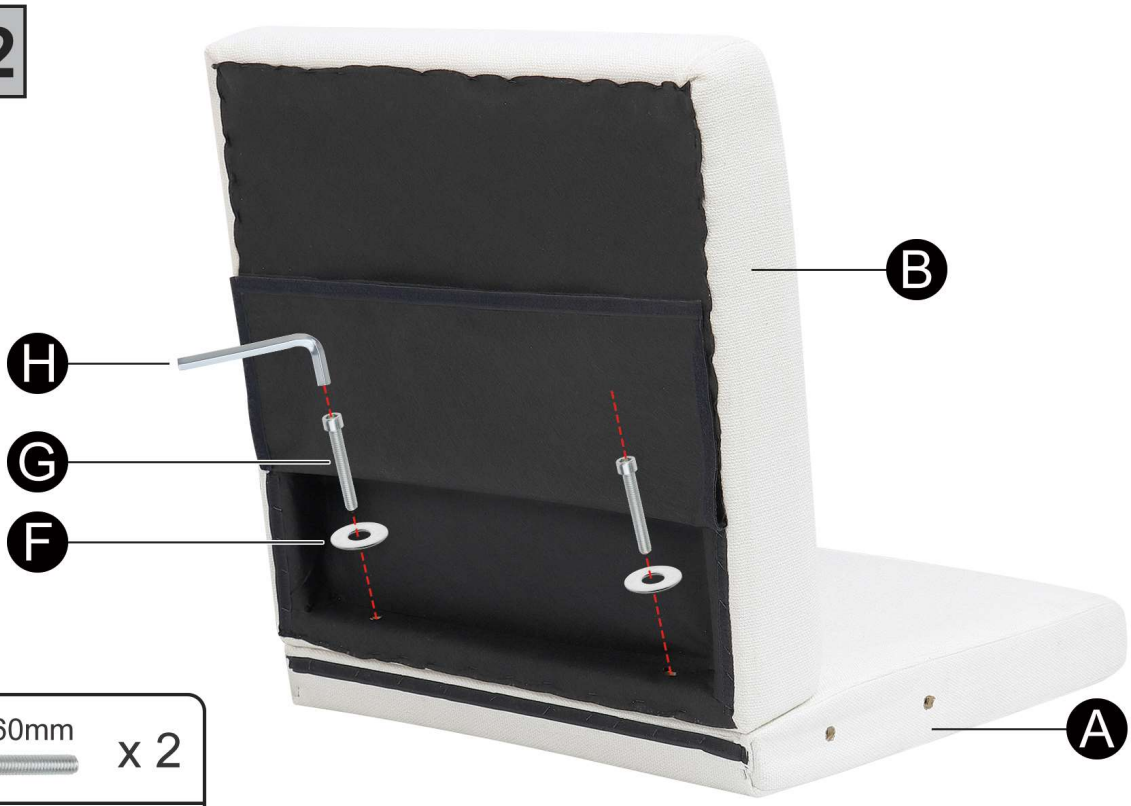

G	M8 x 60mm	x 2
F		x 2
H		x 1

*Uncover the black cloth on bottom of Seat [B], then connect Seat [B]and backrest [A] with Screw [E], Flat Washer [F] by Allen Wrench [H].


STEP3

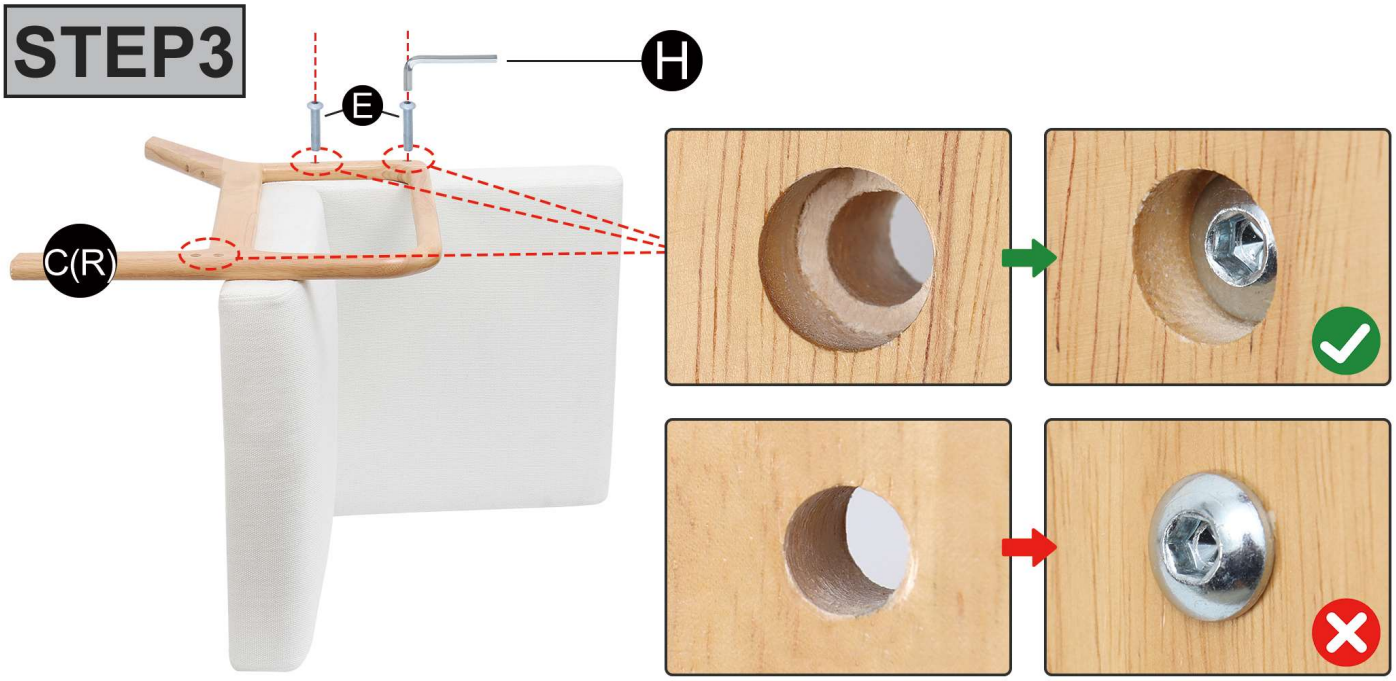

E	M8 x 40mm	x 2
H		x 1

*Connect Left armrest [C(R)] to the Seat [B] and Backrest [A] with Screw [E] and tighten them by 70%.


STEP4

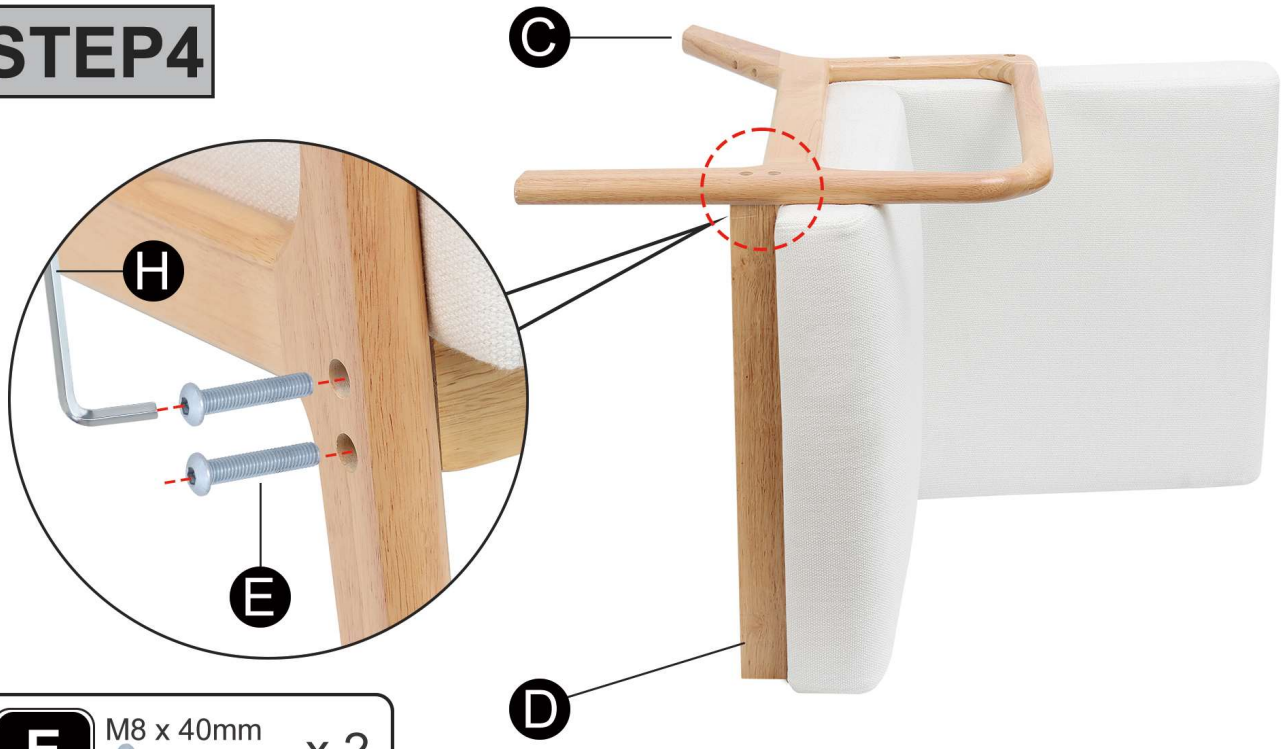

E	M8 x 40mm	x 2
H		x 1
D		x 1

*Connect Crosspiece [D] to Left armrest [C](Note: Larger holes outward) with 2PCS Screw [E] and tighten them by 70%.Prod the nut inside the Crosspiece [D] to make sure they are aligned before Screwing it.

STEP5

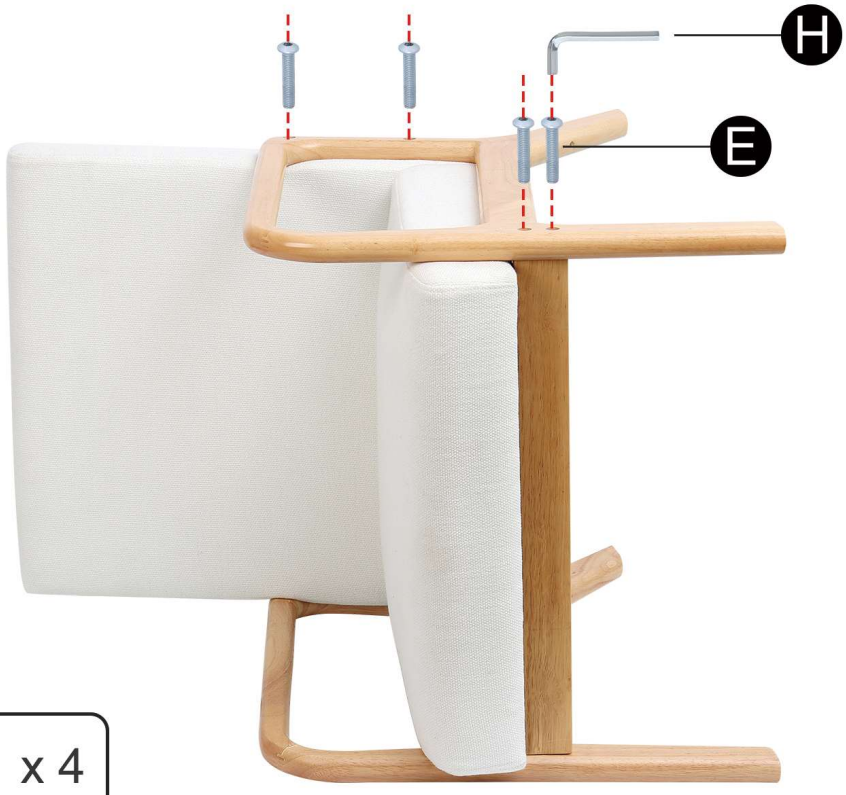


E	M8 x 40mm	x 4
H		x 1

*Likewise,assemble the Right Armrest [C(L)] with 4PCS Screw [E] by Allen Wrench [H] and tighten them by **70%**.

STEP6



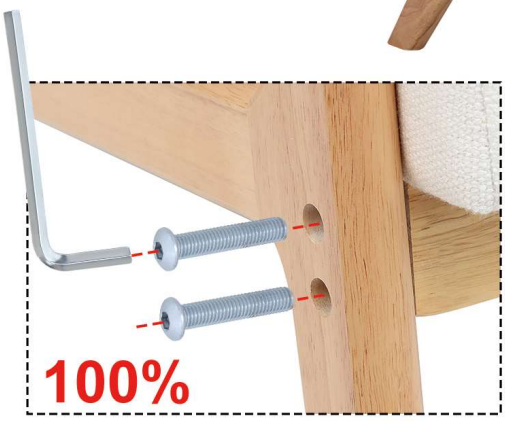

*Sit on the chair softly (with 70% weight) on the floor to level the seat. Then tighten all the screws by **100%.**

