


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: To reduce the risk of electric shock, turn off power at the circuit breaker or fuse box before installing, servicing, or cleaning this fixture.
If you are not familiar with electrical wiring, we recommend hiring a qualified electrician.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions for reference.
3. Turn off power and allow the bulbs and fixture to cool for at least 10 minutes before replacing the bulbs.


2-LIGHT OUTDOOR WALL SCONCE

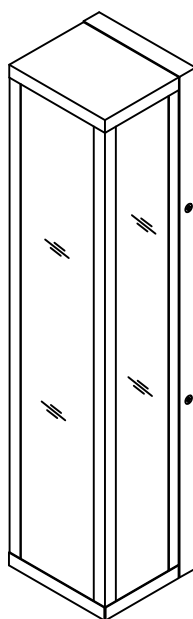


TOOLS REQUIRED




Flathead
Screwdriver




Phillips
Screwdriver



Ladder



Wire Strippers



Pliers



Electrical
Tape



Wire Cutters



Safety Glasses

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Keep all packaging materials until installation is complete to ensure no parts are left in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Wall anchor	2
C	Mounting plate	1
D	Wood screw	2
E	Green ground screw	1
F	Outlet box screw	2
G	Mounting screw	4
H	Fixture body	1
I	Decorative frame	1
J	Decorative Nut	1

INSTALLATION

1. Turn off the power at the circuit breaker before installation.
2. Attach the mounting plate (C) to the junction box using the junction box screws (F). If additional support is needed, install the wall anchors (B), then secure the mounting plate with the wood screws (D).
3. Connect the supply ground wire, usually green or bare copper, to the fixture ground wire and secure it with the green ground screw (E).
4. Connect the black supply wire, Hot/Live, to the fixture black wire. Connect the white supply wire, Neutral, to the fixture white wire. Secure all wire connections with wire nuts (A).
5. Attach the fixture body (H) to the mounting plate (C) using the mounting screws (G).
6. Install two E26 bulbs, maximum 60W each. Bulbs are not included. Do not exceed the maximum wattage.
7. Hang the upper end of the decorative frame (I) onto the upper bracket of the fixture body (H). Align the lower hole with the threaded hole on the fixture body, then secure it with the decorative nut (J).

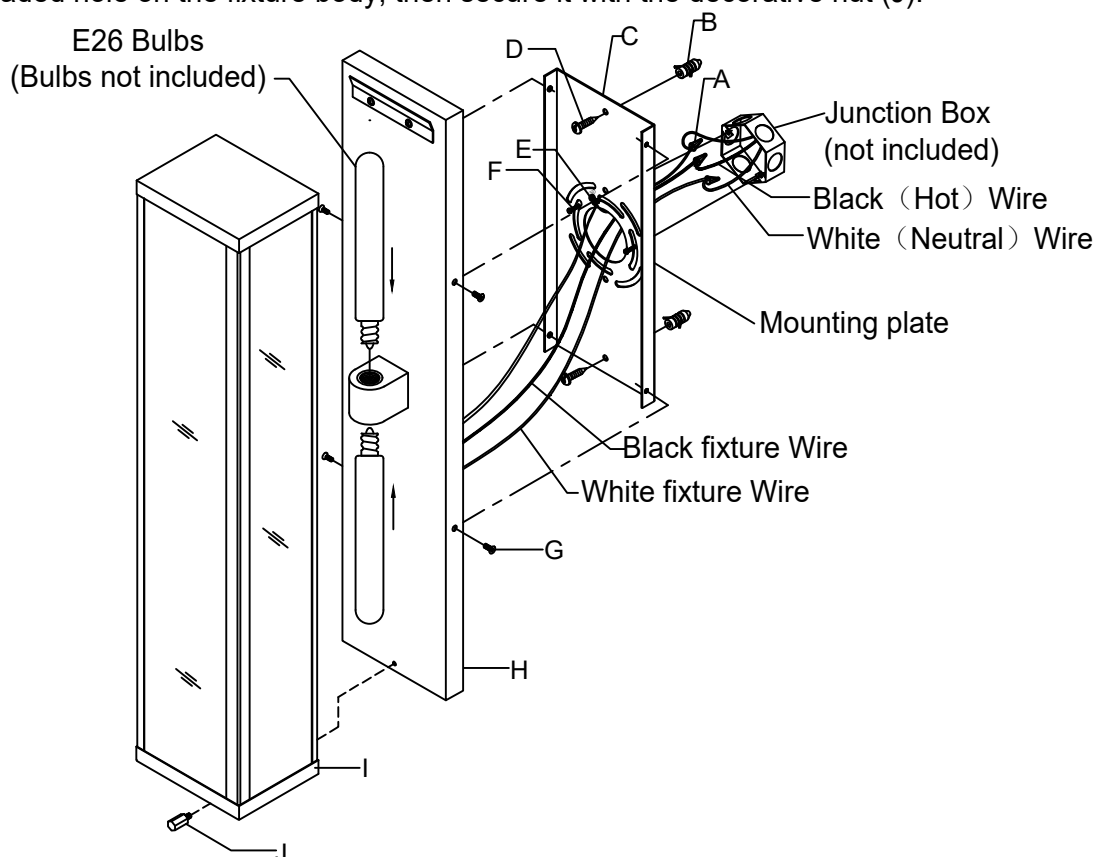

Questions, problems, or missing parts?

Before returning the product, please contact our Customer Support team. We are here to help 24/7.

Please include your order number and photos of the issue for faster assistance.