


LED Outdoor

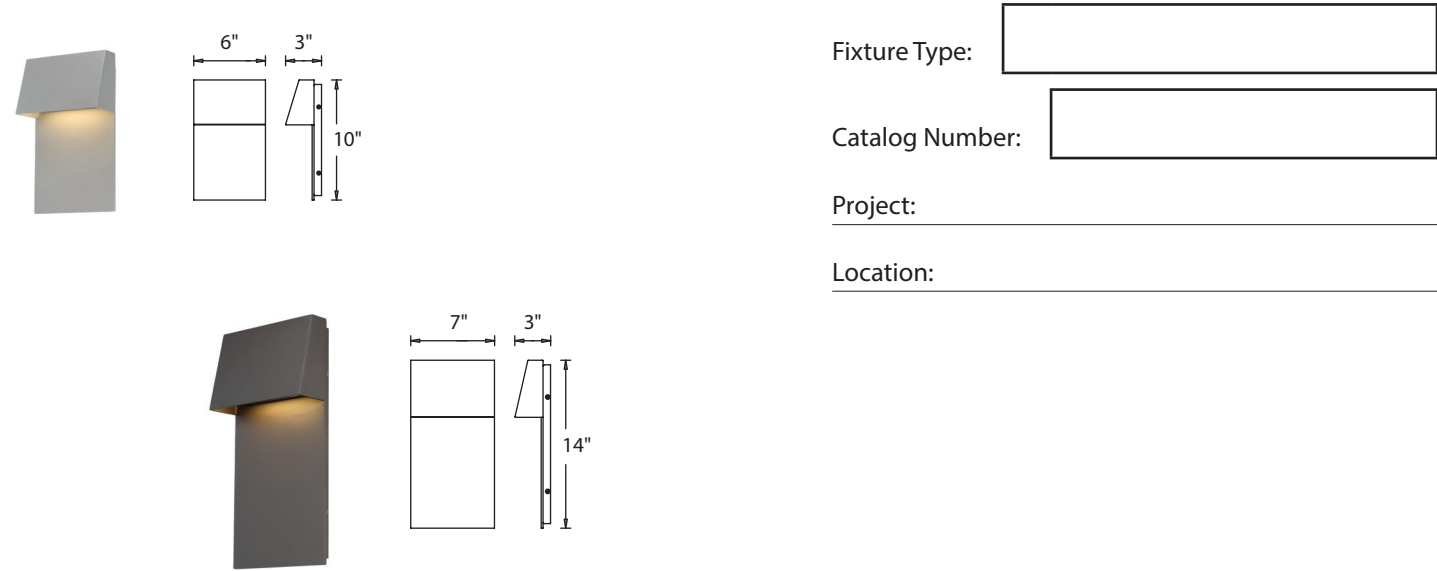

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Feverently passionate with a dash of solemn restraint. This collection features a hood that provides excellent glare cut-off for a discrete but functional downlight illumination. Constructed with a solid die cast aluminum and powder coated finish. The light engine is factory sealed for maximum protection against the harshest elements.

FEATURES

- Front hood provides excellent cut off for a discrete but functional path light
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- No transformer or driver required
- Color Temp: 3000K
- CRI: 90
- Dimming: 100% - 5% ELV
- Rated Life: 44,000 hours
- Input: 120V (277V special order)

SPECIFICATIONS

- Construction:** Aluminum and White Diffuser Lens
- Light Source:** High output LED.
- Finish:** Bronze (BZ), Graphite (GH)
- Standards:** ETL & cETL wet location listed. IP 65. CEC Title 24. Dark Sky Friendly.

ORDER NUMBER

	Watt	LED Lumens	Delivered Lumens	Finish	
10"	9.5W	700	330	BZ	Bronze
14"	12W	840	365	GH	Graphite

For 277V, add an "F" before the finish