USER GUIDE-LED LIGHTED MIRROR










IMPORTANT

PLEASE READ THE INSTRUCTIONS BEFORE SET UP AND INSTALLATION

COMPONENT PARTS AND FITTINGS

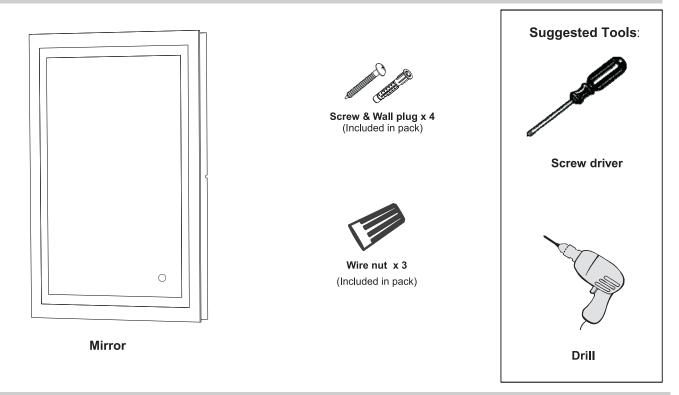

Safety Warning

Safety


- We suggest you spend a short time reading the instruction leaflet.
- Carefully check that you have all the parts before beginning assembly.
- Keep small parts and fittings out of children's reach and keep children well away from construction area, as the unassembled product contains small parts, which could present a choking hazard.
- We suggest you retain these instructions for future reference.
- This appliance can be used by adults ONLY.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.


Caution

- In order to avoid overheating, do not cover the mirror.
- Switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation
- Make sure that there is no danger that the cord or extension cord is inadvertently be pulled or cause anyone to trip when in use.


Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete.


Please note that each part has been assigned a number and proceed in a numerical order.

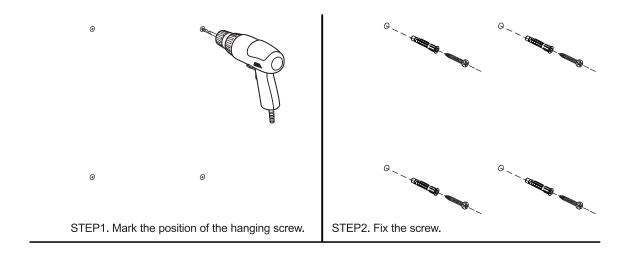

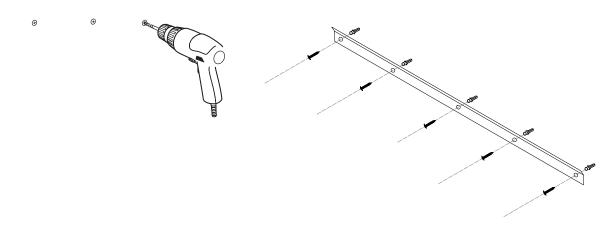



STEP3. Connect to the main supply





STEP4. Hang up the Mirror on the wall

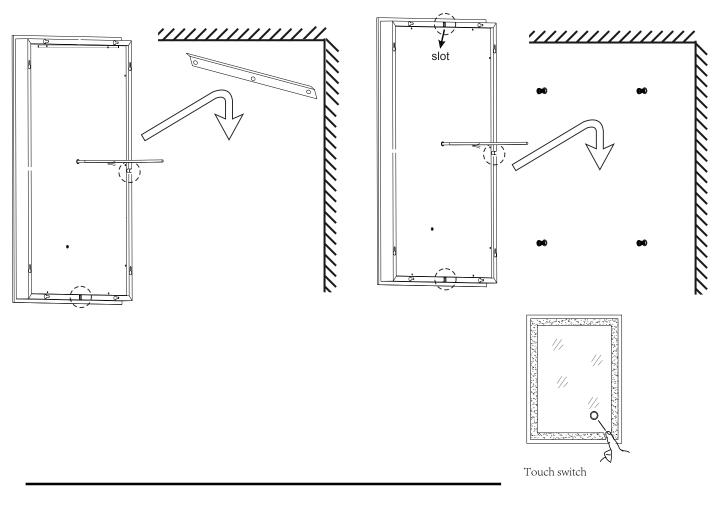

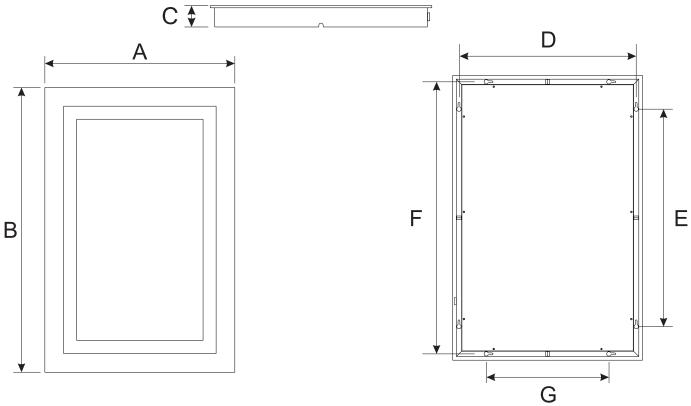

				Hanged V	ertically	Hanged Horizontally		
A	(imch)	B(imch)	C(imch)	D(imch)	E(imch)	F(imch)	G(imch)	Color temperature
	18	30	1.93	16.55	23.94	28.55	11.94	4200K/3000K/6400K
	18	36	1.93	16.55	29.94	34.55	11.94	4200K/3000K/6400K
	20	30	1.93	18.55	23.94	28.55	13.94	4200K/3000K/6400K
	20	36	1.93	18.55	29.94	34.55	13.94	4200K/3000K/6400K
	20	40	1.93	18.55	33.94	38.55	13.94	4200K/3000K/6400K
	24	30	1.93	22.55	23.94	28.55	17.94	4200K/3000K/6400K
	24	36	1.93	22.55	29.94	34.55	17.94	4200K/3000K/6400K
	24	40	1.93	22.55	33.94	38.55	17.94	4200K/3000K/6400K
	27	30	1.93	25.55	23.94	28.55	20.94	4200K/3000K/6400K
	27	36	1.93	25.55	29.94	34.55	20.94	4200K/3000K/6400K
	27	40	1.93	25.55	33.94	38.55	20.94	4200K/3000K/6400K
	30	30	1.93	28.55	23.94	28.55	23.94	4200K/3000K/6400K
	30	36	1.93	28.55	29.94	34.55	23.94	4200K/3000K/6400K
	30	40	1.93	28.55	33.94	38.55	23.94	4200K/3000K/6400K
	30	48	1.93	28.55	41.94	46.55	23.94	4200K/3000K/6400K
	30	72	1.93	28.55	65.94	70.55	23.94	4200K/3000K/6400K
	36	36	1.93	34.55	29.94	34.55	29.94	4200K/3000K/6400K
	36	40	1.93	34.55	33.94	38.55	29.94	4200K/3000K/6400K
	36	48	1.93	34.55	41.94	46.55	29.94	4200K/3000K/6400K
	36	60	1.93	34.55	53.94	58.55	29.94	4200K/3000K/6400K
	36	72	1.93	34.55	65.94	70.55	29.94	4200K/3000K/6400K
	42	60	1.93	40.55	53.94	58.55	35.94	4200K/3000K/6400K
	42	72	1.93	40.55	65.94	70.55	35.94	4200K/3000K/6400K