

# INSTRUCTIONS


## **⚠** WARNINGS

Read these instructions carefully prior to installation.

- Check for electric, gas, and plumbing lines before drilling or consult a professional.
- **ALWAYS** cut **ALL** relevant power before installing a lighting fixture, and do not restore power to the line until the lamp has been **FULLY** installed.
- Take care not to over-tighten the bolts for the glass shade.
- **DO NOT** use with bulbs exceeding the recommended wattage.

## ASSEMBLY

1. Prepare the wiring in your ceiling for the desired location of your new lamp. Prepare your junction box (not included).
2. Assemble the canopy (D), the center tube (F), the glass shade (G), the thick bolt (H), the cover (I), and the finial (J) together.
3. Take the mounting bracket (C) off the canopy. Connect your mounting bracket to your junction box using the mounting bolts (B).
4. Make electrical connections using the wire nuts (A).
5. Being careful that no wiring is left exposed, place the canopy against the mounting surface. Secure the canopy to the mounting bracket with the 2 previously removed canopy bolts (E).
6. Install your bulb into the socket. This fixture has been rated for up to three E12 40-watt maximum bulbs (not included).

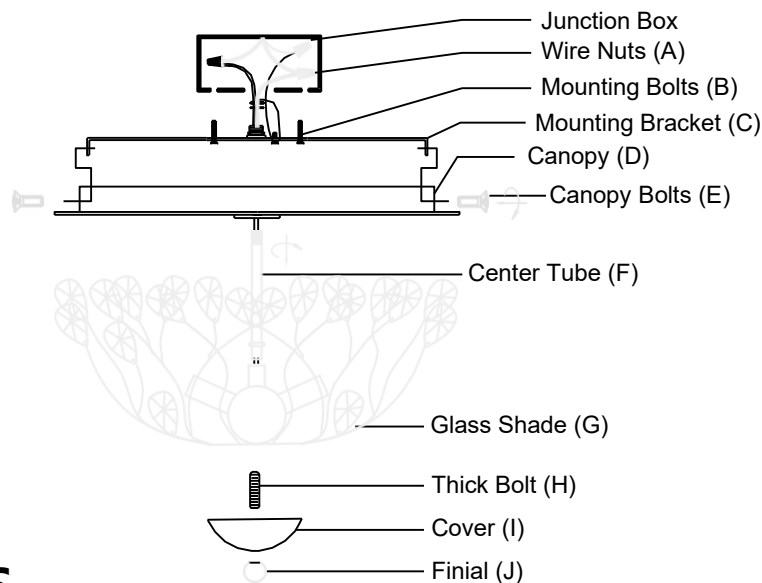

## CONTACT US

Thank you for choosing our products! If you have any questions or comments, contact us and we'll resolve your issue ASAP!