


User Manual

Package List

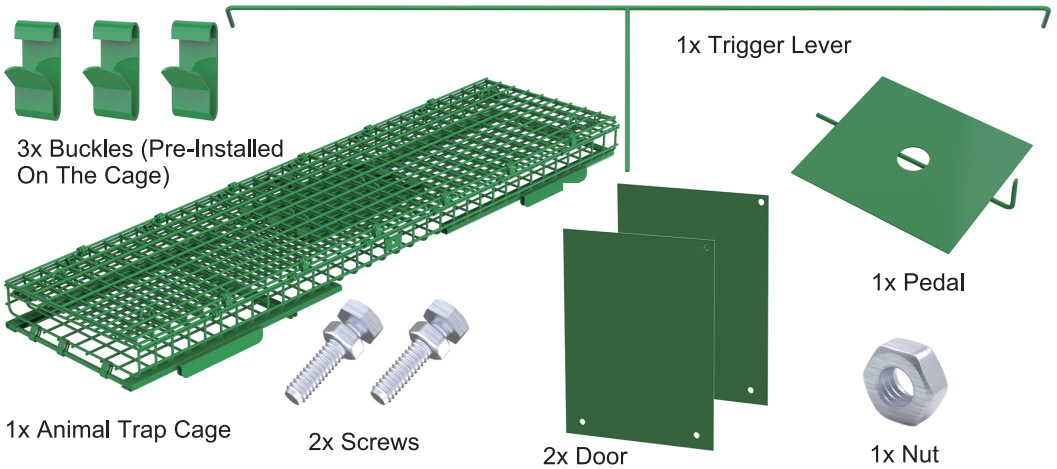


Specifications

- * Product Type: Humane Animal Trap Cage
- * Material: Galvanized Iron With Powder Coating
- * Color: Green
- * Wire Thickness: 0.27cm/0.1in
- * Applicable Animals: Under 18lbs


Highlights

- * Crafted from 0.1in thickened metal wires, this heavy duty humane animal trap cage ensures durability and sturdiness for long term use.
- * Once the pedal touched slightly, the sensitive trigger will instantly be activated, leaving no chance for animal to escape.
- * An upgraded handle with a guard plate is designed to prevent animals from scratching your hands.
- * Easy to use, bait, set & release. Pre-installed trap cage can be easily set up in minutes.
- * With a folding height of 3.15 inches, the animal trap cage can be easily collapsed for convenient storage and transportation, suitable for both indoor and outdoor use.


How To Install

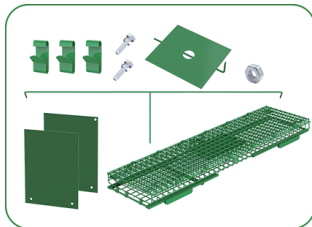


Step1: Take out the cage and check all the accessories.

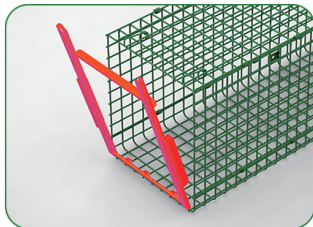


Step2: Unfold the cage, align the door frame to the cage frame, make sure the right, left and upper grooves are stuck to the cage.

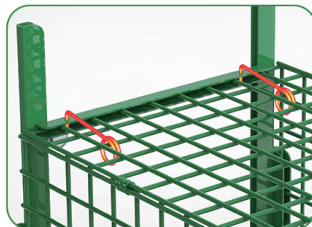


Step3: Hook up to secure the door with the cage.

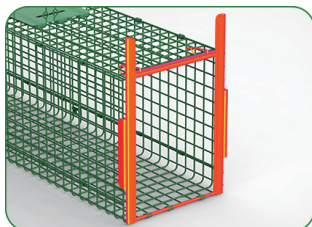

Step4: Repeat step2, 3 to install the other door.

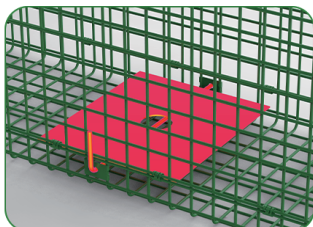

Step5: Remove the nut on pedal and install the pedal in the cage. Make sure both the rod are align with the holes.

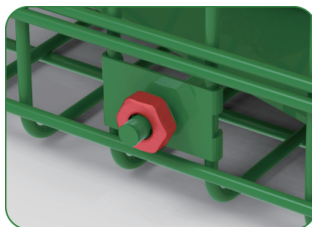


Step6: Screw up the nut to secure and adjust the tightness as needed.


Friendly Reminder: If it's hard to screw up the nut, you may need to scratch the green paint on the thread using a tool(such as use a plier) first, then you can screw up the nut more easily.



Step7: Take out the trigger lever and place it on the 3 slots of the pre-installed buckles

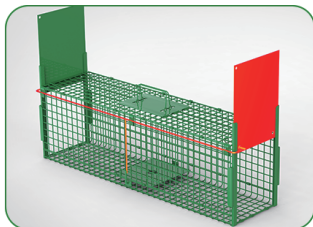

Step8: Use one hand to hold the hook of trigger lever, use the other hand to place the cage door into the door frame. The screw on the door should be upper on the hook of trigger lever, so the door won't fall down. Repeat to set up the other door.

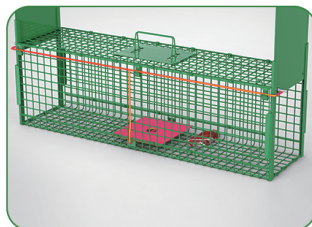

Step9: Clamp the tip of trigger lever with pedal rod, make sure they are secure in place that the door won't fall down once you release your hands.