




Assembly Instructions

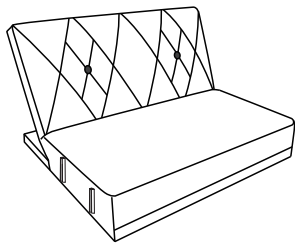


A x 1 Left Seat

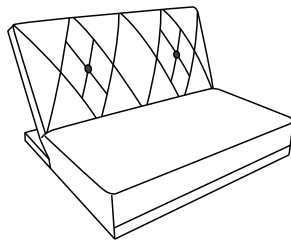


B x 1 Right Seat




C x 1 Left Arm



D x 1 Right Arm




E x 2 Pillow




F x 6 Leg



G x 24 Allen Bolt
M6*18 mm







H x 1
Open Wrench

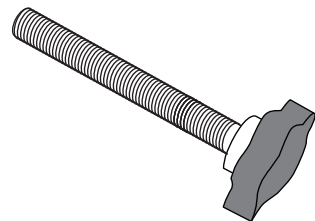

J x 1 Screw


STEP 1 : Assemble the chair on a flat and soft surface either on a carpet or cloth to prevent the finish from scratching. To locate the hardware , please turbb the seat (A ,B) upside down, you will find the components beneath the fabric cover that is secured by a velcro strap underneath the seat cushion. Lift the strap upwards, legs an hardware could be located beneath tha facric cover.

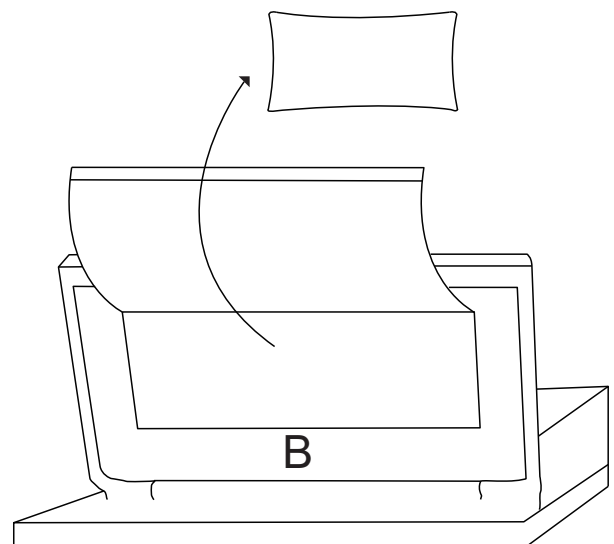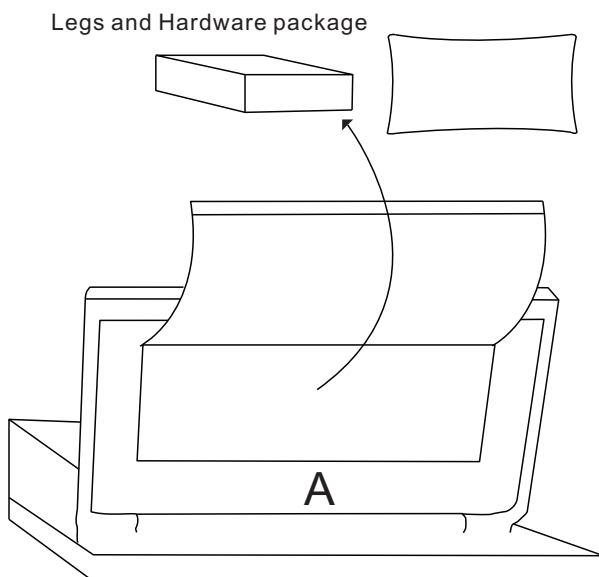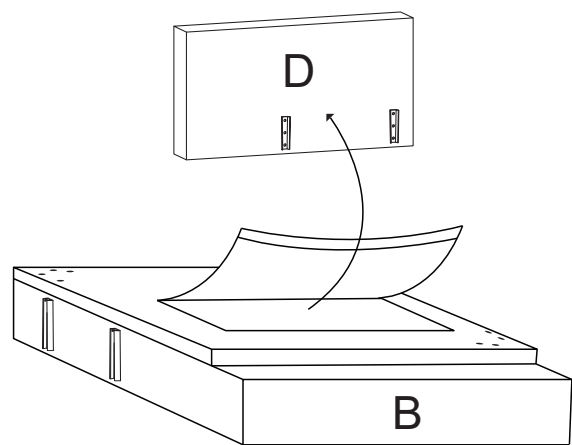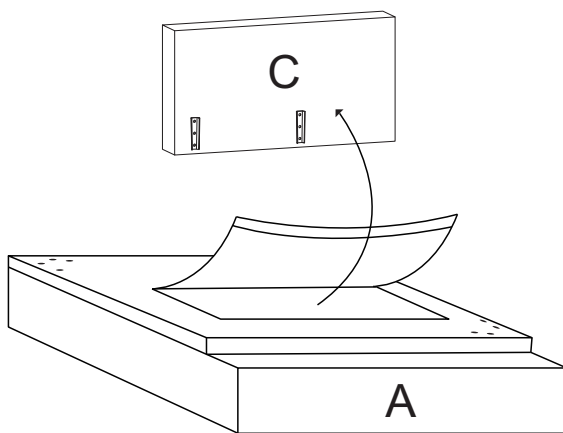



STEP 2 : Assemble the chair on a flat and soft surface either on a carpet or cloth to prevent the finish from scratching.

please turbb the seat (A ,B) upside down,

Insert part J into B from hole A to connect AB.

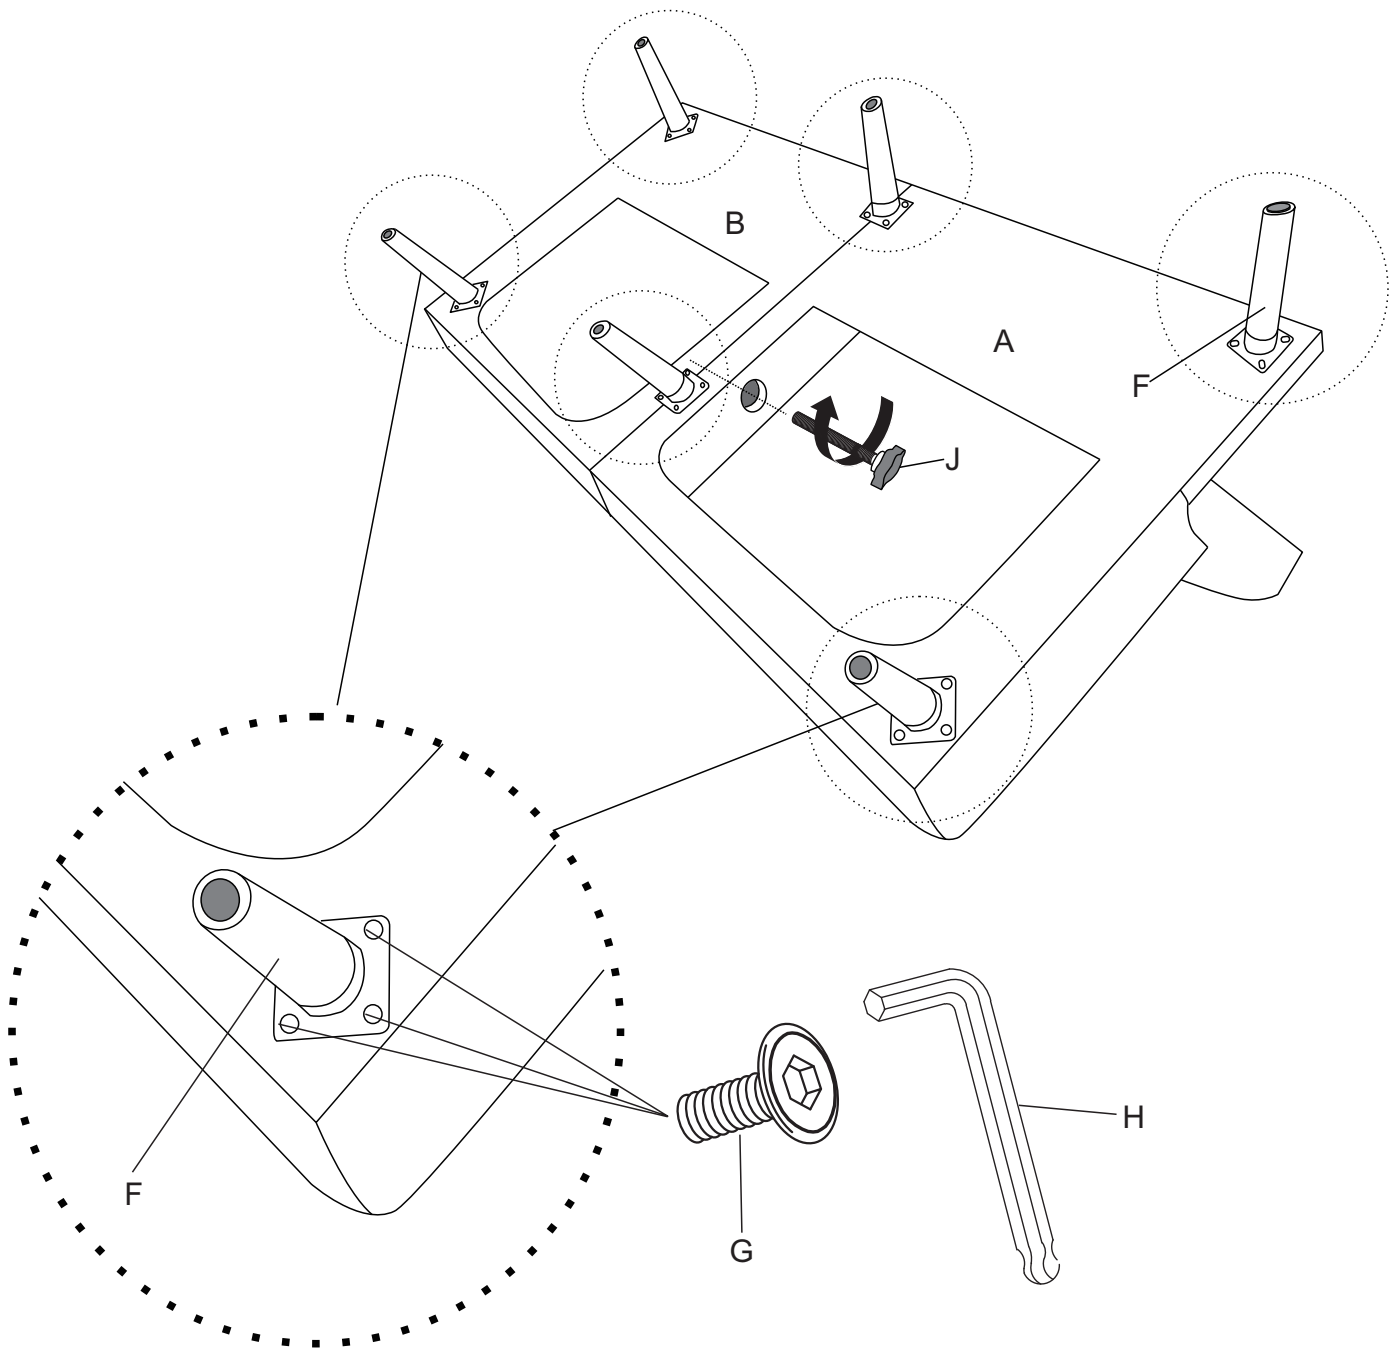

STEP 3 : Insert the Arm (C) the Chair Seat (A) hard side as below.
Insert the Arm (D) the Chair Seat (B) hard side as below.

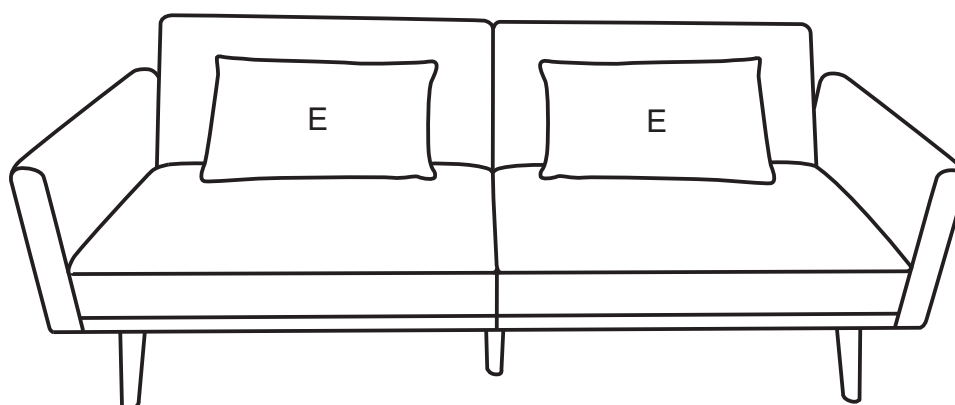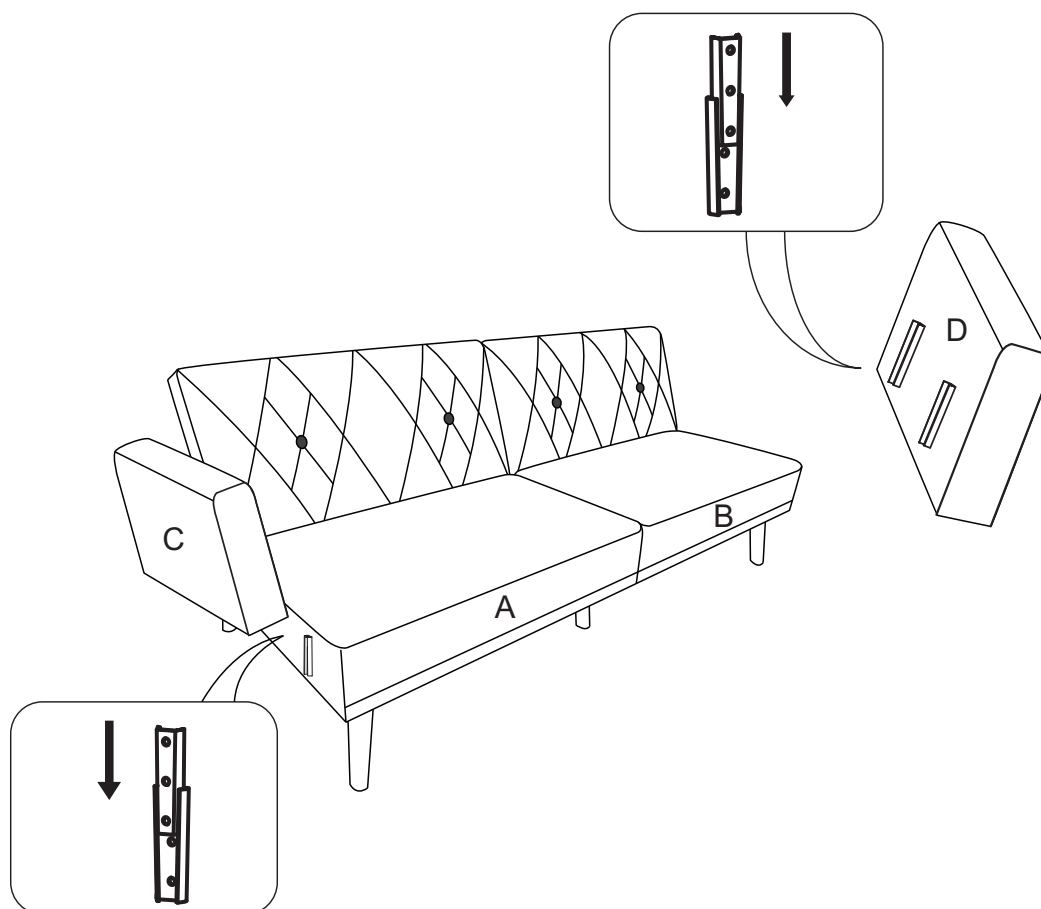

ATTENTION!!

Bolts may loosen during normal everyday use. They should be periodically inspected and re-tightened to prevent damage or injury. Always check to ensure that all hardware is kept tightened.