



Composed® | K-T73087-4

Floor-mount bath filler trim with handshower

Features

- Metal construction
- Adjustable handshower sprayface rotates to select wide coverage or forceful utility spray
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Complete range of faucets, accessories and showering components to coordinate a full bathroom



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:16 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 8-1/4" (210 mm)

Flow Rate

Faucet Flow Rate: 7.5 gpm (28.4 l/min)

Handshower Rated Maximum Flow: 1.75 gpm (6.6 l/min)

Valves

Required Valves: Thermostatic, Volume Control

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

- K-23723 Faucet cleaner
- K-73146 Double robe hook
- K-73144 24" double towel bar
- K-73145 Towel arm
- K-73148 Vertical toilet paper holder
- K-73141 18" towel bar
- K-73142 24" towel bar
- K-73147 Pivoting toilet paper holder

Required Products/Accessories


- K-97339 Mounting block for select floor-mount bath fillers

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



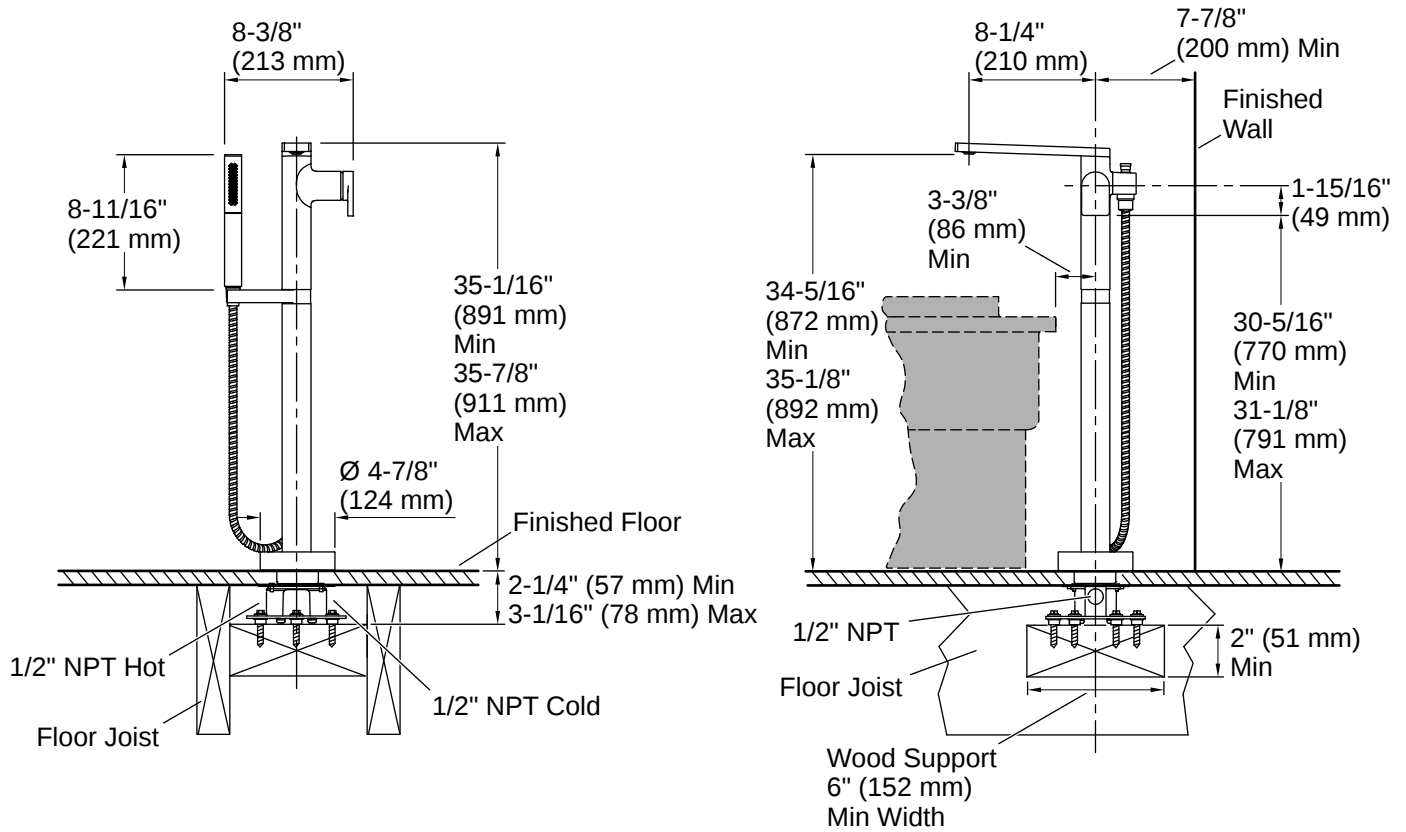

Installation Notes

Install this product according to the installation instructions.

Adequate floor space is required. The wood support must be a minimum of 2" (51 mm) thick by 6" (152 mm) wide. 2x6 lumber is NOT adequate for this application.

Concrete can be used as the floor support. Requires a 3/16" masonry drill bit and six 1/4" x 1-3/4" concrete screws, which are not included.

