


Manual

Remove contents from the bag and ensure you have all components listed below




Tent



Rain Fly




Tent Bag



2*Awning poles



2*Tent Poles



Fiberglass Tent Poles



14*Stakes



2*Tent Tie Straps




8*Guy Ropes

If you are missing any components, please contact us. We will provide you with a satisfactory solution promptly.
Amazon Contact: Log in to your Amazon account > select "Your Orders" > find the order ID > click "Contact Seller"


Assemble the Tent

It's better to visit our item page on Amazon for a helpful assemble and disassemble video.


1. Take the tent out of the bag and lay it flat on the ground. Ensure that the vehicle sleeve is facing the rear of the vehicle and make sure to install the pole ends into the footings.




2. Extend the tent's top support poles until fully locked in place, and secure the top plastic hooks onto the tent.

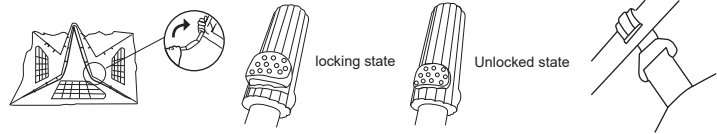


3. Extend the four telescopic poles from top to bottom until fully locked. Once the tent is upright, secure the plastic hooks onto the tent. (Note: Ensure the telescopic poles are straight to avoid any jamming.)




4. Adjust the position of the tent and install the connecting ports (it is recommended to open the rear trunk during installation). As shown in the diagram, sequentially attach the fabric straps' hooks to the vehicle for secure connection.

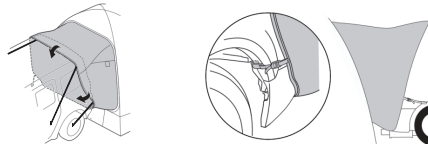


5. Thread the fiberglass poles through the fabric sleeves at the top of the front vestibule. Insert one end of each pole into the (small) end of the pole connector attached to the front vestibule's top corner.

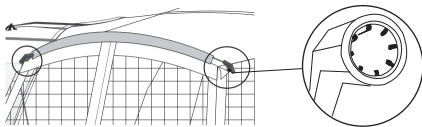


6. To assemble the tent poles, insert one end of the tent pole into the pin in the corner of the tent (where the tent pole is located) and the other end into the pole connector on the top of the vestibule. Repeat the above steps on the other side.

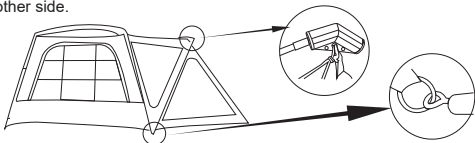


7. Place the rainfly over the tent and secure the hooks onto the loops at the bottom of the tent. Attach the rainfly to the tent poles one by one.

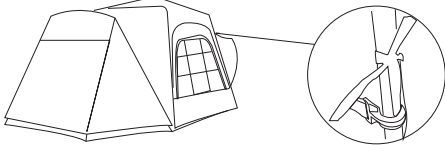

8. Secure the tent with stakes.

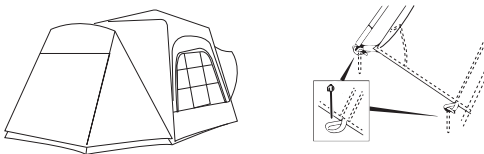

9. Assemble the awning poles and thread the pointed end of each pole through the grommet at the corner of the awning. Secure them with the guyline and adjust the length accordingly. Repeat the same process on the other side.

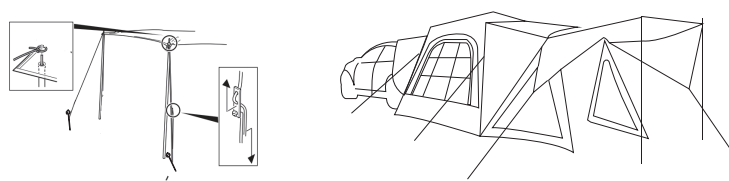

After removing the tent from the vehicle, take off the rainfly. Follow the steps below to pack the tent:

- 1) Place the tent flat on the ground (make sure the doors and windows are open to allow air to escape).
- 2) Remove the hook from the tent frame, press the buckle to fix the tent pole, and shrink the pole from bottom to top. Fold 4 legs.
- 3) Roll up the tent and make sure it is flat.
- 4) Its width is the width of the tent pole. If it is larger, the tent will not fit in the tent storage bag.
- 5) Fold the rain fly and place it on the tent and start rolling the tent up to let the air out.
- 6) Roll up the tent tightly, tie it with straps, and put it into the tent Bag.

⚠ WARNING

Keep all flame and heat sources away from the tent fabric. To prevent carbon monoxide from entering the vehicle and tent area, do not run the engine, do not cook inside the tent, and do not use a gas heater in the tent. Carbon monoxide is dangerous to your health. Engine must be off and exhaust must be fully cooled before tent installation and use.

CAUTION

- Never run the engine while the tent is installed.
- Do not refuel lanterns, stoves or heaters inside tent.
- Do not cook inside the tent.
- Do not store flammable liquids inside the tent.
- Never allow the vehicle engine to run while you are inside the tent
- Do not install the tent when the outside temperature is less than 0°C/32°F as it may cause damage.
- Do not install the tent when your vehicle is wet as it may cause damage.

CHOOSING A CAMPSITE

- Select a level site clear of rocks, branches, and other hard or sharp objects, to set up your tent.
- Position the vehicle in the desired campsite. Turn off the engine. Apply the parking brake.