

HIGHLIGHTS

- FULLY DIMMABLE
- DAMP LOCATION RATED
- HIGH CRI
- LOW GLARE
- SLEEK DESIGN
- ENERGY STAR QUALIFIED
- UL LISTED
- LONG LIFE

LUXRITE LED

PAR
SHAPE



3 Year
Warranty




LUXRITE

SPECIFICATIONS

MODEL	CASE	BASE	FLOOD	LIFETIME RATED	VOLTS
ALL	15	E26	40°	25000	120

	MODEL	DESCRIPTION	WATT	LUMENS	COLOR	TEMP	UL	ENERGY STAR	MOL	CRI	DIMMABLE
PAR 20	LR31500	LED6.5PAR20/FL40/27K/DIM	6.5	460	2700K	Warm White	•	•	3.18"	83	•
	LR31501	LED6.5PAR20/FL40/30K/DIM	6.5	460	3000K	Soft White	•	•	3.18"	84	•
	LR31503	LED6.5PAR20/FL40/40K/DIM	6.5	460	4100K	Cool White	•	•	3.18"	83	•
	LR31504	LED6.5PAR20/FL40/50K/DIM	6.5	460	5000K	Bright White	•	•	3.18"	86	•
PAR 30	LR31510	LED12PAR30L/FL40/27K/DIM	12	850	2700K	Warm White	•	•	4.56"	83	•
	LR31511	LED12PAR30L/FL40/30K/DIM	12	850	3000K	Soft White	•	•	4.56"	83	•
	LR31513	LED12PAR30L/FL40/40K/DIM	12	850	4100K	Cool White	•	•	4.56"	84	•
	LR31514	LED12PAR30L/FL40/50K/DIM	12	850	5000K	Bright White	•	•	4.56"	85	•
PAR 38	LR31515	LED16.5PAR38/FL40/27K/DIM	16.5	1160	2700K	Warm White	•	•	5.05"	84	•
	LR31516	LED16.5PAR38/FL40/30K/DIM	16.5	1160	3000K	Soft White	•	•	5.05"	83	•
	LR31518	LED16.5PAR38/FL40/40K/DIM	16.5	1160	4100K	Cool White	•	•	5.05"	84	•
	LR31519	LED16.5PAR38/FL40/50K/DIM	16.5	1160	5000K	Bright White	•	•	5.05"	85	•

COLOR TEMPERATURE

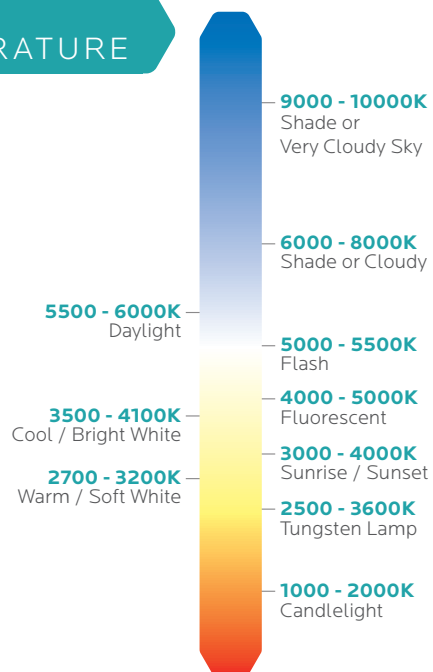

BEAM ANGLE

