


Installation Instructions

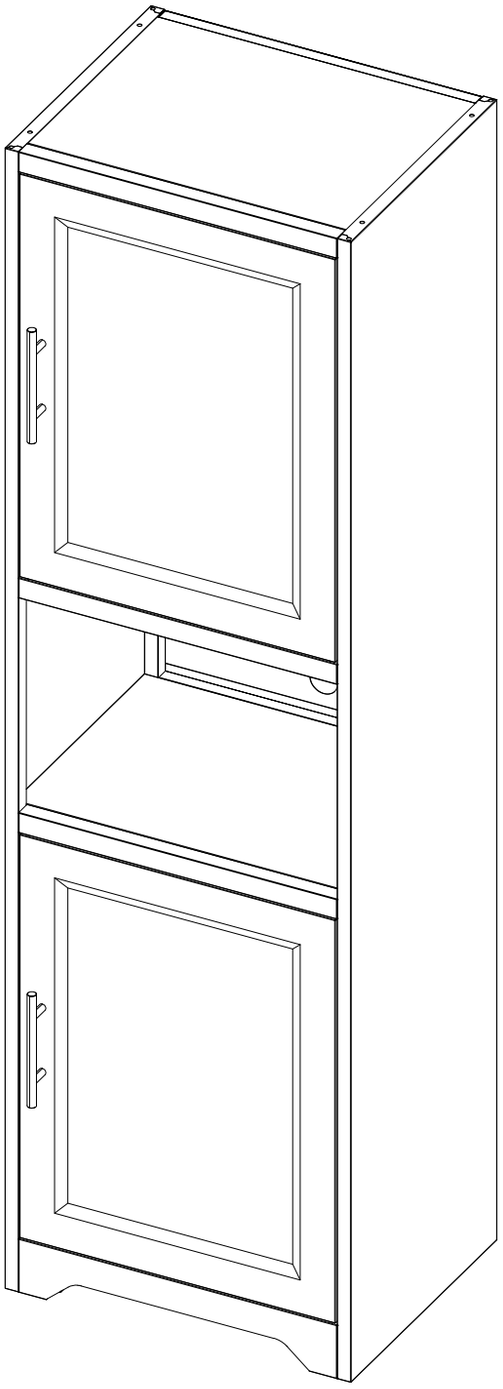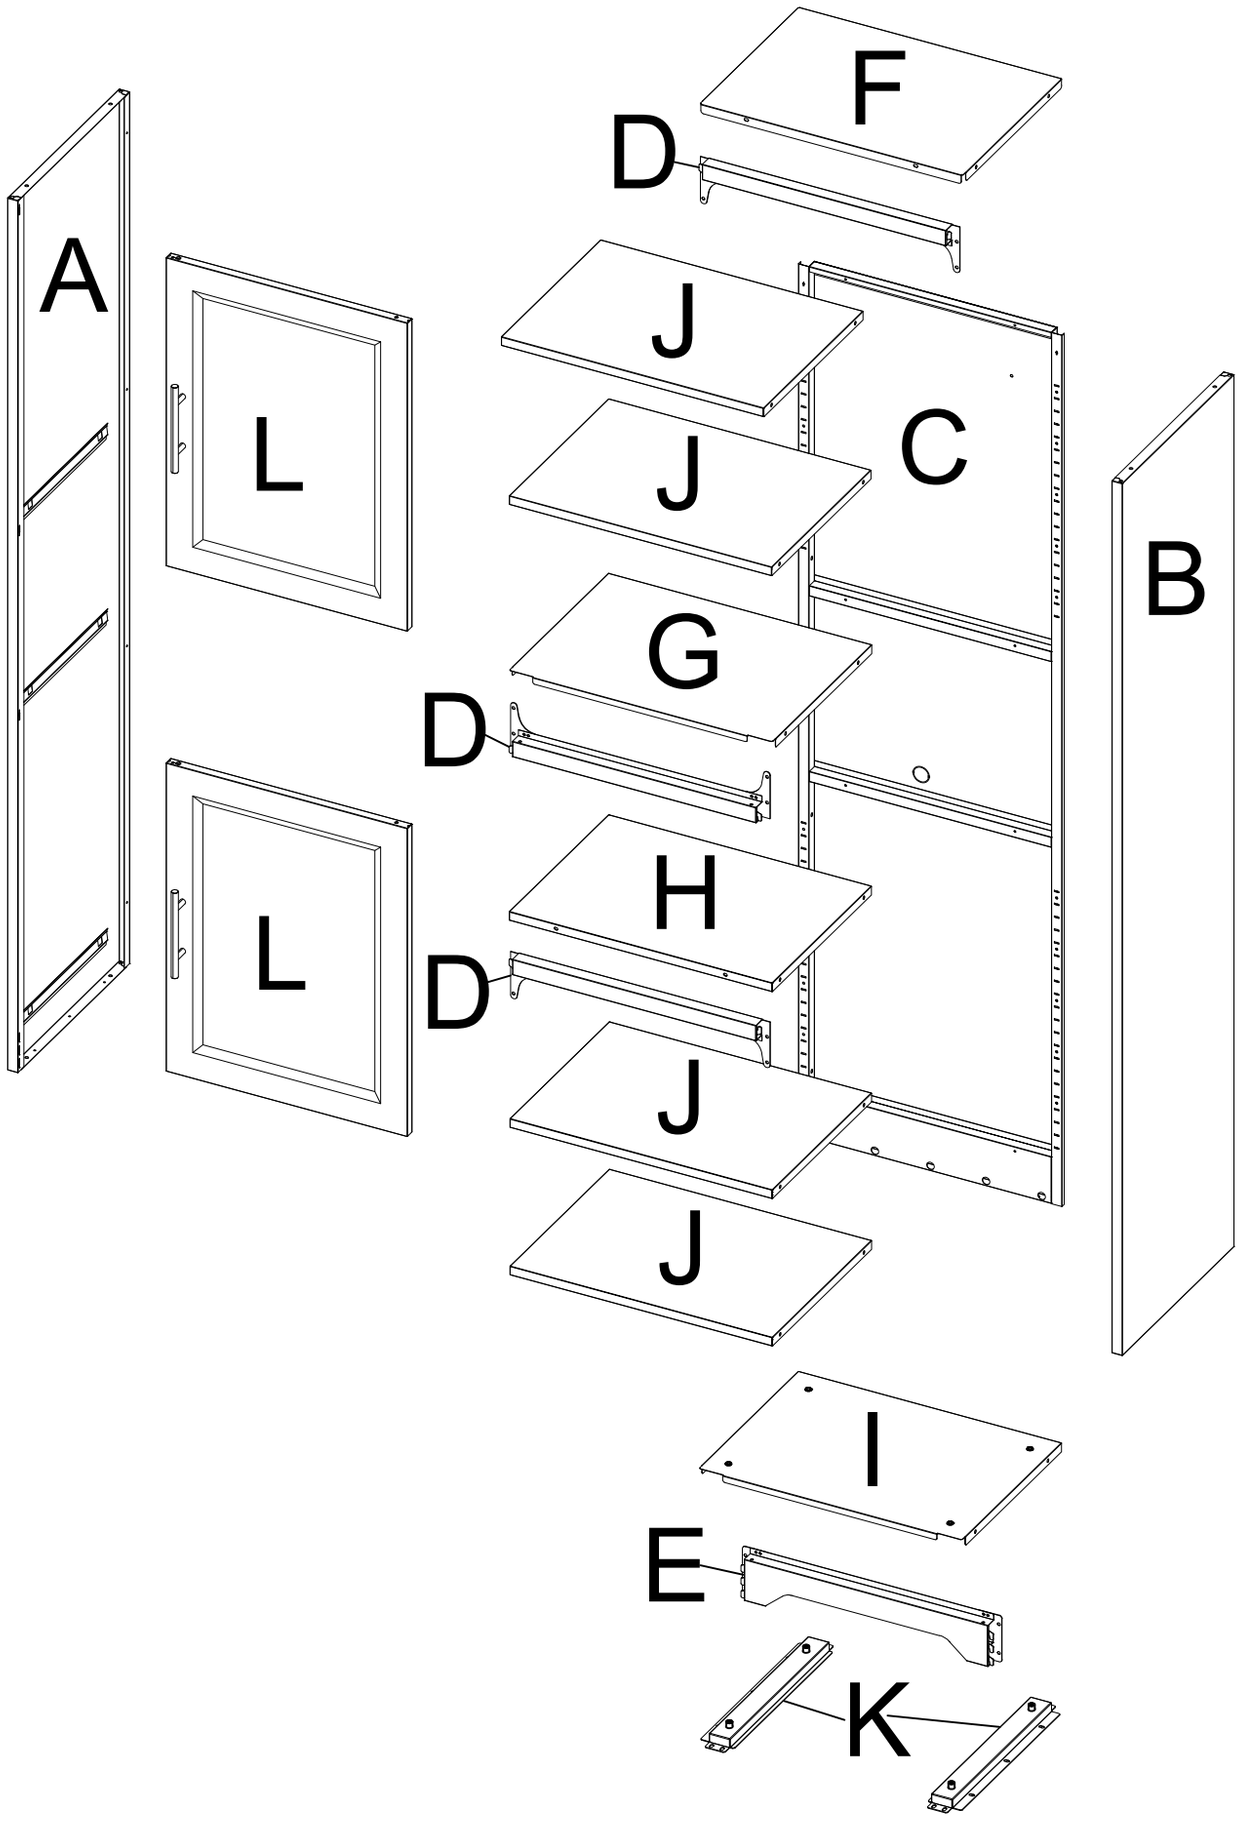



A
L
L
F
D
J
J
C
G
D
H
D
J
J
B
I
E
K


A×1

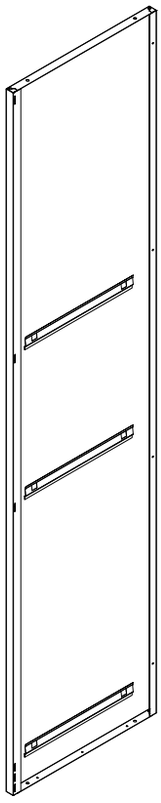


B×1

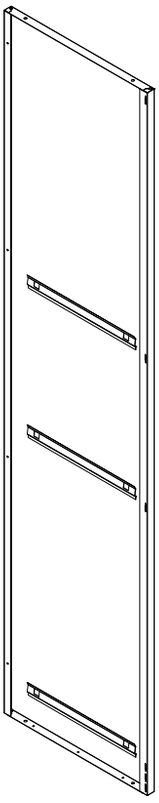


C×1

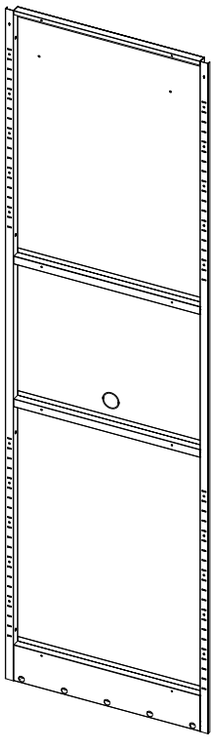


D×3




E×1




F×1

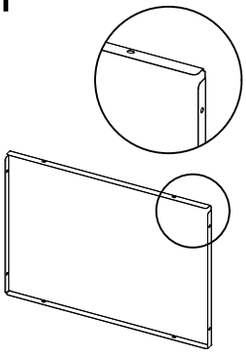


G×1

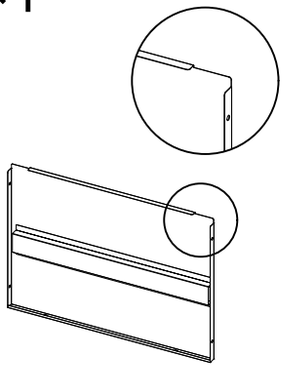


H×1

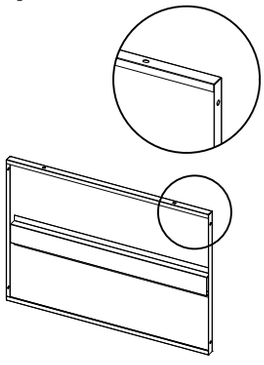


I×1

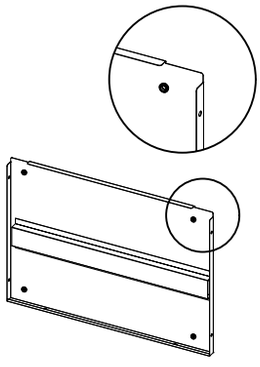


J×4

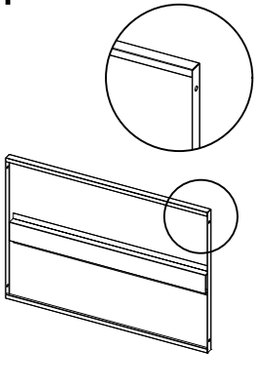

K×2



L×2



M×50



N×16



O×1



P×4



Q×4



R×4



S×2



T×2




U×2

Spare Parts




V×4



1


Connect Part A to the left side of Part C, then secure them with four screws inserted through the side screw holes.(Note: Install Part A on the left and Part B on the right of Part C. Incorrect assembly may affect cabinet installation.)

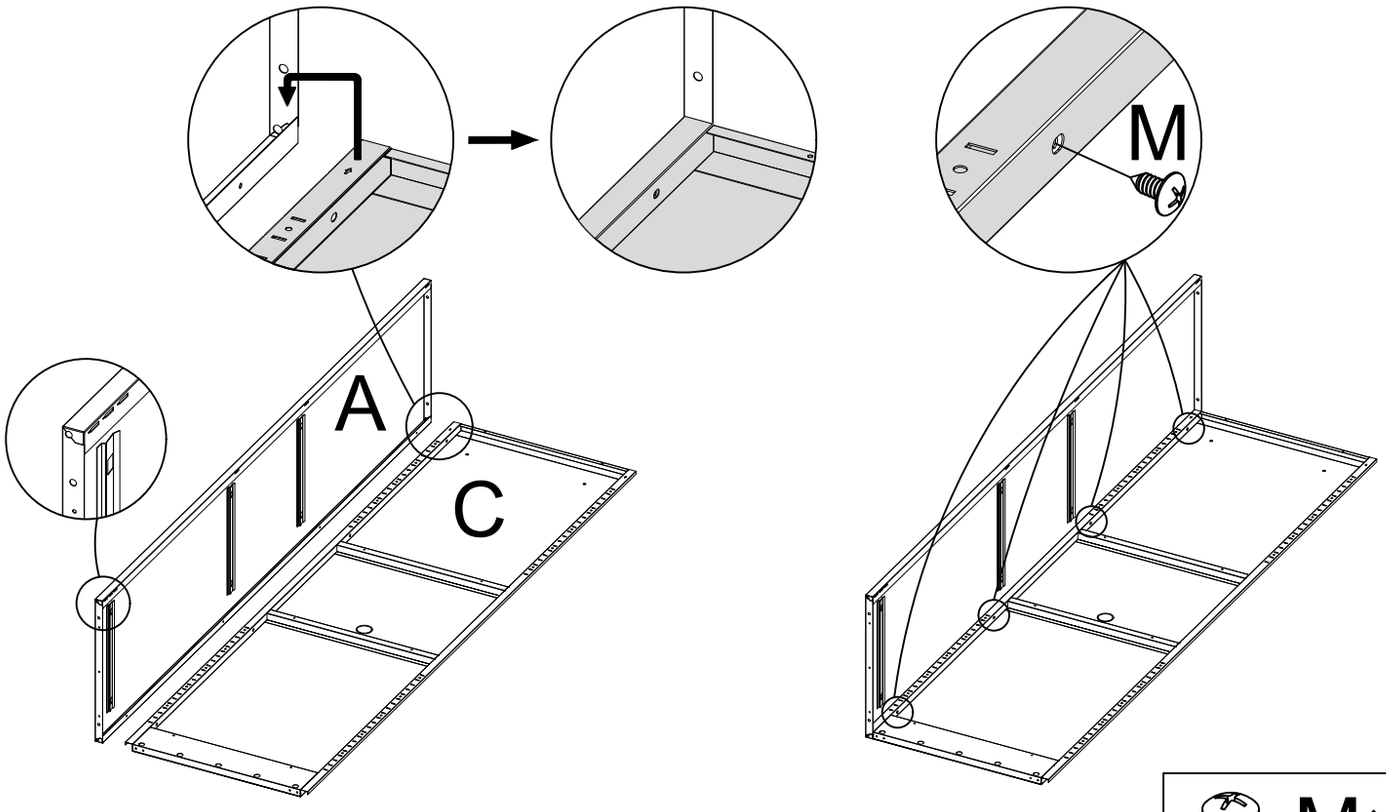

M×4

2


Connect Part B to the right side of Part C, then secure them with four screws inserted through the side screw holes.(Note: Install Part A on the left and Part B on the right of Part C. Incorrect assembly may affect cabinet installation.)

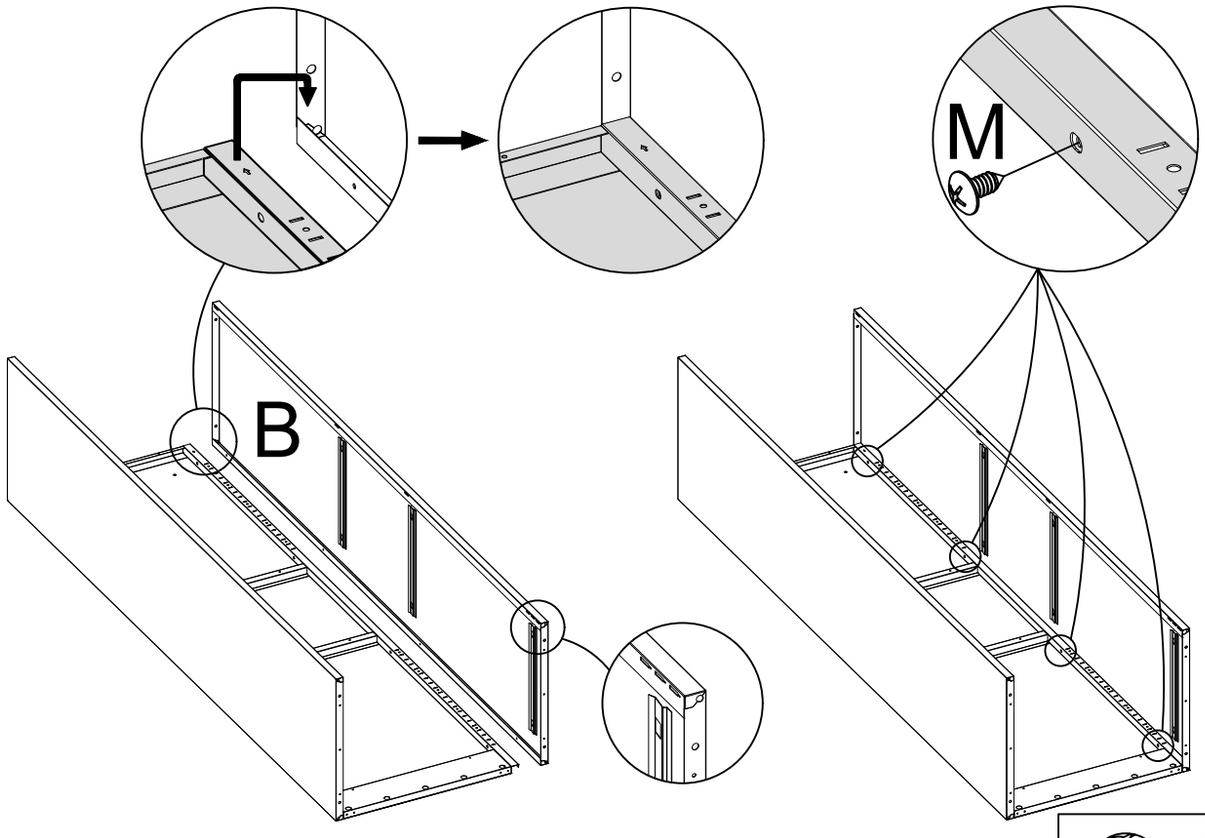

M×4

3

Snap the three buckles on either side of Part E into the three holes in both side panels and then push it down so that it snaps into the bottom of the cabinet. Then secure Part E in place from the inside using four screws.

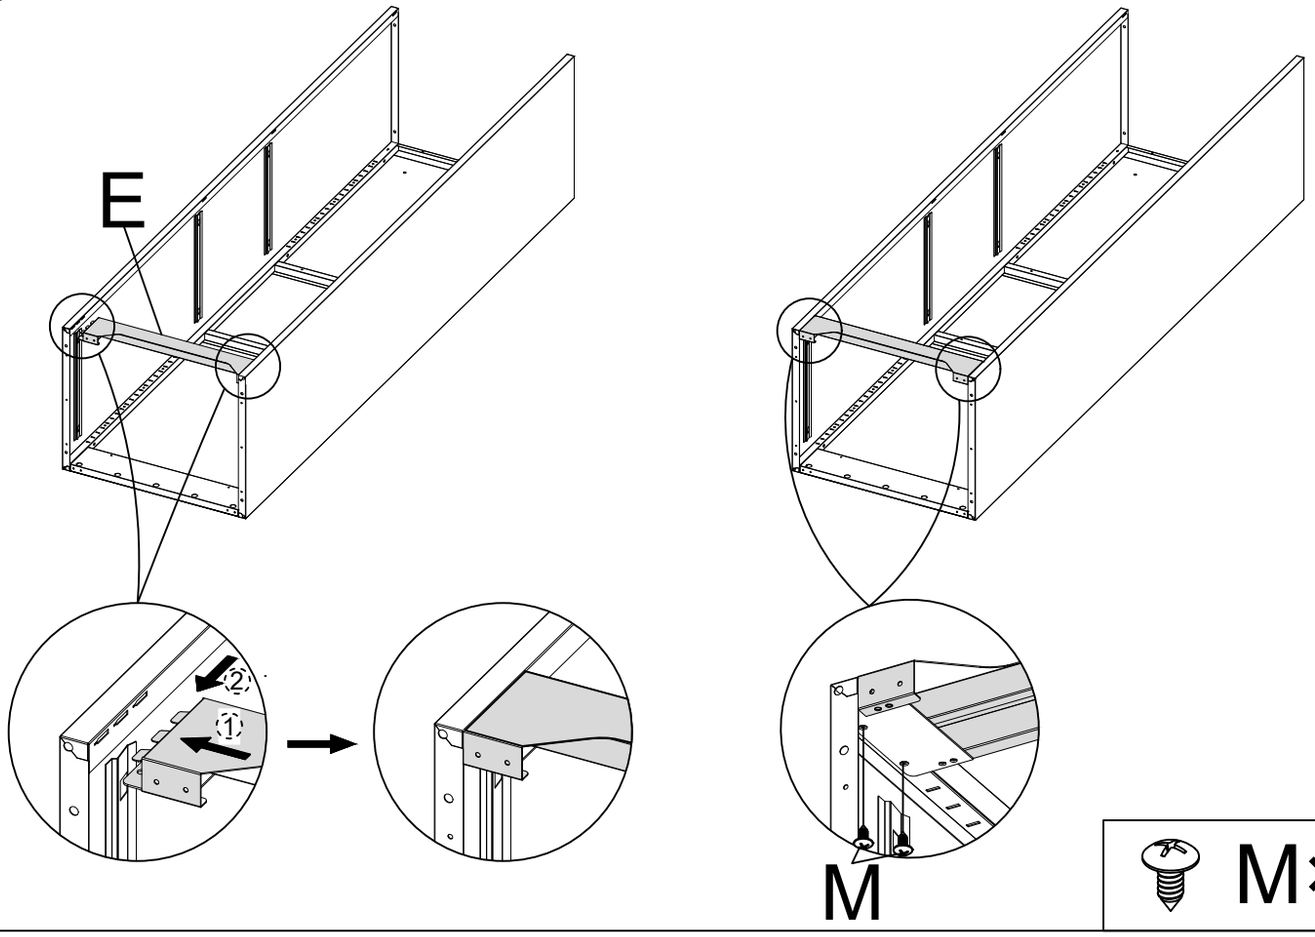


M×4

4


Install both Parts D simultaneously on one side of the cabinet, then repeat on the opposite side.

The upper Part D must have the tab facing up; the lower Part D with the tab facing down. Press the upper part downward and push the lower part upward firmly until fully seated.

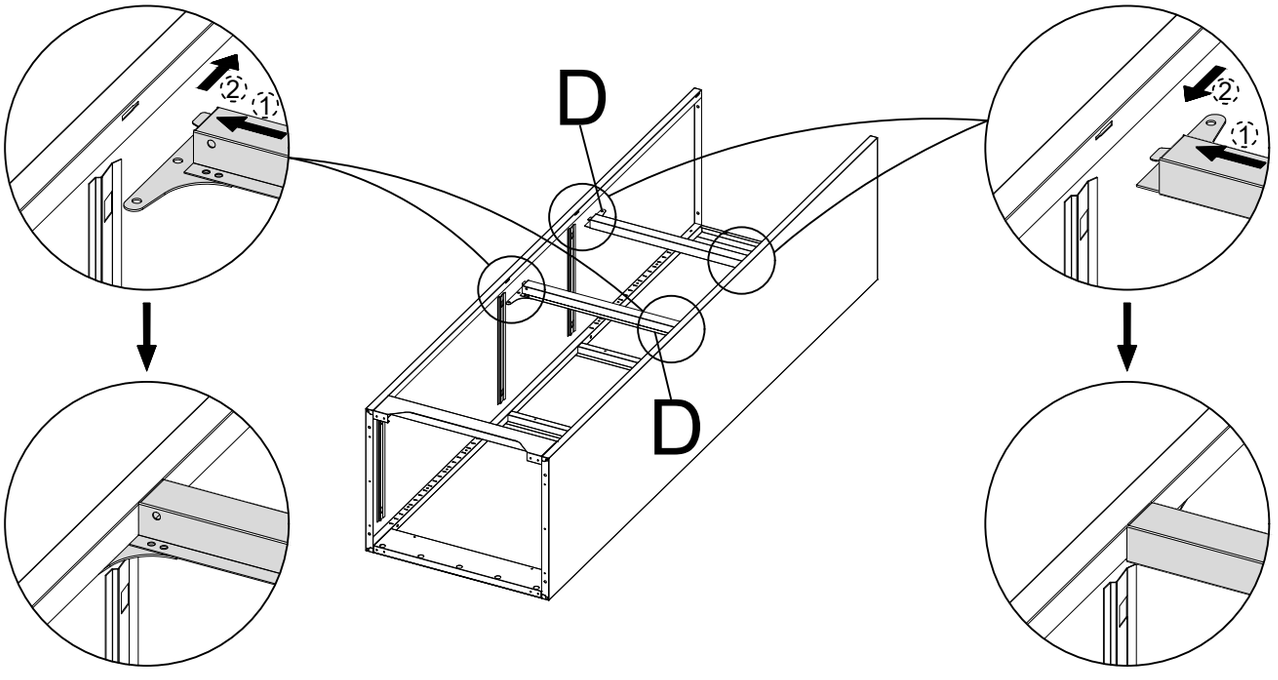

5


Secure Parts D placed in the previous step with eight screws from the inside.

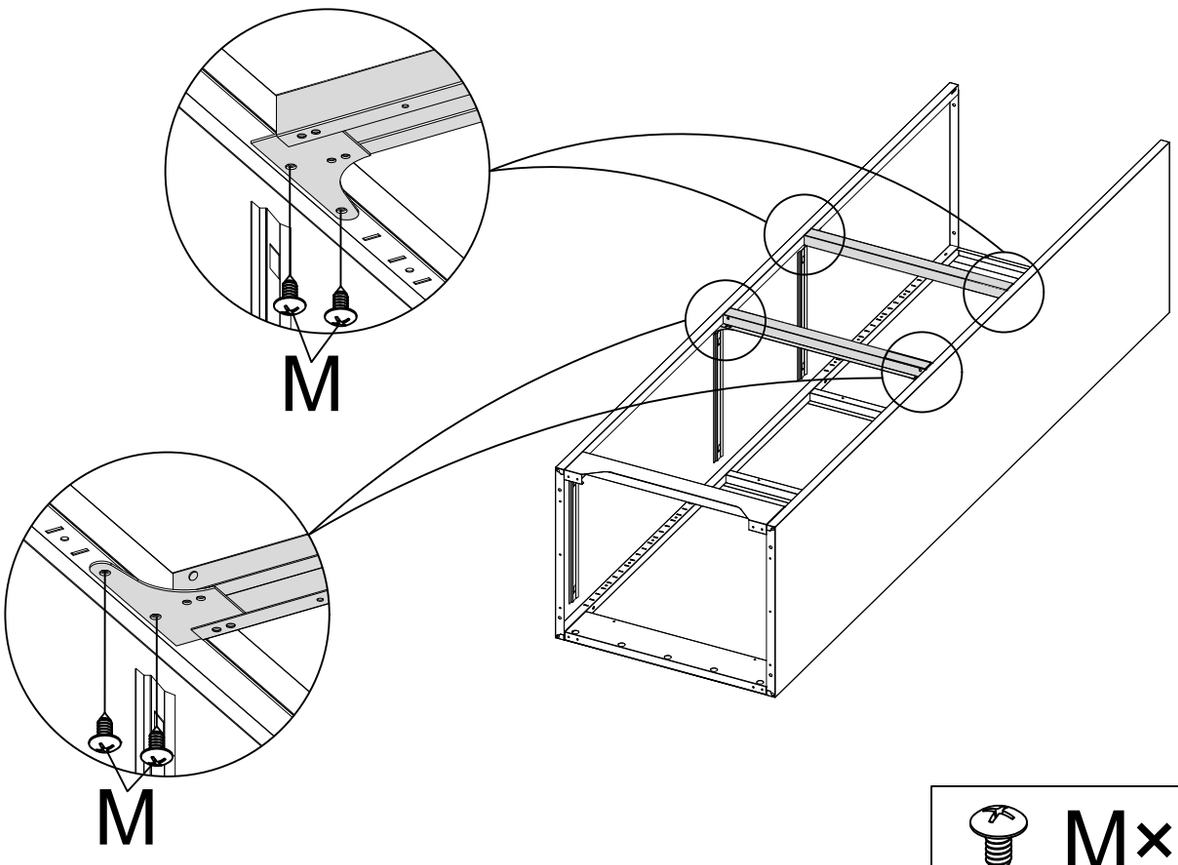

M×8

6

Install Part D on top, then push it upward until it is fully seated and secure it with four screws from the inside.

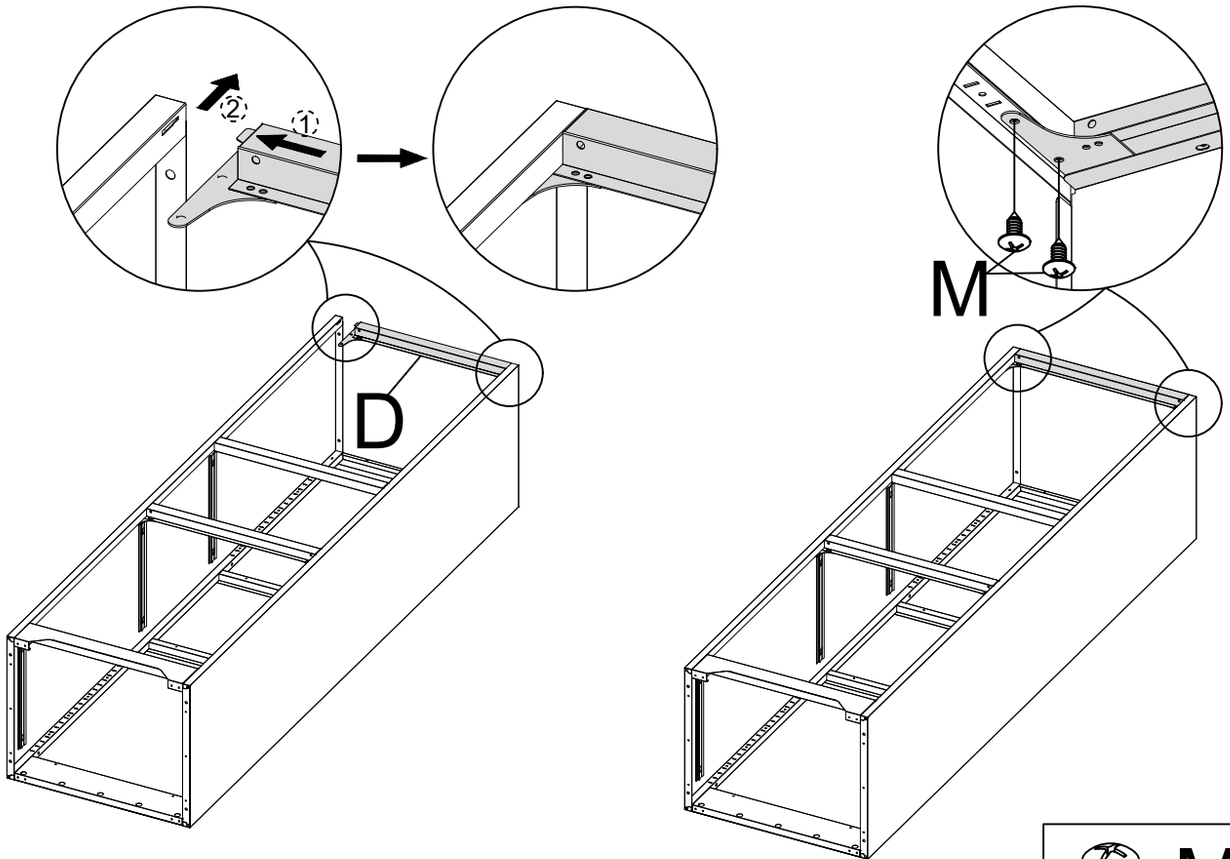


M×4

7

Install Part F into the cabinet and secure it with four screws from the inside.


Note: The concave side of Part F with the folded edge should face inward toward the inside of the cabinet.

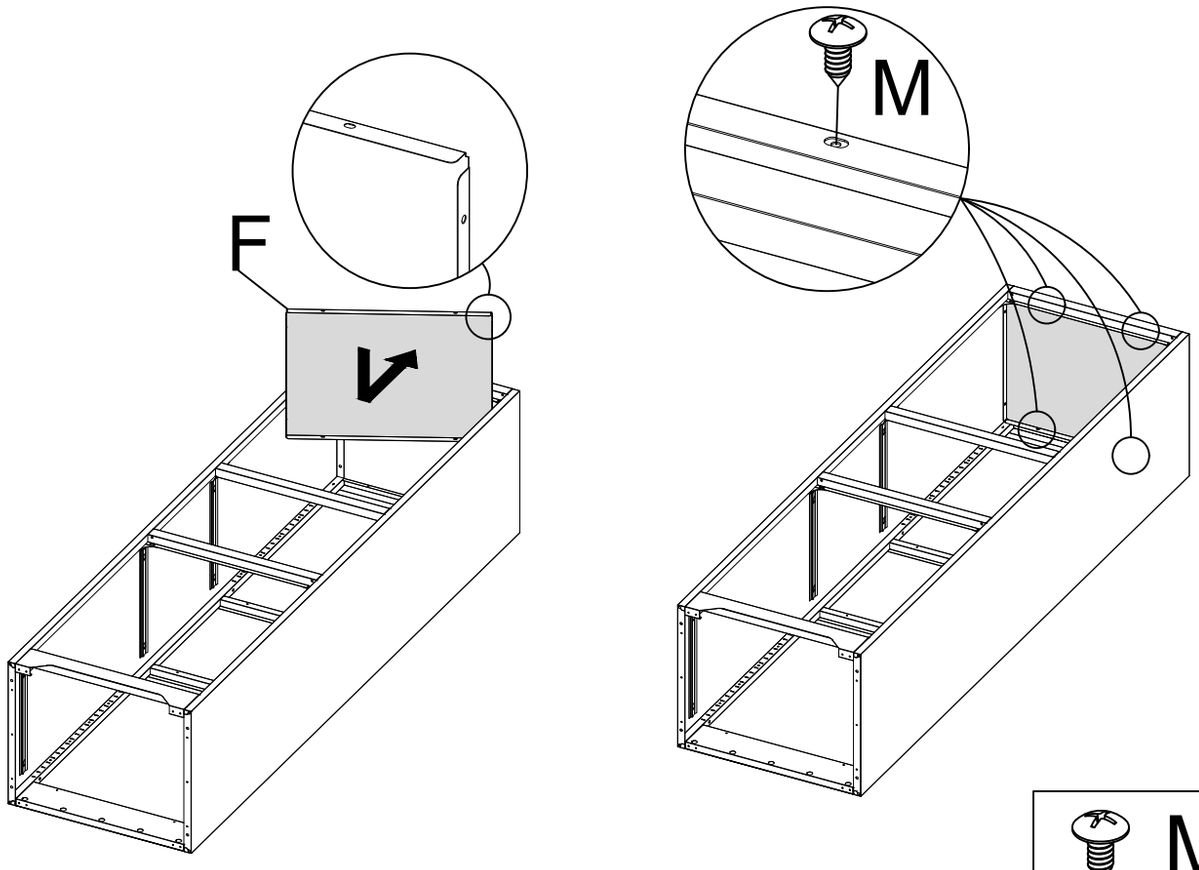

M×4

8

Insert Part I into the cabinet, and secure it with two screws from the inside.

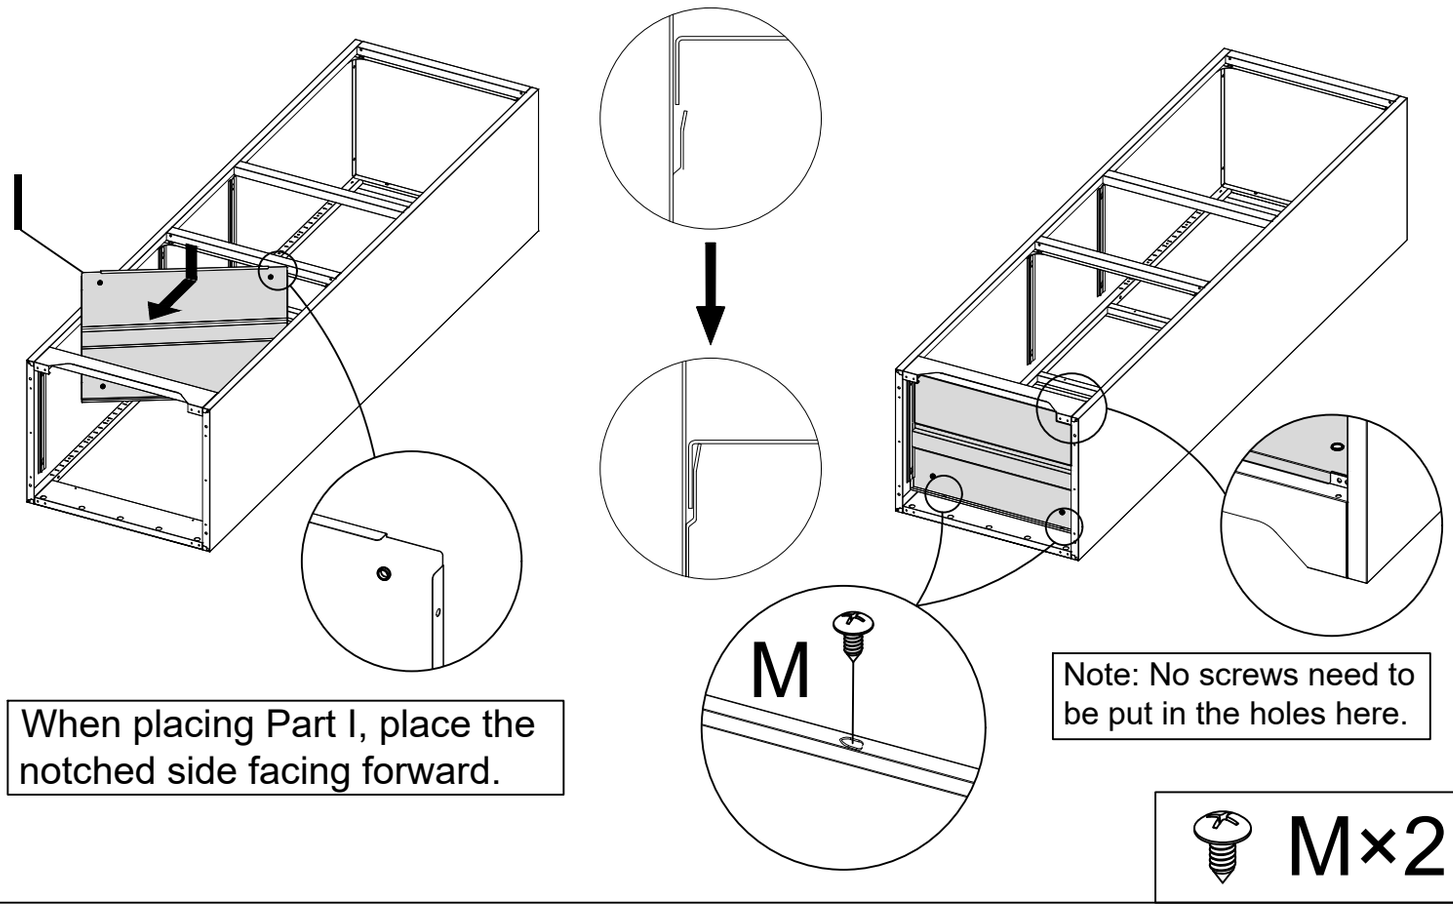

When placing Part I, place the notched side facing forward.


Note: No screws need to be put in the holes here.

M×2

9

Put the two metal strips K into the bottom frame, taking care that the raised side of Parts K faces the inside of the cabinet and is flush with the bottom of the cabinet when assembled.

The raised gold hardware side on Part K faces the bottom of the cabinet.

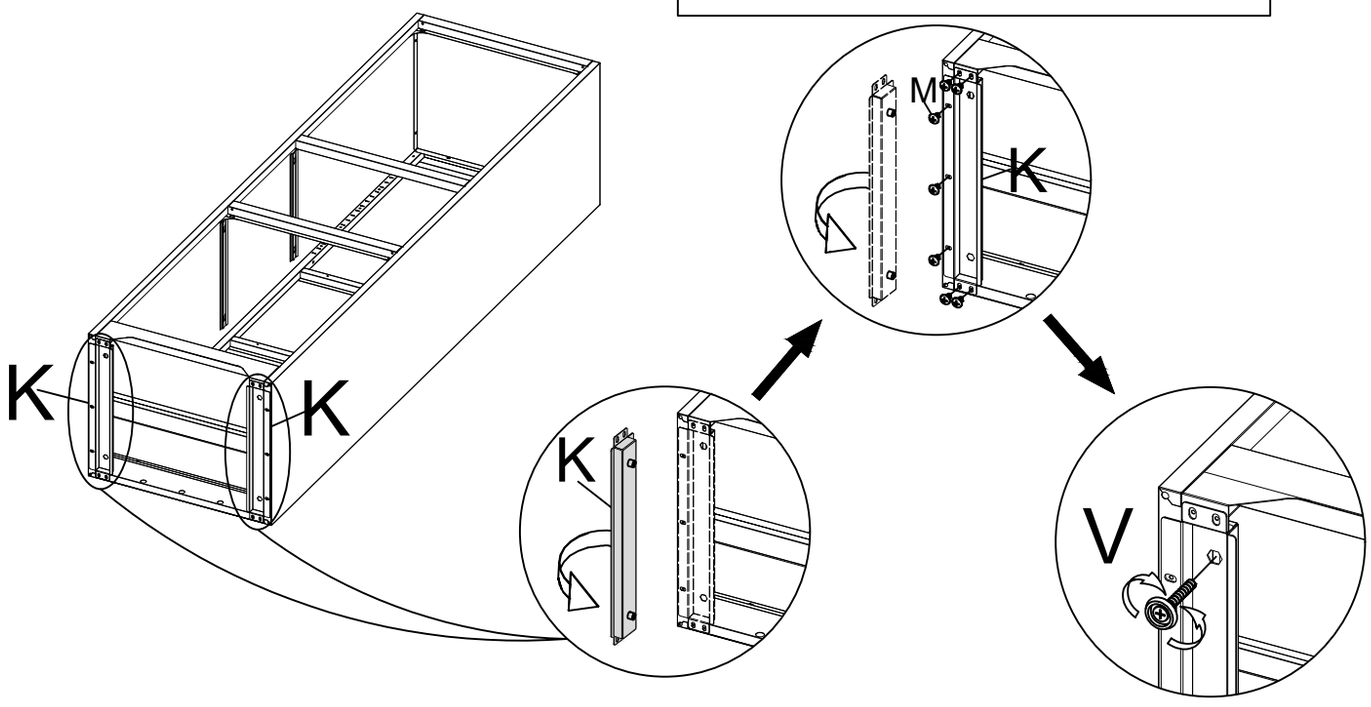


V×4	M×14

10

This step is not mandatory, you can decide whether to perform it based on your personal needs.


If you need to run a power strip inside the cabinet, follow the instructions below: Gently wiggle the metal cover inside the pre-drilled hole on the back panel until it falls out, then install part O into the hole.

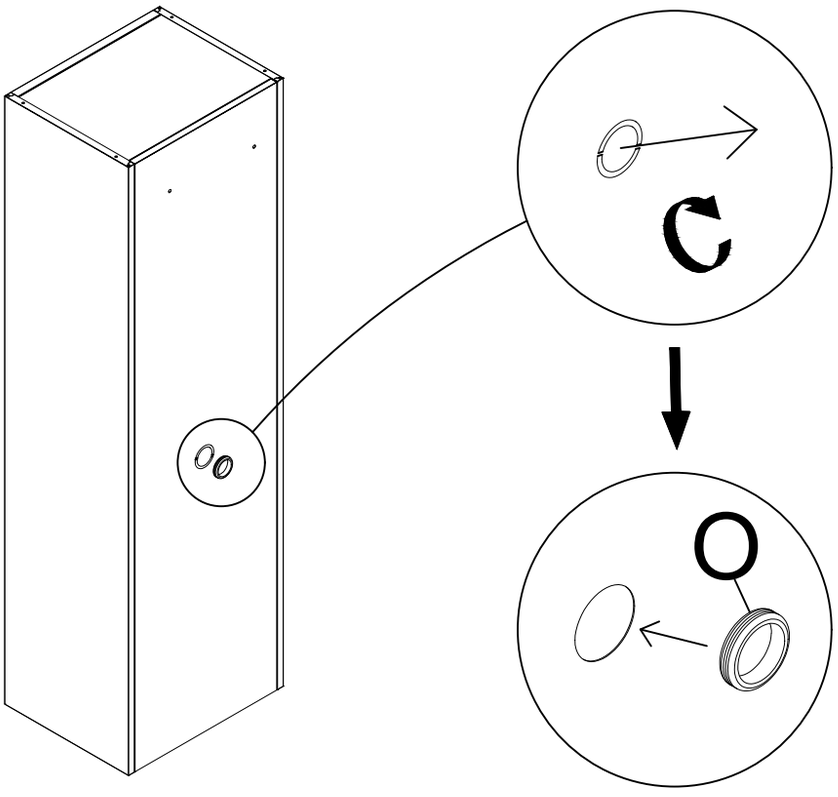


O×1

11

The cabinet can be fixed to the wall as needed.

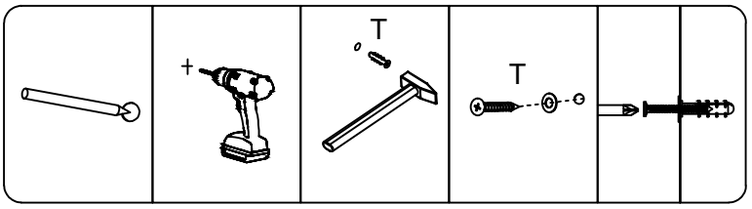


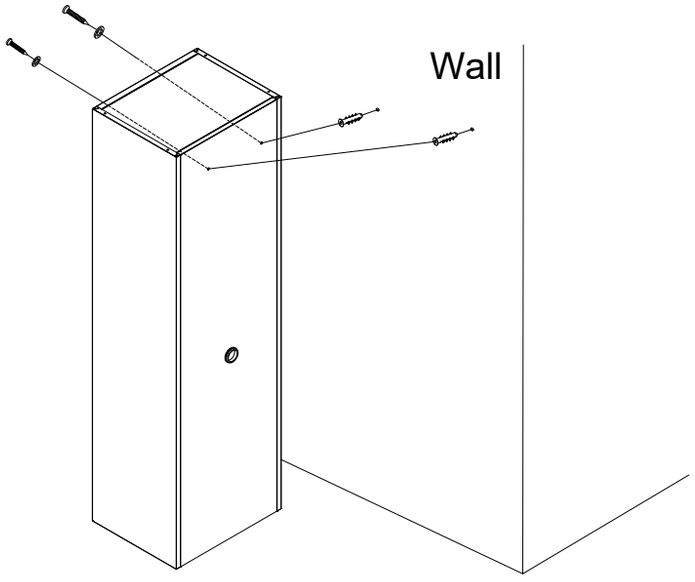


T×2

12


Install Part G into the cabinet, and secure it with two screws from the inside.

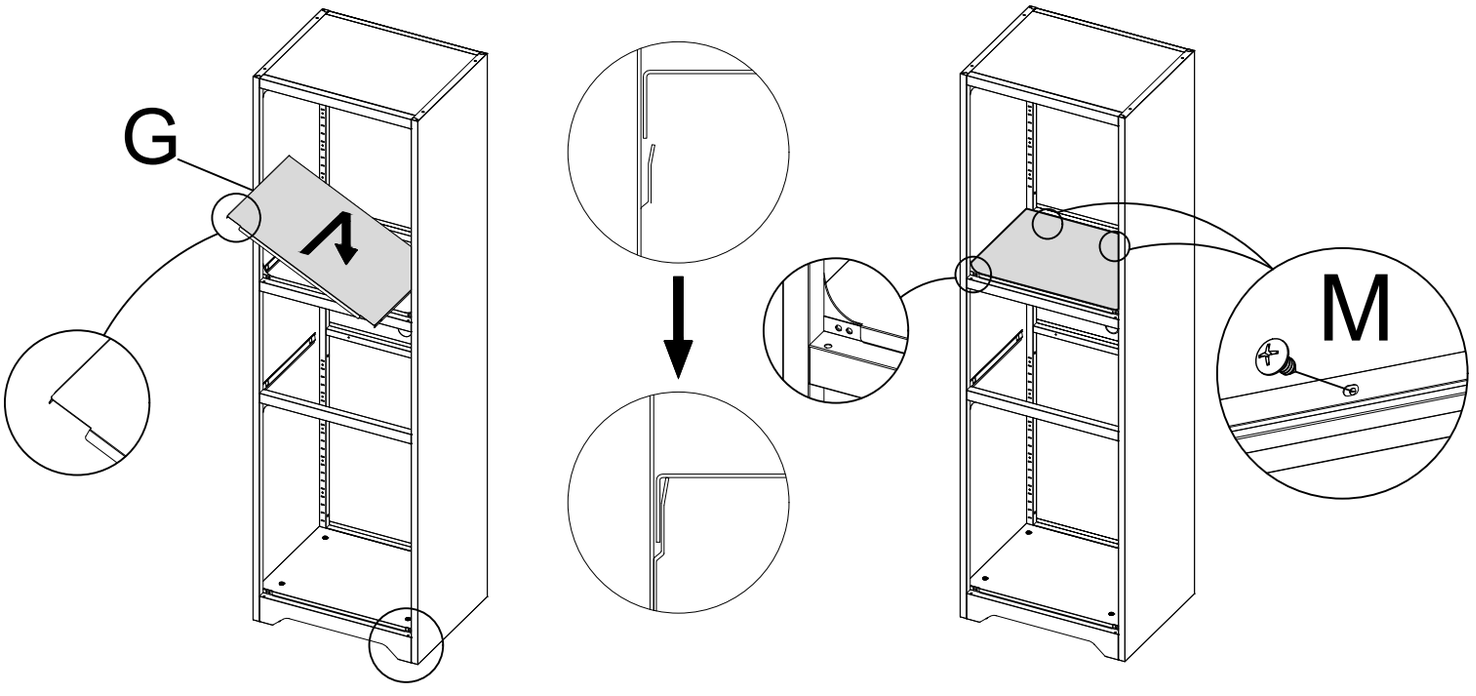


M×2

13


Install Part H into the cabinet, and secure it with four screws from the inside.

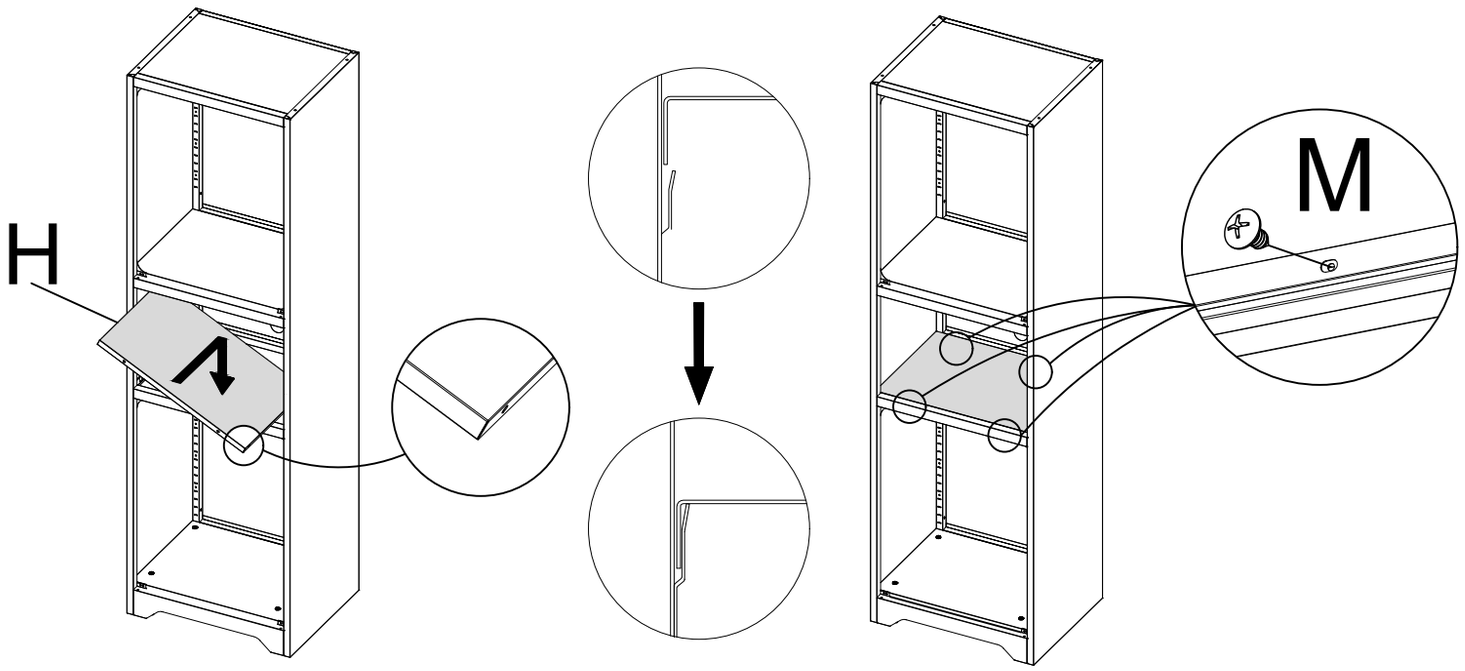

 M×4


14

Put four support clips N in the four corners of the cabinet, taking care to place them on the same level.

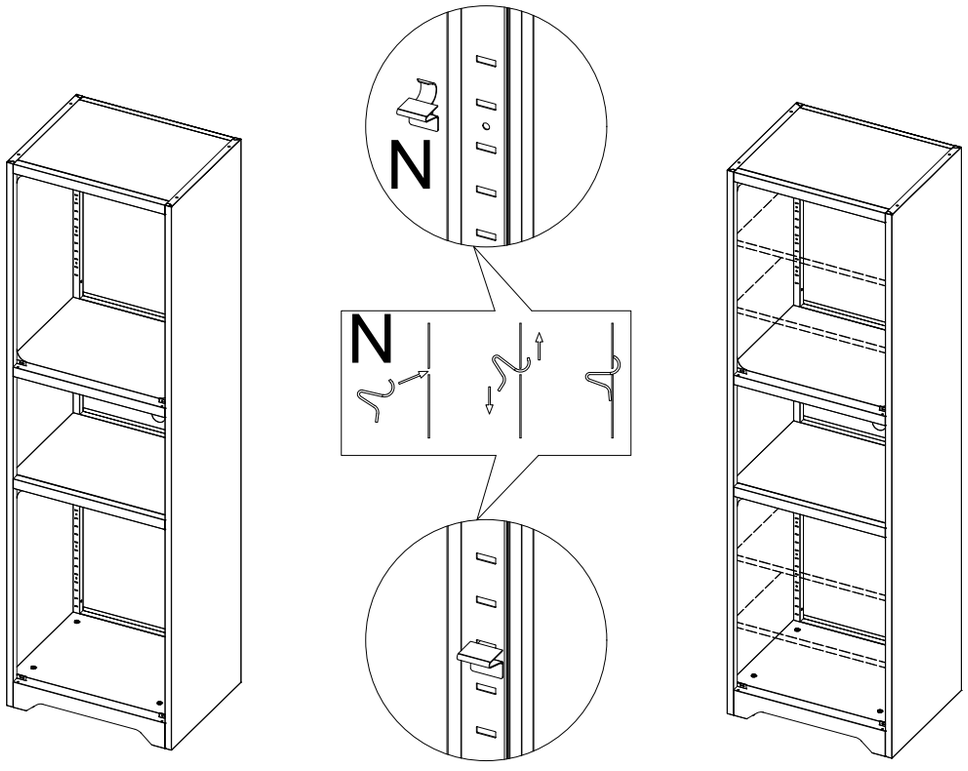

 N×16


15

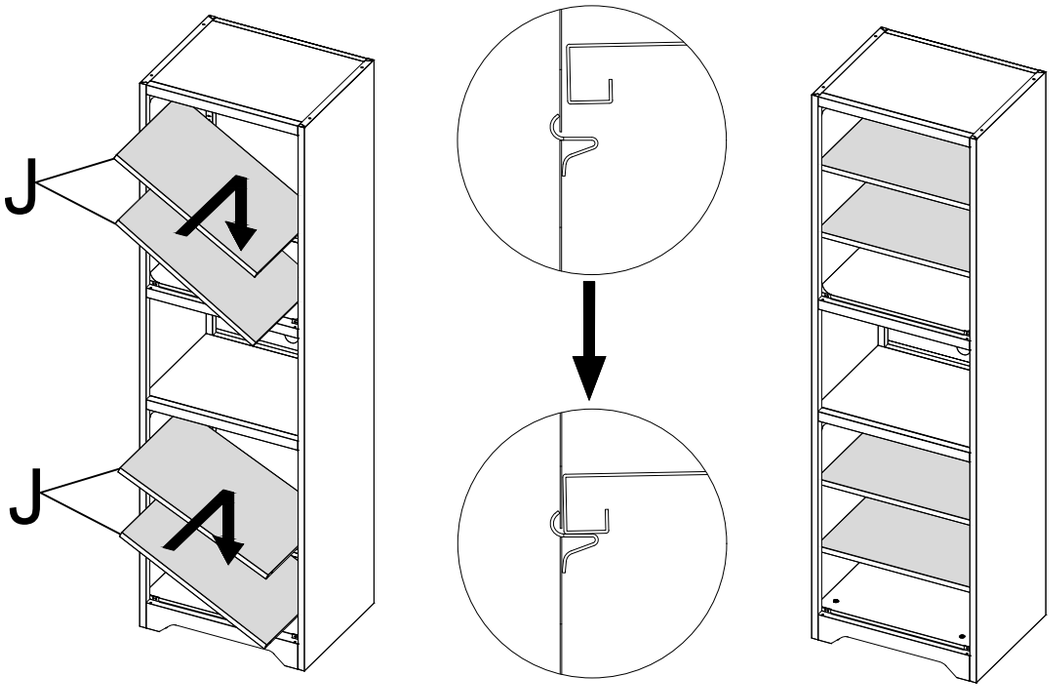

16

Insert magnet Q into the round holes at the top and bottom left corners of the door edges, respectively.


Install two door handles S on the door panels of both doors.

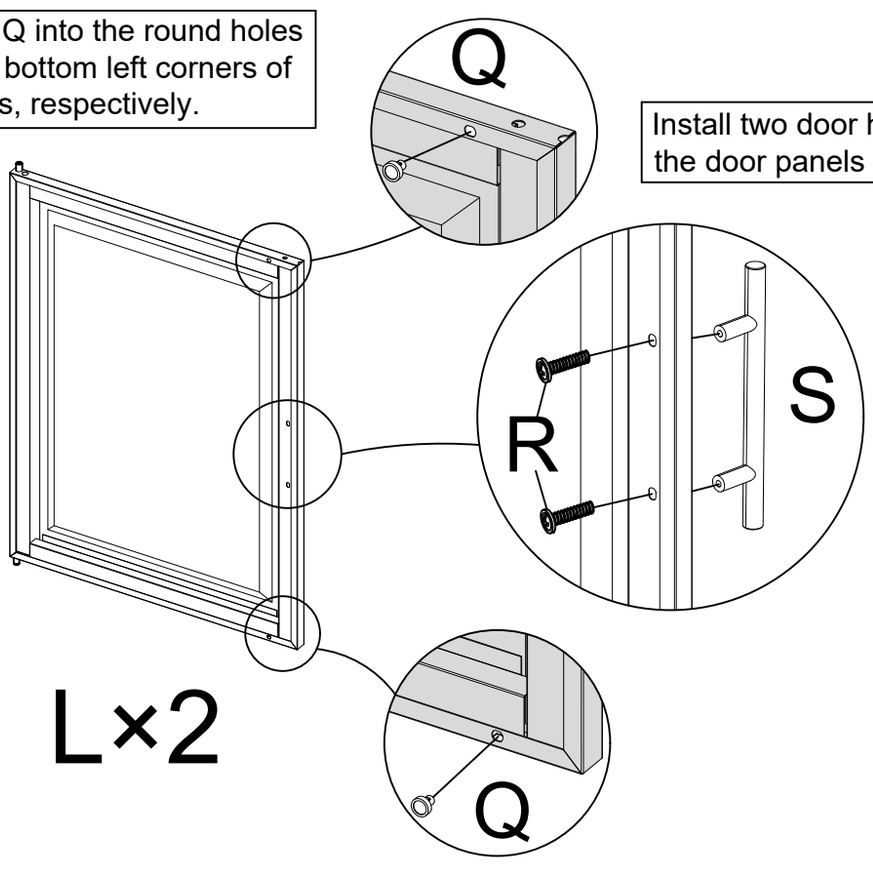

Q×4	R×4	S×2


17

If the spring screw is missing from the door, you can find the screw U in the hardware package to install it.

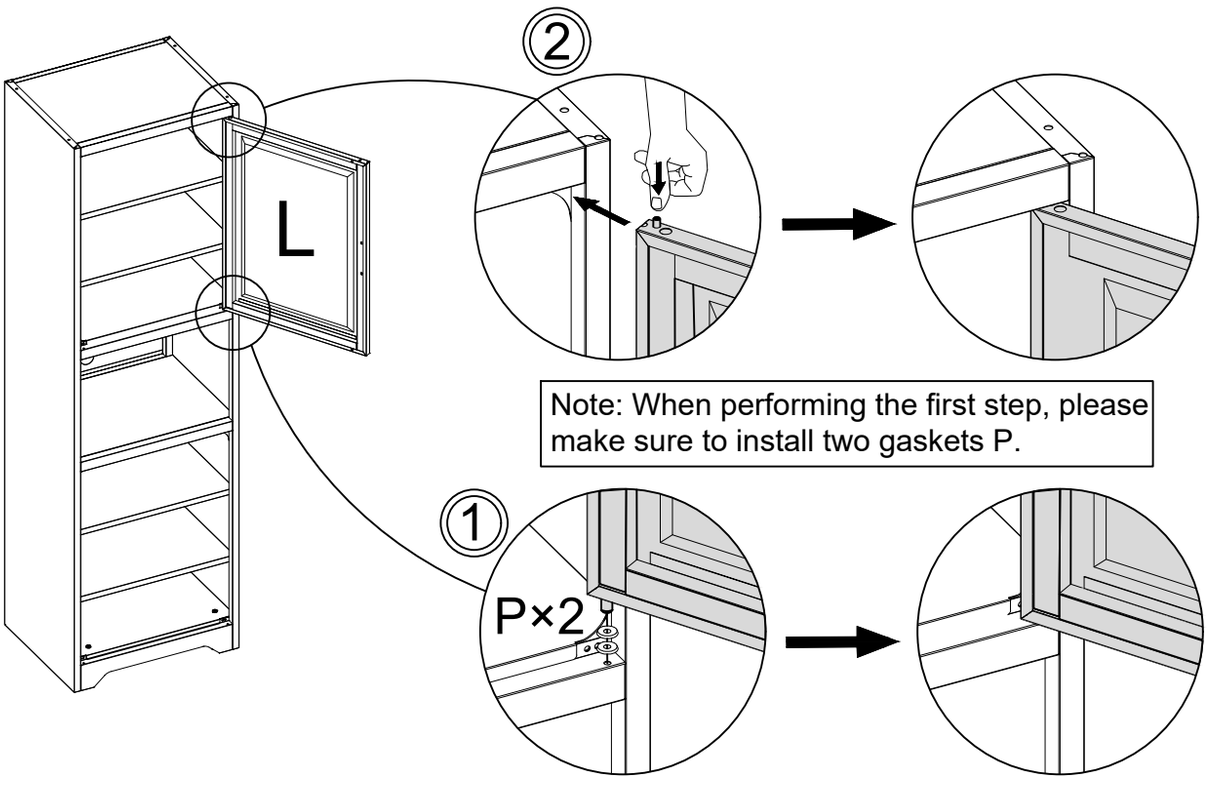

or


If the spring screw is missing from the door, you can find the screw U in the hardware package to install it.

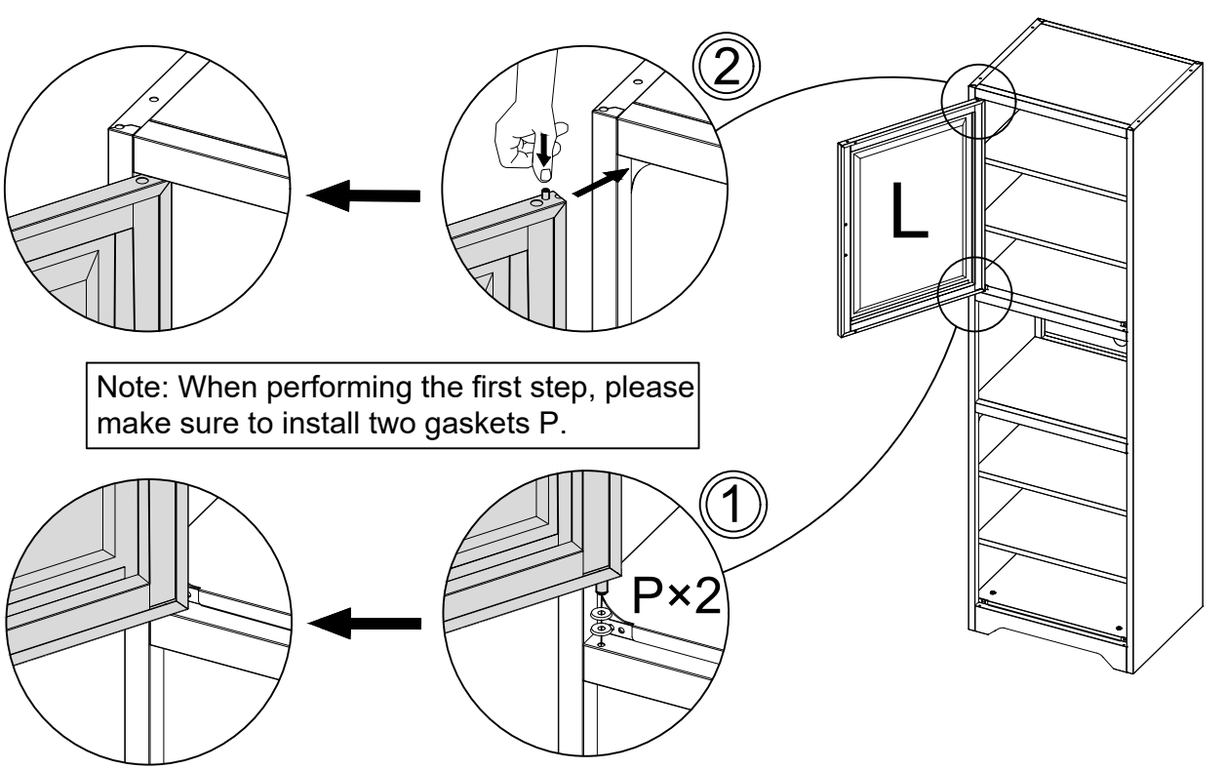

U×1	P×2

18


If the spring screw is missing from the door, you can find the screw U in the hardware package to install it.

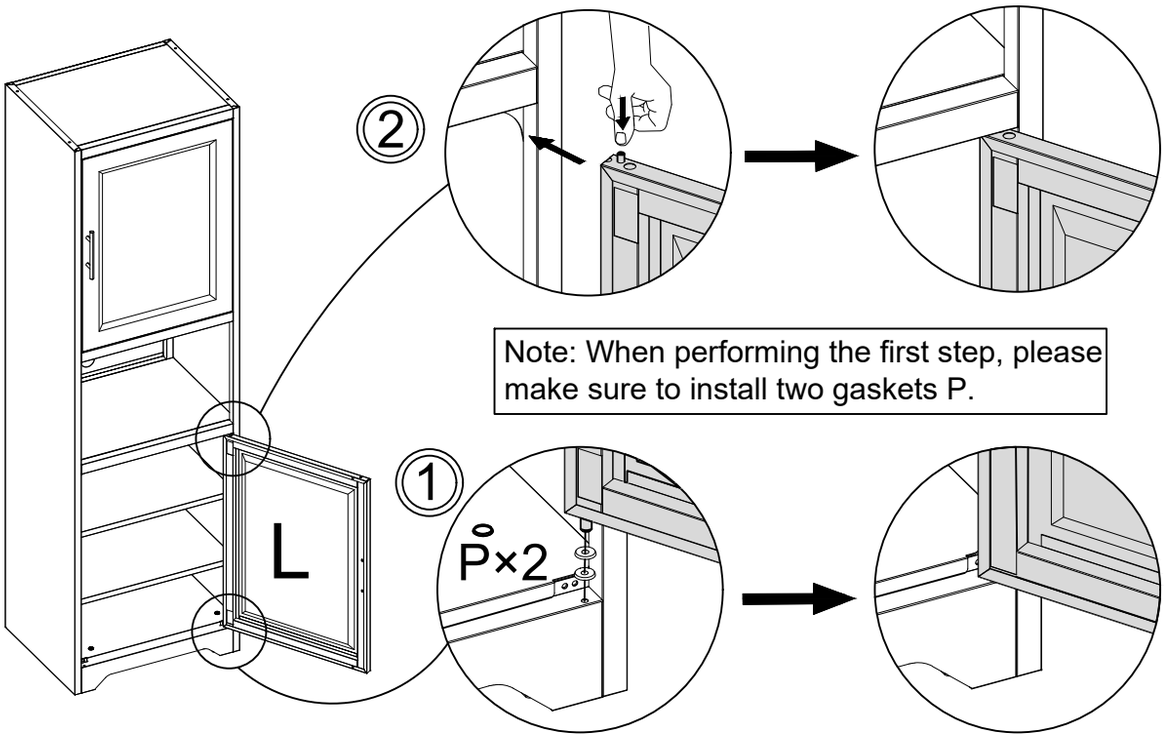

Note: When performing the first step, please make sure to install two gaskets P.

or


If the spring screw is missing from the door, you can find the screw U in the hardware package to install it.

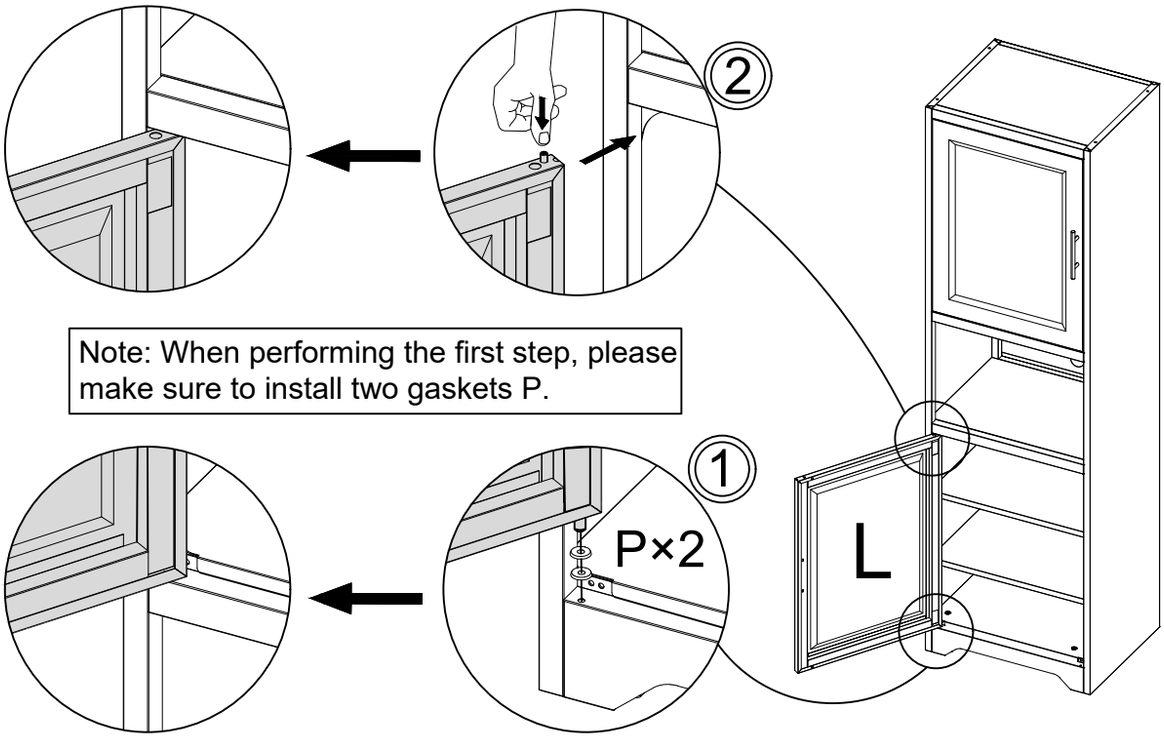

Note: When performing the first step, please make sure to install two gaskets P.

U×1	P×2

19

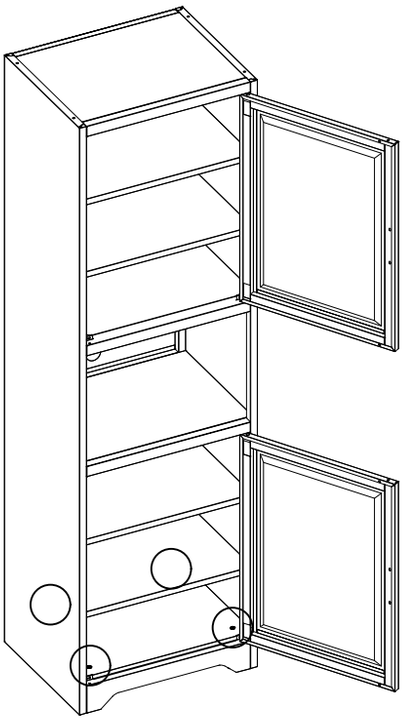

If the ground is uneven, it can be adjusted by rotating the screw V.This will fix the situation that the door is not easily opened or closed.

