



• This dog crate requires Two Adults for assembly.

- Please do not tighten screws until completely assembled especially when installing the door latches.
- Please avoid using power tools, such as power drills, during assembly.They may overtighten screws, leading to stripped threads.

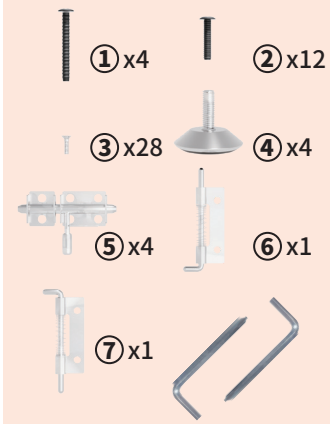


01

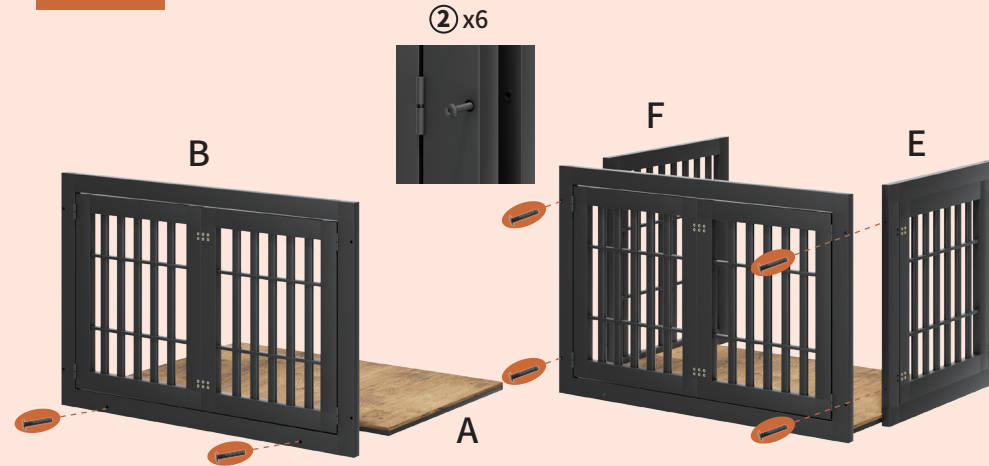


1. Connect bottom panel A with front panel B using screw ② . Then connect side door E and side panel F with front panel B using screw ② . **Notice:** Please make sure the metal frame side of bottom panel A is facing down.

02

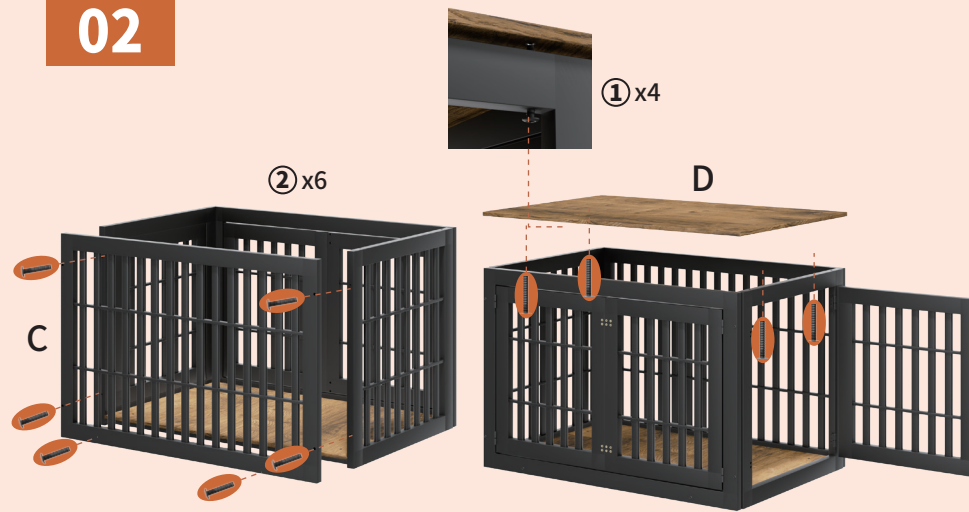


2. Connect back panel C with side door E, side panel F, and bottom panel A using screw ② .Then open side door E and install top panel D using screw ① .

03

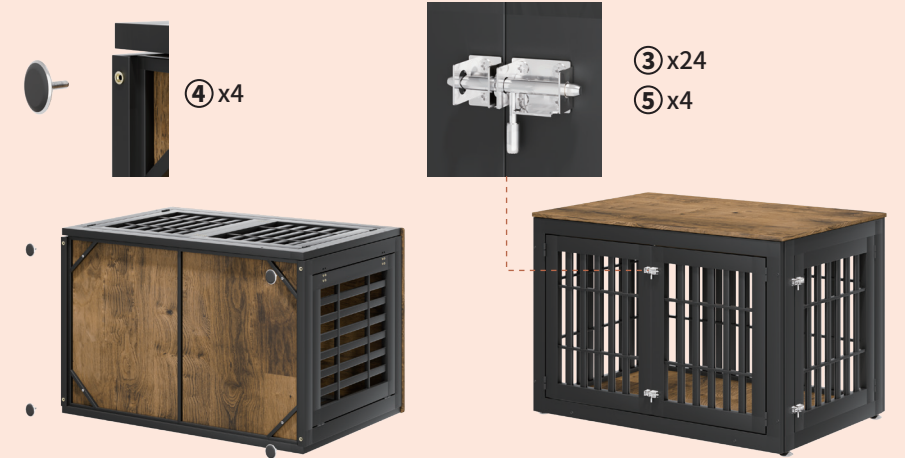

3. Install leg levelers ④ into the bottom of the side door E and side panel F. Then install door latches ⑤ on front panel B and side door E using screw ③ .

04

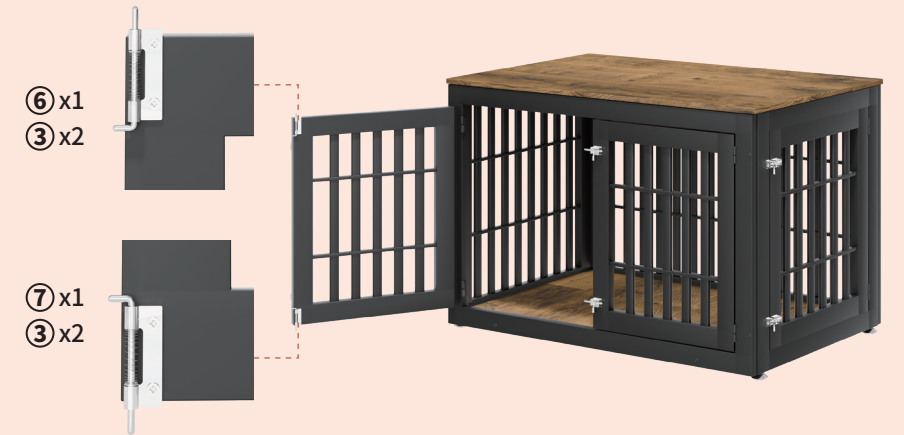

4. Install top bolt ⑥ and bottom bolt ⑦ using screw ③ . **Notice:** Please make sure the position of the top and bottom bolts are as shown in the picture.