




X-318

User manual

This manual elucidation how use with accuracy  
ComputerX-318building.

Please according to this manual rules distance  
.caution operation

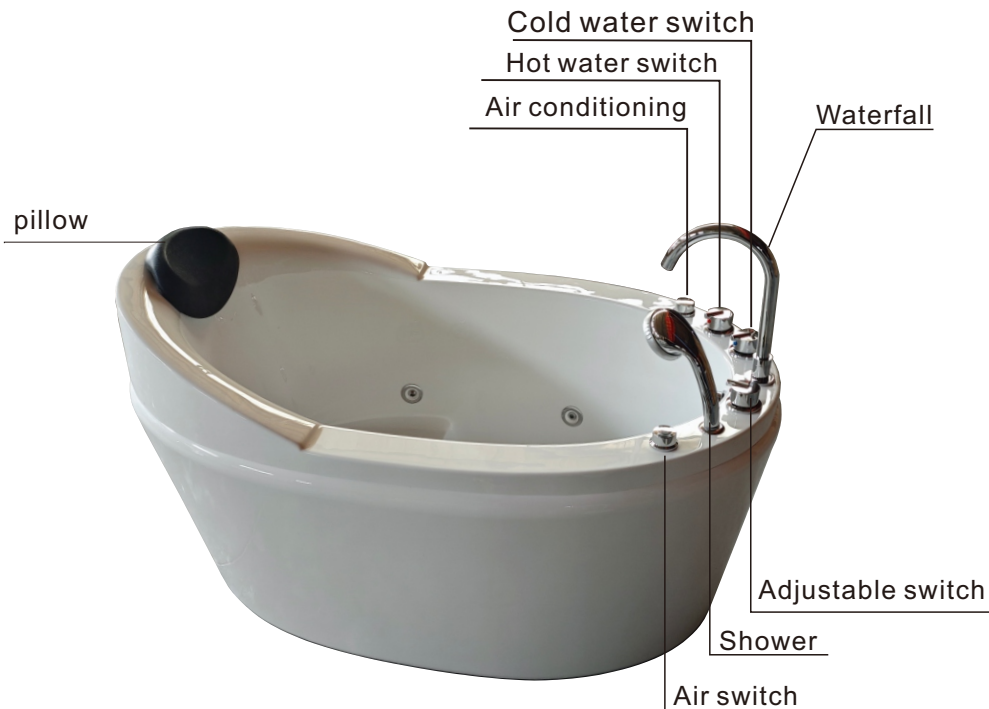

Massage



Notice

1. Be careful :avoid electric shock ,make sure fix creepage protection switch.
2. Make sure the electricity connect to the grounding ,the equipment must fix efficient grounding.
3. The equipment is just used for massage bathtub.

Advert : The above fittings is according to client' need.

Cleanness and maintenance:

- A) The daily cleanness of the bathtub can use ordinary liquid detergent and soft fabric. Do not use acetone or ammonia water or other products containing these two components. Otherwise, the surface will lose brightness or the material will be destroyed badly.
- B) Do not use products containing formic acid or formaldehyde.
- C) If want to keep the brightness of the surface after several year use, can use anti-scuffing paste to polish and the surface will be bright like new one.
- D) For blotch can not be erased, can use tooth paste and soft fabric to wipe up. To clean the lime stain or rust, the best method is using lemon or vinegar and soft fabric to wipe up when hot.

Important: the appliance is not to be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction

children being supervised not to play with the appliance. Children is not

allowed to use the product alone, adult accompany is necessary.

(3) The user should make sure the effectiveness of the grounded facilities and accordance with the national safety standard. Install the earth leakage protection well and keep the switch far away from the area water can attain.

(4) Parts containing live parts, except parts supplied with safety extra-low voltage not exceeding 12 V, must be inaccessible to a person in the bath

(5) Earthed appliances must be permanently connected to fixed wiring

(6) Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules

(7) Do not let the water drops into the impeller of the water pump, otherwise the water pump will be short circuit and burn out.

(8) Cut off the power source when trouble shooting, maintenance should be done by professional.

(9) the maximum permissible inlet water pressure is 600kPa.

(10) The appliance should be supplied through a residual current device (RCD) with a rated tripping current not exceeding 30 mA.

(11) If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard