



1

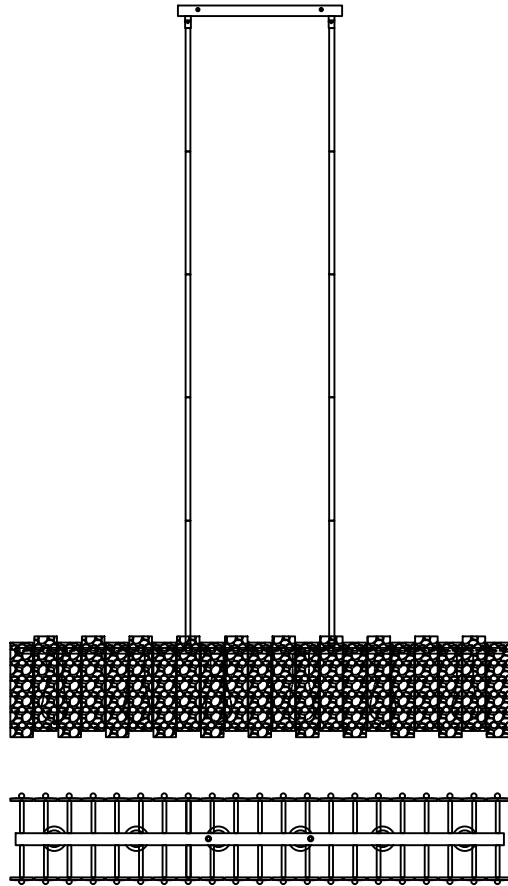

Note:


1. This product is suitable for 120V voltage, please cut off the power supply before installation.
 2. Take the lamps and accessories out of the packing case and enter them according to the installation diagram Line assembly. Please ensure that the installation is firm and reliable, so as not to fall off the lamp and hurt people.
 3. Do not wipe the lamp with gasoline or water, not in order to avoid bad contact
- Danger of fire and electric shock while freely pulling and twisting wires, use clean ones
- Clean the lamp with a soft cloth. Pay attention to the temperature when the lamp works to prevent burns

2

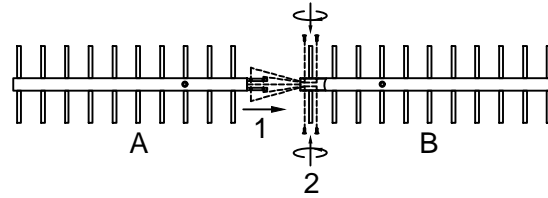


- 1: Insert lamp body A into lamp body B and lock with countersunk screws

3

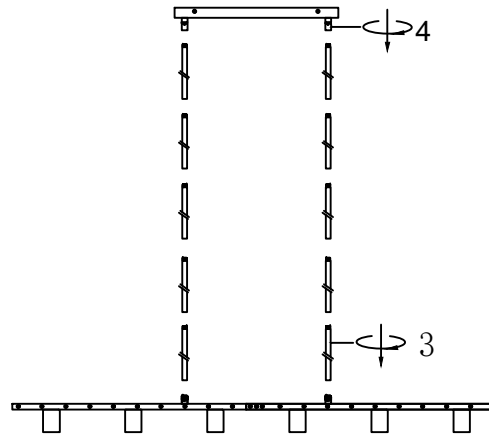


- 2: Turn straight tube 3 to lamp face with ceiling square box 4 knob tight
- 3: Take the plate out of the square box

4

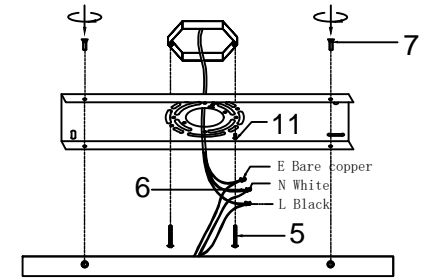

- 4: Screw the plate to the junction box, Lock the suction square box with countersunk screw 7

5

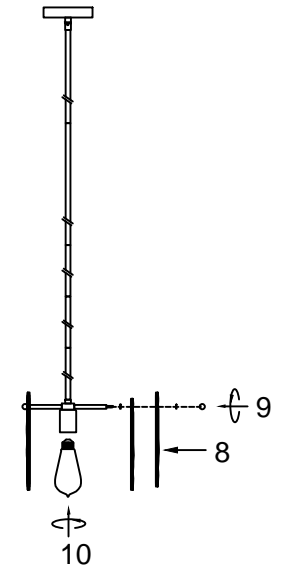

- 5: Stick the glass piece 8 into the lamp body with 9 hair Iron lock
- 6: Finally, turn the light source 10 knob on the lamp body