

Installation Manual

Safety Instructions:
(Please read carefully before first use)

1: Do not exceed the specified power range (110V ±10%, 50Hz). Operating the fixture at a non-rated voltage for an extended period may lead to premature damage.


2: This fixture is for indoor installation only.

3: The default parameters of this fixture are set at the factory. Do not connect any external dimming devices to avoid malfunction.

4: The light source for this fixture is an E26 socket-type bulb. Please purchase separately.

5: If any abnormalities occur with the fixture, immediately turn off the power and contact customer service. Provide the model and specifications when requesting repairs. Check the label on the fixture body for verification.


Installation steps

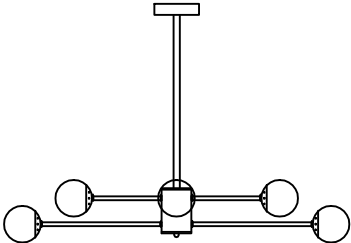



- 1: Connect the six lamp holders to the central light column.
- 2: Install the E26 bulbs and glass shades.
- 3: Connect all the black wires together and connect all the white wires together.
- 4: Attach the top cover and bottom cover to the central light column.
- 5: Install the suspension rod and base plate, choosing the length of the rod according to the ceiling height.
- 6: Secure the mounting bracket to the ceiling.
- 7: Connect the lamp's power wires to the household power wires.

8: Lift the lamp, align the holes in the base plate with the holes in the mounting bracket, and secure with screws.


Installation Diagram

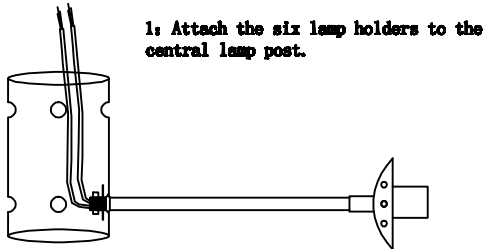


2: Install the E26 bulbs and glass lampshades.

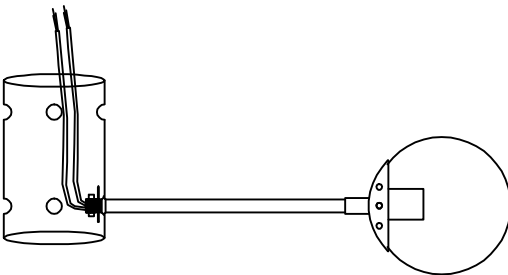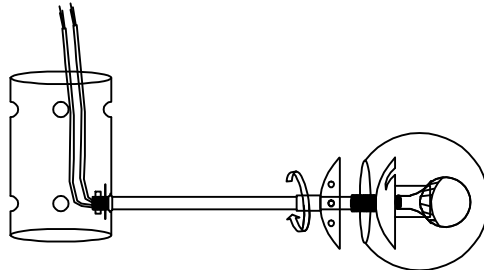


3: Connect all black wires together and all white wires together.

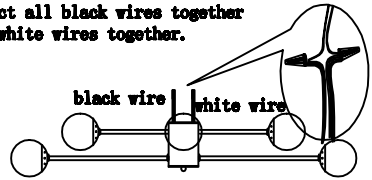


4: Attach the top and bottom covers of the central lamp post.

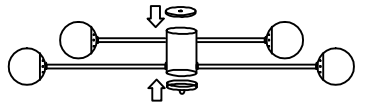


5: Install the suspension rods and the base plate, choosing the length of the rods according to the ceiling height.

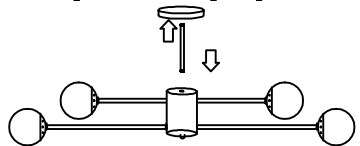

6: Secure the mounting bracket to the ceiling.

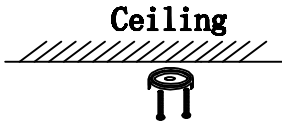

7: Connect the lamp's power wires to the household power wires.

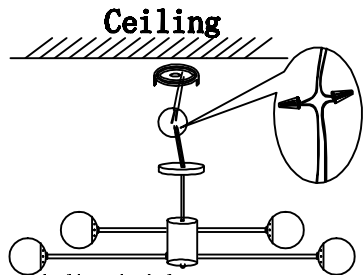

8: Raise the lamp and align the holes in the base plate with the holes in the mounting bracket, then fix them with screws.

