



Please watch the installation video on the details page

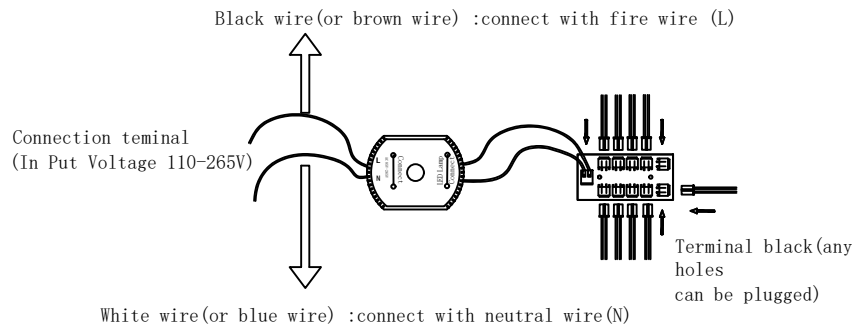

## Installation Steps:

1. Install the "+"metal mount.
2. Remove the protective film wrapped on the lamp body, do not use knives or sharp instrument, so as not to scratch the light body or wire insulation layer.
3. Install three light frames to the light fixture plate
4. Test circuit: Connect the power wires with a temporary wire for testing if the light is working properly before install it to the ceiling.
5. Installation: Fix the lamp body to the cross hardware hanger, connect the power wires with the connecting terminals.
6. Turn on the power and double check again, the installation is complete.


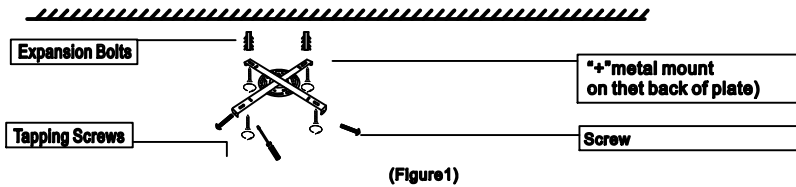


## Warning!


- 1) Please install by professional.
- 2) The voltage available for 110-260V only.
- 3) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you cleaning the lighting fixture.
- 5) Keep away from acidic & corrosive material.

## Installation instructions


This job will go easier with two people, because the light needs support during assembly, and it helps having somebody to read the directions. I am referring to the acrylic pieces "the frame" and the round metal thing as "the light fixture metal plate."




## installation steps



1. Threading the wire through to the middle hole of the light fixture plate. The position show on the picture.
  2. Fasten the first frame (use 23MM screw) to the light fixture metal plate with lock washer and a nut. The position show on the picture. It will look very flat, not 3D.
- Notice: fasten the screws into corresponding holes on the side of the round metal fixture




1. Threading the wire through to the middle hole of the light fixture plate. The position show on the picture.
  2. Fasten the second frame (use 23MM screw) to the light fixture metal plate with lock washer and a nut. The position show on the picture. It will look very flat, not 3D.
- Notice: fasten the screws into corresponding holes on the side of the round metal fixture



1. Threading the wire through to the middle hole of the bottom light fixture plate at the edge.
2. Fasten the third frame (use 10MM screw) to the light fixture metal plate with lock washer and a nut. The position show on the picture. It will look very flat, not 3D.

Notice: fasten the screws into corresponding holes on the bottom of the square metal fixture

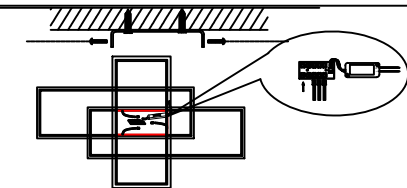

- 5: First: Very carefully plug the 3 tiny little plugs to the control block, any hole can be plugged.
- Second: after finishing install the light fixture you can install it to your ceiling.

Notice:

The black wire(or brown wire) is connect to fire wire(L):  
The white wire (or blue wire) is connect to neutral wire (N)