


1



N:wh te
L black
Green

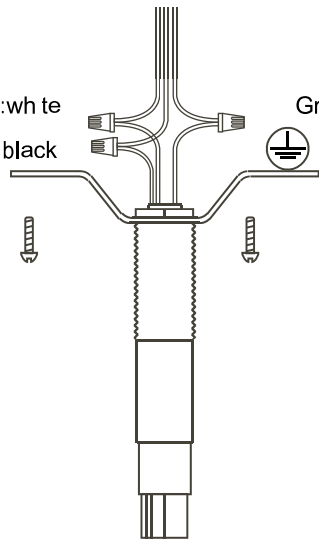


2

3




4

5

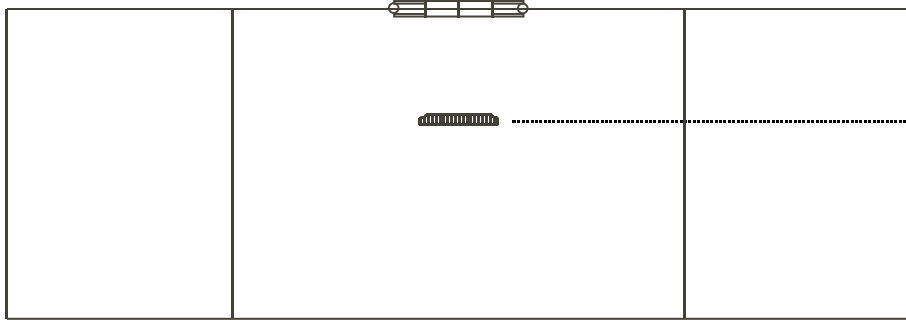

6

7

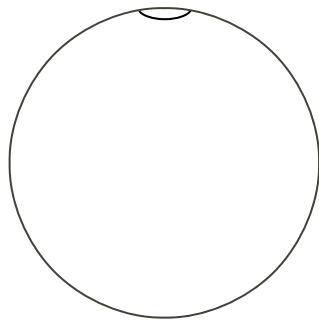

8



G9 Max 60W Not included

Flush Mount Instruction

Safety Warning

Turn OFF power at the breaker panel before beginning. Verify all wires are de-energized with a non-contact tester.

Installation Steps

• Step 1: Prepare the Mounting Assembly

Thread the long mounting nipple (the metal rod) into the cross-shaped bracket and lock it with the supplied hex nut. Attach the bracket to the ceiling junction box using the two machine screws provided. The threaded rod should hang straight downward.

• Step 2: Electrical Connections

1. Hot: Connect fixture black wire to house black (hot) wire.
2. Neutral: Connect fixture white wire to house white (neutral) wire.
3. Ground: Connect fixture green/bare wire to house ground/bare copper wire or the green ground screw on the bracket.
4. Tighten all wire-nuts clockwise and tuck the connections neatly into the junction box.

• Step 3: Install the Inner Canopy Plate

Slide the slim rectangular metal plate up over the threaded rod until it sits flush against the ceiling.

• Step 4: Secure the Plate

Thread the flat washer and decorative hex nut onto the protruding rod. Tighten until the inner plate is snug against the ceiling surface.

• Step 5: Position the Outer Shade

Raise the large rectangular shade and align its center opening with the threaded rod.

• Step 6: Lock the Shade in Place

Install the decorative cap (or knurled nut) onto the rod to secure the shade firmly. Do not overtighten.

• Step 7: Install the Bulb

Insert one G9 base bulb (max 60 W, not included) straight into the socket until it clicks fully into place.

• Step 8: Attach the Diffuser (if included)

Center the round diffuser beneath the shade and fasten it using the supplied thumb screw or retaining ring.

Final Check

Restore power at the breaker panel and test the fixture. The shade should sit level, the diffuser firmly attached, and the G9 bulb should illuminate without flicker.