

artos[®]

F907-20

INSTALLATION GUIDE

multi-function flexible hose
shower kit with integrated
water connection round


BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



artos[®]

F907-20

multi-function flexible hose
shower kit with integrated
water connection round

OPERATING SPECIFICATIONS



FEATURES

Integrated Water Outlet
60" Flexible Hose

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY

1.8 USGPM

INLET/OUTLET

1/2" Female NPT

REQUIREMENTS


This unit requires a control

artos[®]

F907-20

PRODUCT DIMENSIONS


multi-function flexible hose
shower kit with integrated
water connection round

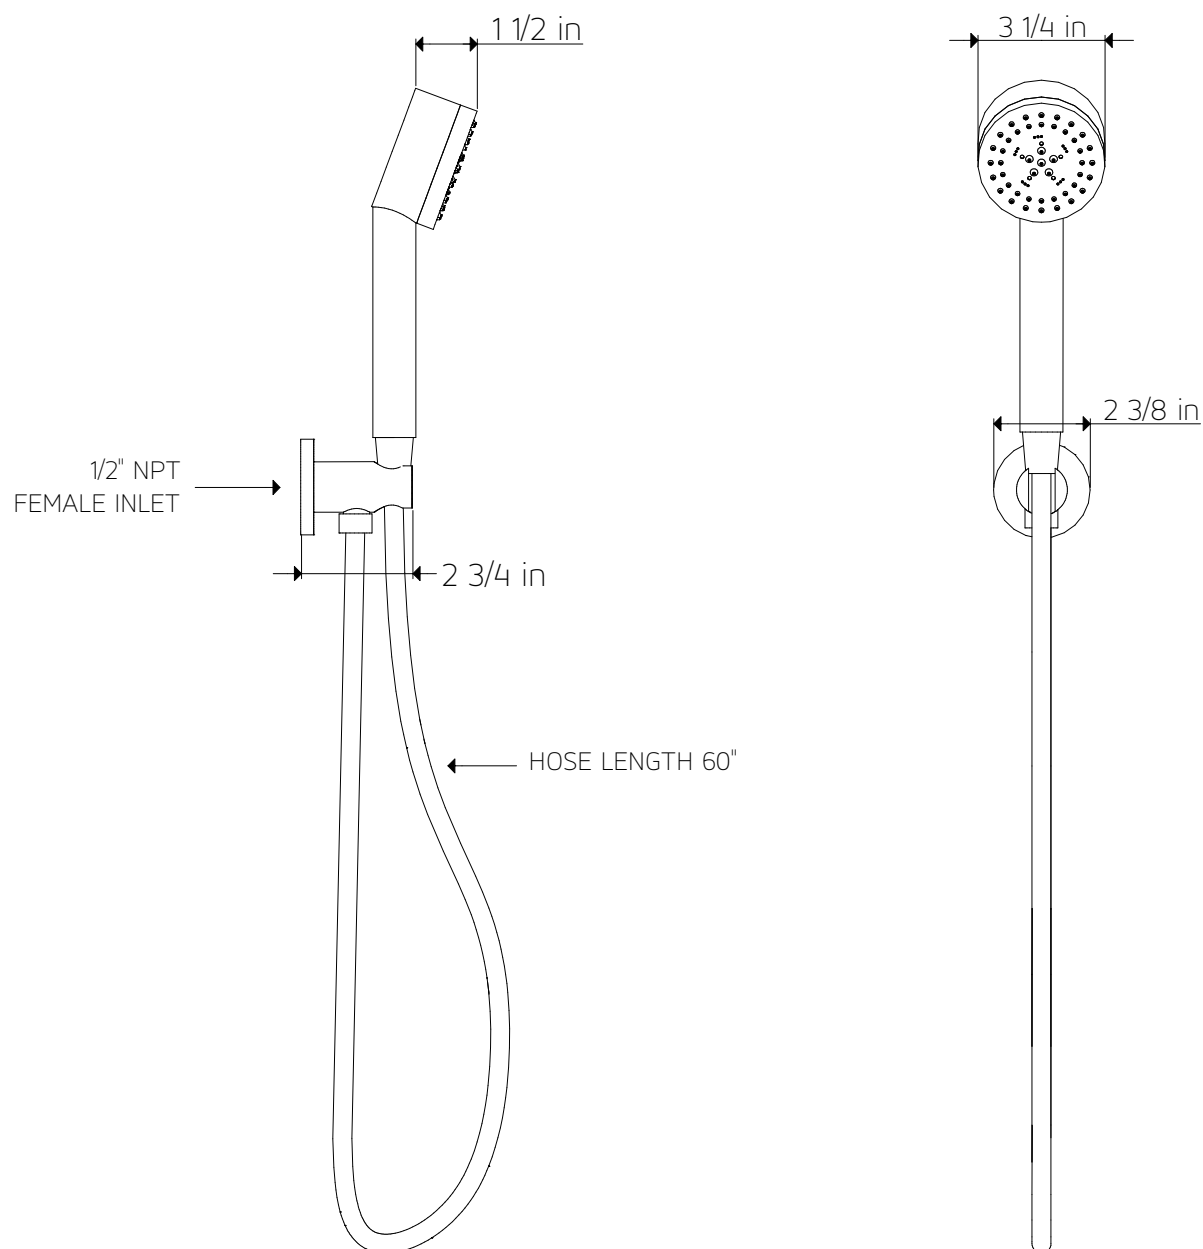


F907-20

multi-function flexible hose
shower kit with integrated
water connection round

STEP 1

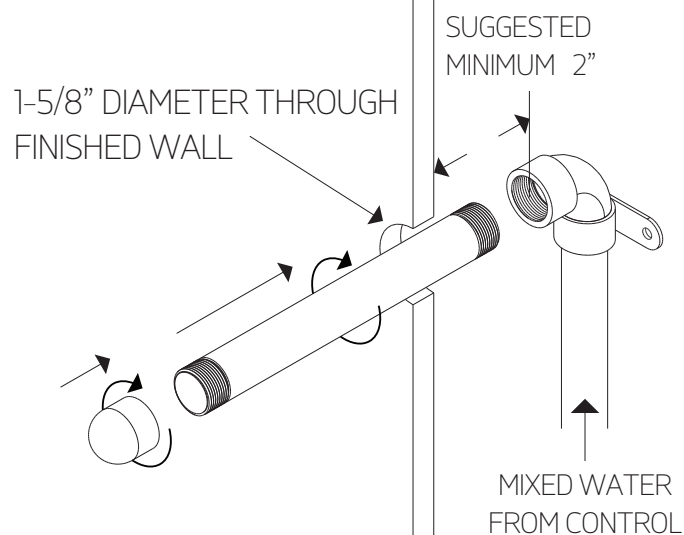


STEP 2

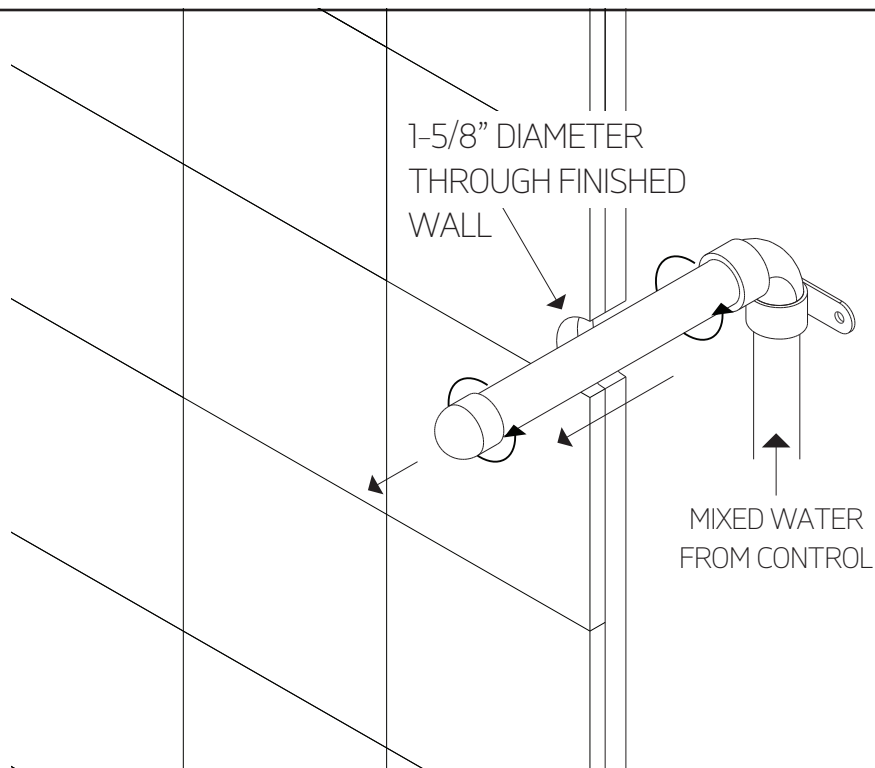


INSTALLATION STEPS

STEP 3

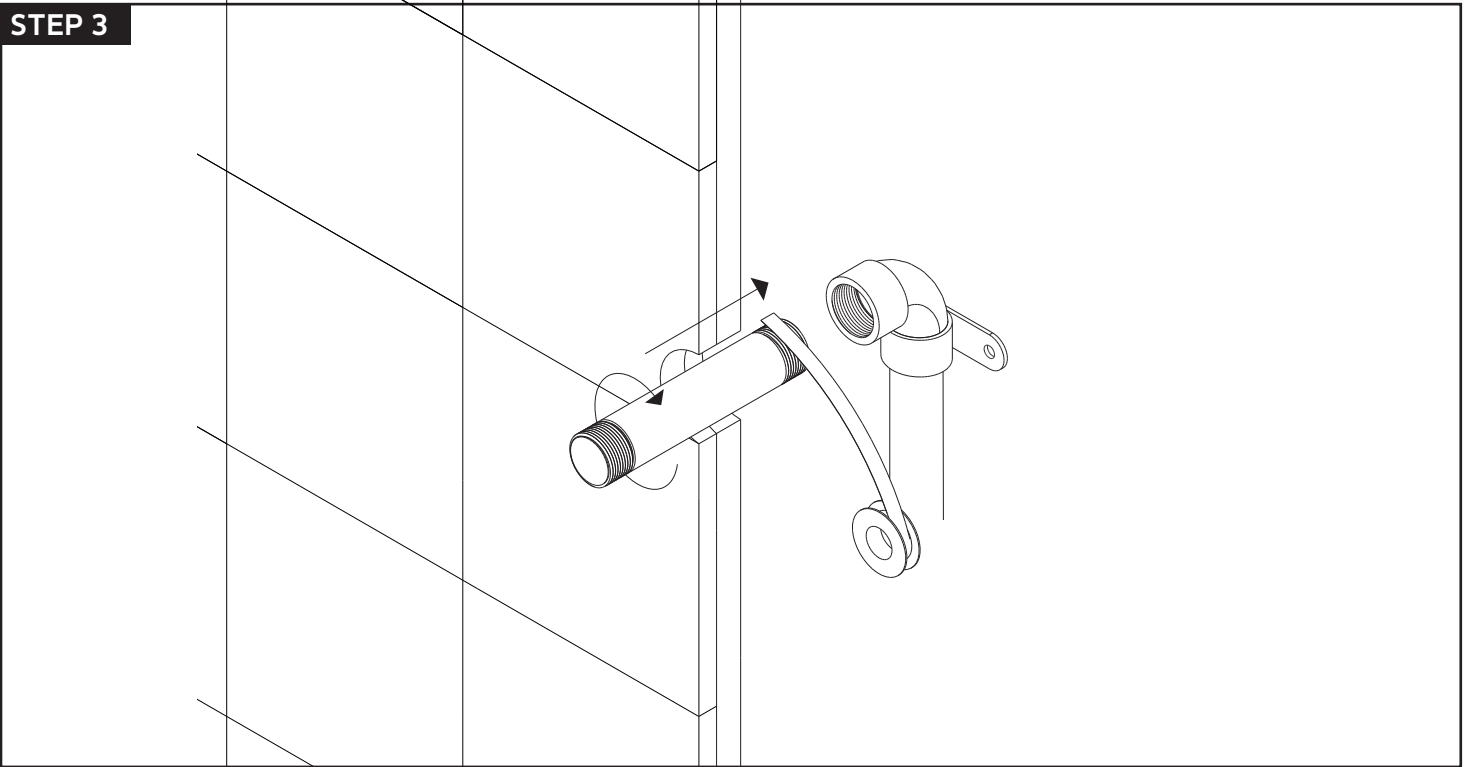

STEP 4

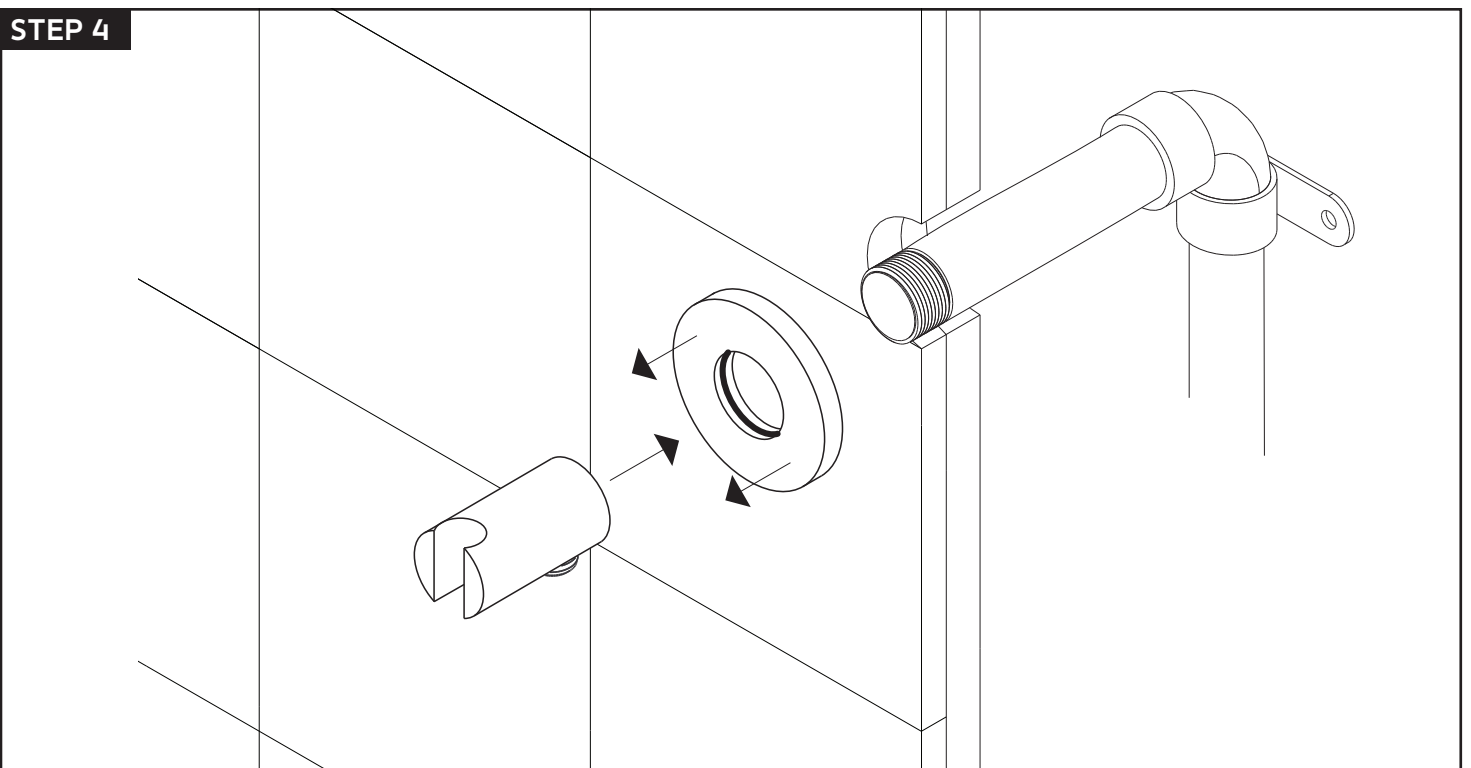


artos[®]

F907-20

multi-function flexible hose
shower kit with integrated
water connection round

STEP 5

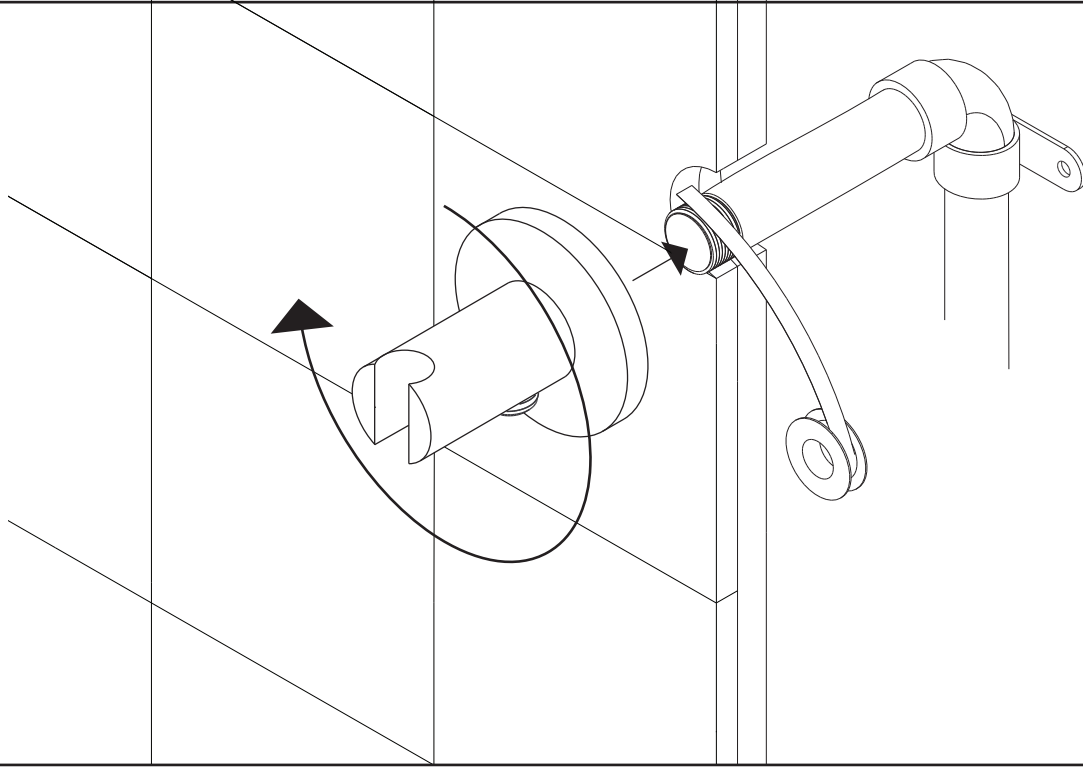


artos[®]

F907-20

INSTALLATION STEPS

multi-function flexible hose
shower kit with integrated
water connection round

STEP 1

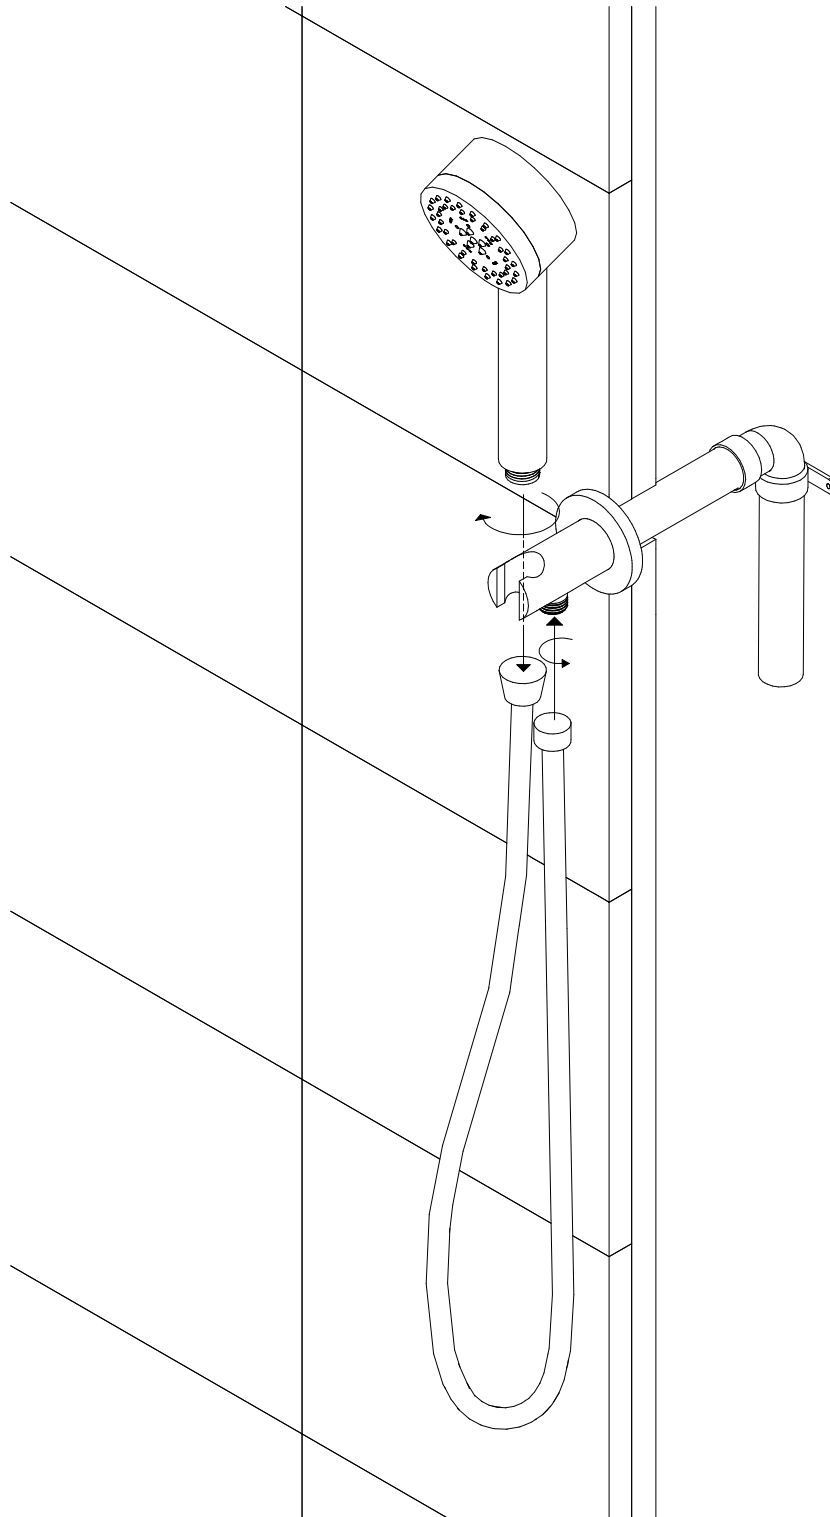


artos[®]

F907-20

PARTS BREAKDOWN

multi-function flexible hose
shower kit with integrated
water connection round

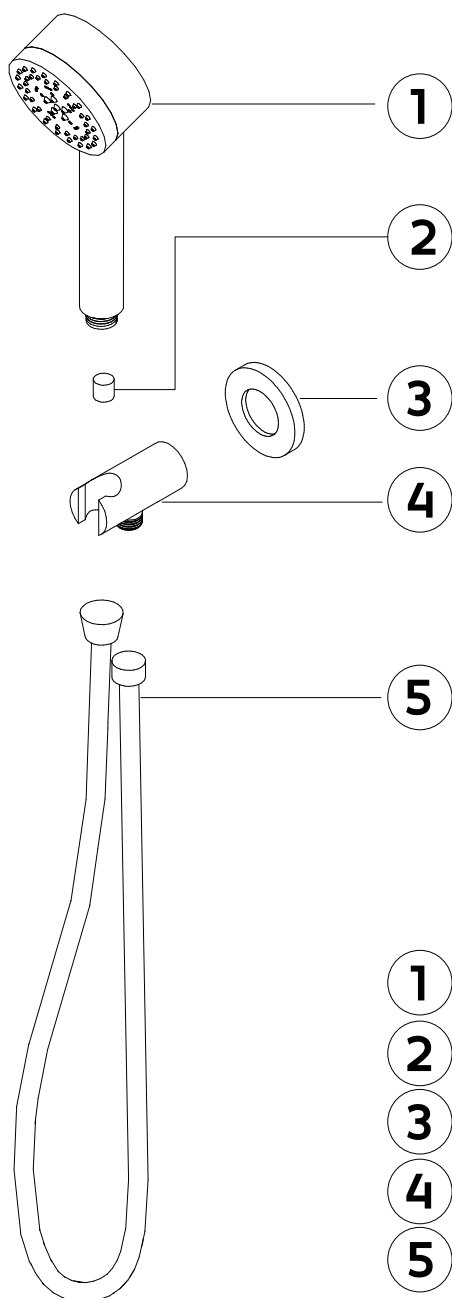

- 1 HAND SHOWER
- 2 HAND SHOWER CHECK VALVE
- 3 ESCUTCHEON
- 4 SHOWER OUTLET ELBOW AND HOLDER
- 5 SHOWER HOSE