

INSTALLATION GUIDANCE


1/1



① *1



② *1

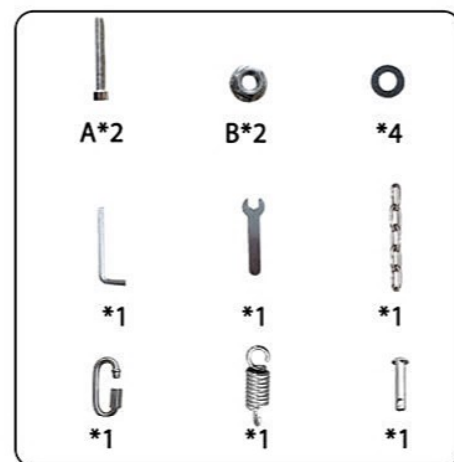

First, slightly open the front frame, lock both sides of the basket with screw A&B and gaskets (as shown in the picture).



Second, place the plug and hook, hang the basket and lock it with a buckle. Then put the cushion on the seat and tie the straps on both sides.

